

MULTI 1 NE

PRODUCTS HANDBOOK



R.220



GLOSSARY

Tipping load, max.	It's the load, lifted just off the ground, that will cause to achieve the tipping limit condition. Machine is straight, with rear weights, on firm, level ground and boom not extended. Weight of attachment included, the tipping load is the value indicated minus the weight of the attachment. Load is distributed evenly on pallet forks, with the load centre of gravity at 500 mm from the vertical part of pallet fork arms.
Lifting capacity straight, max.	It's the maximum load that can be lifted just off the ground when the machine is straight on firm level ground, with rear weights and boom not extended. Weight of attachment included, the net lifting load is the value indicated minus the weight of the attachment. Load is distributed evenly on pallet forks, with the load centre of gravity at 500 mm from the vertical part of pallet fork arms.
Max. lift height	It's the height of the coupling plate pivot point with extended boom.
Breakout force / 50 cm	Rollback force measured at 500 mm from the pivot point, max value.
Pushing force	Calculated (c) pushing force of the machine with 100% efficiency and with smallest wheels available.
Drive speed (max.)	Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.
NA	Item not available.

Note:

- Never exceed the rated lifting or hydraulic capacity of the machine.
- When using attachments, know their capacity ratings and machine limitations. Machine specifications can be found in the Operator's Manual.
- If not specified, all dimensions have been taken with standard tires.
- All products listed in this catalogue may not be available on all markets and countries. Please consult your local MultiOne dealer for availability.
- Compatibility table between attachments and loader models are advisory. Please consult your local MultiOne dealer to make sure that the attachment is compatible with your MultiOne mini loader.








TABLE OF CONTENTS

LOADERS	4	TRENCHER	86
1 SERIES: 1.1	4	MINI DIGGER	87
2 SERIES: 2.3 EFI	6	BACKHOE	88
4 - 5 SERIES: 4.2 K - 5.2 K	10	RADIO CONTROLLED BACKHOE	89
5 SERIES: 5.3 K	12	AUGER	90
6 SERIES: 6.3+ K	16	OPTIONS FOR AUGER	91
7 SERIES: 7.2 K	20	GRADER	92
8 SERIES: 8.4S K	24	CEMENT MIXER	93
8 SERIES: 8.5S K	26	CONCRETE MIXING BUCKET	94
11 SERIES: 11.6 K	30	COLD PLANER	95
11 SERIES: 11.9 K	32	HYDRAULIC BREAKER	96
EZ SERIES: EZ5	36	SCREENING BUCKET	97
EZ SERIES: EZ7	40	ESTATE & PROPERTY MAINTENANCE	98
EZ SERIES: EZ8	42	SWEEPER WITH COLLECTOR BOX	98
WHEELS	47	LEAF VACUUM	99
OPTIONS	48	WEED BRUSH	100
BUCKETS, MATERIAL HANDLING	56	DEBRIS AND LEAF BLOWER	101
GENERAL BUCKET	56	SOLAR PANEL WASHER	102
NEW GENERAL BUCKET	57	ROTARY SWEEPER	103
LEVELLING BUCKET	58	SNOW BLADE	104
COMBO BUCKET	59	SNOW PLOW	105
GRAPPLE BUCKET	60	SNOW BLOWER	106
DEMOLITION GRAPPLE BUCKET	61	SALT AND SAND SPREADER	107
LIGHT MATERIAL BUCKET	62	DROP SPREADER	108
NEW LIGHT MATERIAL BUCKET	63	TRAILER	109
HIGH TIP BUCKET	64	HIGH PRESSURE WASHER	110
PALLET FORK	65	STAKE INSTALLER	111
PALLET FORK HYDRAULIC CLAMP	66	AERIAL WORK PLATFORM	112
JIB CRANE, ONE-PIECE OR TELESCOPIC	67	STREET WASHER	113
BIG BAG LIFTER	68	GROUND CARE	114
PALLET FORK WITH SIDE SHIFT	69	FLAIL MOWER WITH SIDE SHIFT	114
LIFTING TROLLEY	70	FLAIL MOWER	115
JOB SITE TOOLBOX	71	HEAVY DUTY FLAIL MOWER	116
FARMING	72	SIDE BOOM WITH FLAIL MOWER DZ1	117
HEAVY DUTY SILAGE FORK	72	SIDE BOOM WITH FLAIL MOWER DZ2	118
MANURE FORK	73	TORNADO LAWN MOWER	119
BALE HANDLER	74	LAWN MOWER	120
HAY BALE GRAPPLE	75	SPIKE AERATOR	121
BALE FORK	76	CORE AERATOR	122
SQUARE BALE CLAMP	77	HEDGE CUTTER	123
HORSE ARENA HARROW	78	SICKLE BAR MOWER	124
HORSE STABLE PACKER	79	LANDSCAPE POT CLAMP	125
FEED DISPENSER	80	TELESCOPIC SIDE ARM M1-15	126
SCREW FEED PUSHER	81	ARTICULATED SIDE ARM M1-30	127
RUBBER SCRAPER	82	SPRAYER	128
PUSH BROOM	83	VINEYARD AND ORCHARD	129
HIVE HANDLER	84	STRING SHOOT REMOVER	129
DIGGING & CONSTRUCTION	85	DUAL BLADE HEDGE TRIMMER	130
DOZER BLADE	85	INTER-ROW MOWER	131
		STAINLESS STEEL TIPPING DUMPER	132

TABLE OF CONTENTS

TREE SHAKER WITH COLLECTOR	133
VINEYARD SPRAYER	134
VINEYARD TOOL CARRIER.....	135
LANDSCAPING.....	136
LEVELER.....	136
ROLLER.....	137
RIPPER	138
ROTARY TILLER	139
POWER HARROW	140
POWER RAKE.....	141
STONE BURIER	142
POWER PLOW	143
POWER AUGER FOR TREE PLANTING.....	144
SWING STUMP GRINDER	145
STUMP GRINDER	146
FORESTRY.....	147
FORESTRY MULCHER	147
BRANCH CUTTER.....	148
TIMBER GRAB	149
WINCH.....	150
TREE SHEAR.....	151
LOG GRAPPLE.....	152
LOG SPLITTER	153
DUMPER	154
HYDRAULIC BIO SHREDDER.....	155
OTHER ATTACHMENTS	156
ALUMINIUM RAMPS	156
OPTIONS FOR ATTACHMENTS	157
SIDE SHIFT ADAPTER.....	157
TILT ADAPTER	158
ATTACHMENT ROTATOR.....	159
MULTI CONNECTOR ADAPTOR FOR MACHINES	160
ATTACHMENT COUPLING PLATE	160
SKID-STEER ATTACHMENT ADAPTER PLATE	160

1 SERIES: 1.1


<http://tiny.cc/multione1-1EN>


Model	1.1
Engine	Yanmar L100 - 1 cylinder - 435cc
Emission Standards	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	12 HP / 21 Nm @ 3000 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.)	8 km/h (5 mph)
Aux. hydraulics oil flow	19 l/min (5 GPM)
Max. lifting height	1,8 m (70.9 in)
Tipping load, max. ⁽¹⁾	320 kg (705 lbs)
Lifting capacity, max. ⁽²⁾	250 kg (551 lbs)
Breakout force / 50 cm (19.7 in)	250 kg (551 lbs)
Pushing force (c)	500 kgf (500 kp)
Average ground pressure (w/standard tires)	298 kg/m ² (61 lbs/sqft)
Turning radius: inside/outside	0/993 mm (0/39 in)
Standard tires (Tractor profile)	18x9.50-8
Weight	398 kg (880 lbs)
Product Code	C926006

⁽¹⁾ Tipping limit with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽²⁾ Maximum load that can be lifted just off the ground. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.





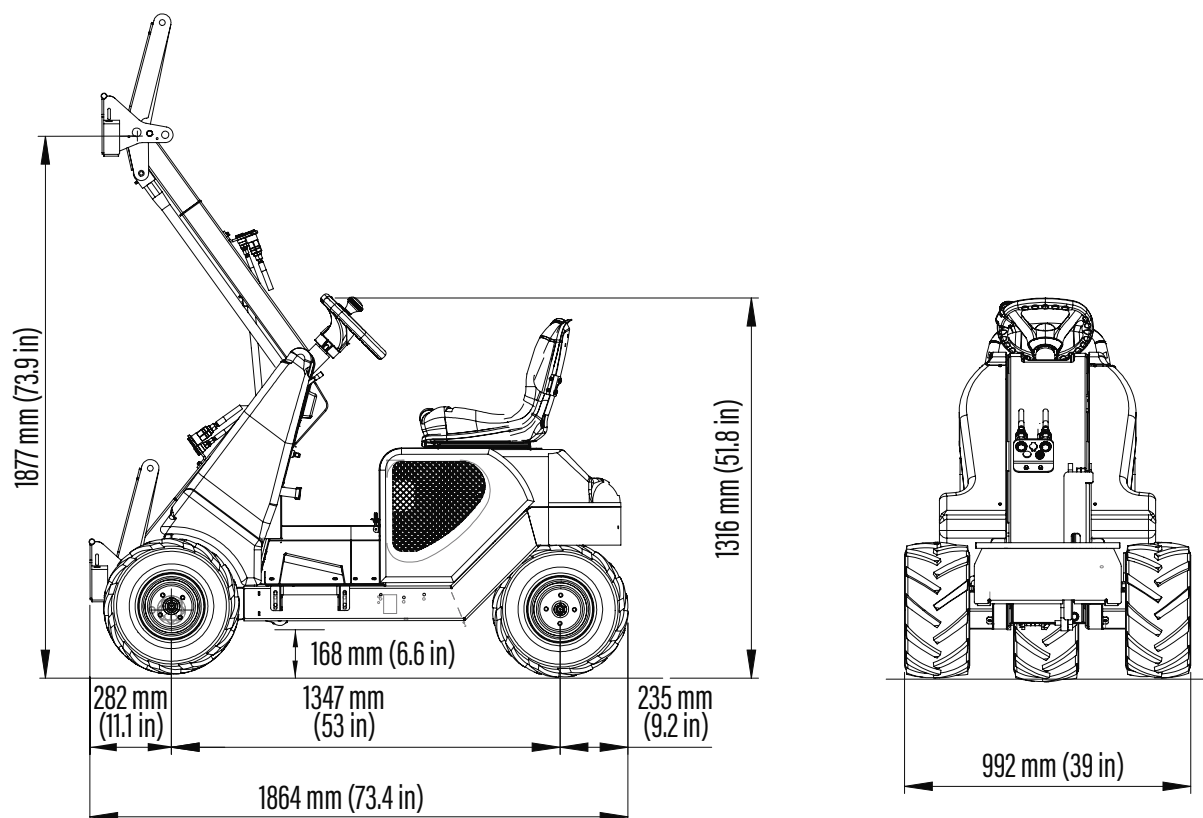


FEATURES

- YANMAR L100 engine, 1 cylinder, diesel engine, 435 cc, air cooled with electric start
- Stage V and Tier 4 Final compliant engine
- 3WD hydrostatic transmission with differential lock
- Variable displacement drive pump
- 3 line hydraulic outlets
- Boom with self-levelling
- 4-functions joystick
- Ergonomic seat with adjustable position
- Mechanical parking brake

Options	CODE
Biodegradable oil	C883059
Gps tracker	C883075
Turf tires 18x9.50-8, set of 3	C885023

2 SERIES: 2.3 EFI

<http://tiny.cc/multione2-2EN>


EFI
ELECTRONIC FUEL INJECTION



Model	2.3 EFI
Engine	Kohler EFI ECV749 - 2 cyl. - 747 cc
Emission Standard	Stage V and EPA/CARB Phase III
Power (Iso Gross) / Torque	26,5 HP / 55,5 Nm @ 2600 rpm
Fuel	Petrol
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	15 km/h (9.3 mph)
Aux. hydraulics oil flow	42 l/min (11.1 GPM)
Max. lifting height	1,6 m (63 in)
Tipping load, max. ⁽²⁾	700 kg (1543 lbs)
Lifting capacity straight, max. ⁽³⁾	560 kg (1235 lbs)
Breakout force / 50 cm (19.7 in)	840 kg (1852 lbs)
Pushing force (c)	770 kgf (770 kp)
Average ground pressure (w/standard tires)	583 kg/m ² (119 lbs/sqft)
Turning radius: inside/outside	700/1698 mm (27.6/66.9 in)
Standard tires (Tractor profile)	20x8.00-10
Weight	710 kg (1570 lbs)
Product Code	C951028

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

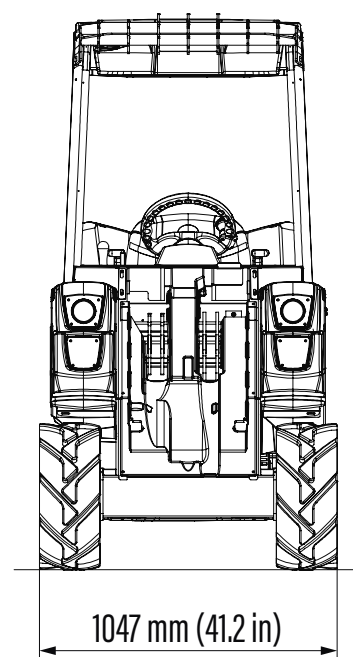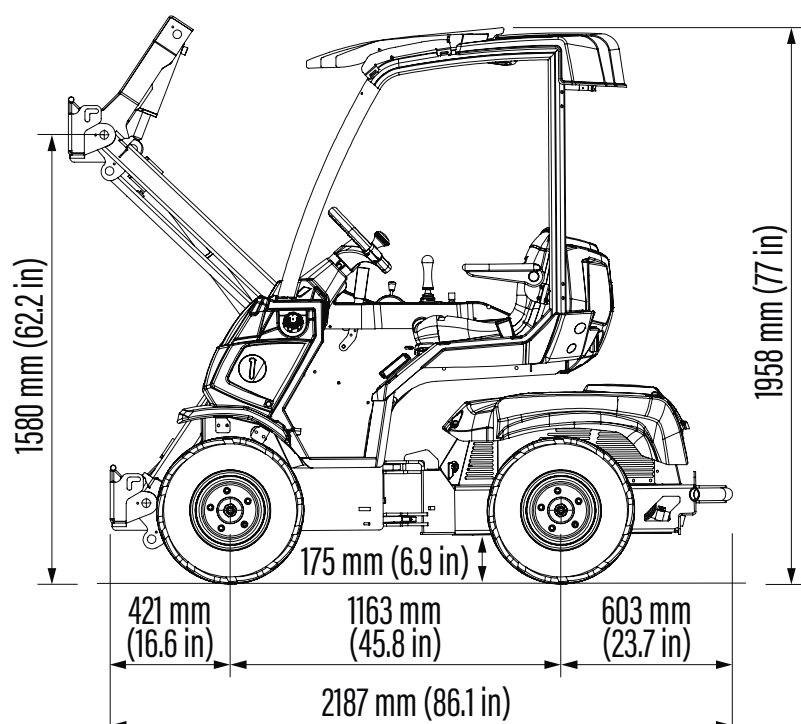

Tires size	Height	Width
20x8.00-10	1958 mm (77 in)	1047 mm (41.2 in)
23x8.50-12	1996 mm (78.6 in)	1060 mm (41.7 in)

FEATURES





- Kohler Command Pro EFI ECV749, 2 cylinder, 747 cc. petrol engine, air cooled, electric start, with electronic fuel injection (EFI)
- Stage V and EPA/CARB Phase III compliant engine
- DBS (Dynamic Block System)
- Hydraulic oil cooler
- Self-levelling H-frame boom
- Hydraulic multiconnector
- 4-functions joystick
- Hour meter, fuel gauge, engine MIL
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulically pilot operated variable displacement drive pump
- ROPS-FOPS Level I
- 2 front working light
- Ergonomic heated seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- High efficiency wheel motors

2 SERIES - OPTIONS

Options	Code
3 additional working halogen light	C883064
3 additional working LED light	C883018
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883200
Driver area cover	C880049
Flat face coupling kit	C880221
Fully enclosed cab with heating system	C885224
GPS tracker	C883075
Kohler Bluetooth diagnostic interface kit (compatible with Android or iOS diagnostic applications)	C883201
Left protection bar for operator	C885027
Mirrors	C880081
Polycarbonate back window (smart cabin)	C885239
Polycarbonate right side (smart cabin)	C885238
Polycarbonate windscreen (smart cabin)	C885237
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054
Snow chains for wheels 20x8.00-10, set of 2	C880040
Tie down bracket on wheel hub, set of 4	C883068
Torque divider	C883600
Tractor tires 23x8.50-12, set of 4	C884005
Trailer coupling	C885014
Turf profile tires 20x8.00-10, set of 4	C885211
Turf tires 23x8.50-12, set of 4	C884006
Warning & Safety lights for road travel (with mirrors)	C885240
Wheel spacer 10 mm (0,4 in), set of 4 (max. 2 pcs for wheel)	C880090
Wheel spacer 55 mm (2,2 in), set of 4 (max. 1 pcs for wheel)	C885010
ACI Upgrade	C090027



4 - 5 SERIES: 4.2 K - 5.2 K

<http://tiny.cc/4seriesEN>


(*) 5.2 K




Model	4.2 K	5.2 K
Engine	Kubota D722 - 3 cyl. - 719 cc.	Kubota D902 - 3 cyl. - 898 cc.
Emission Standard	Stage V and Tier 4 Final	
Power (Iso Gross) / Torque	20 HP / 45.8 Nm @ 2600 rpm	25 HP / 55 Nm @ 2400 rpm
Fuel	Diesel	
Transmission	Hydrostatic	
Drive speed (max.) ⁽¹⁾	14 km/h (8.7 mph)	
Aux. hydraulics oil flow	36 l/min (9.5 GPM)	
Max. lifting height	2,75 m (108 in)	
Tipping load, max. ⁽²⁾	1100 kg (2425 lbs)	1110 kg (2447 lbs)
Lifting capacity straight, max. ⁽³⁾	880 kg (1940 lbs)	890 kg (1962 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)	
Pushing force (c)	900 kgf (900 kp)	
Average ground pressure (w/standard tires)	878 kg/m ² (180 lbs/sqft)	905 kg/m ² (185 lbs/sqft)
Turning radius: inside/outside	890/1890 mm (35/74.4 in)	
Standard tires (Tractor profile)	23x8.50-12	
Weight	990 kg (2190 lbs)	1020 kg (2250 lbs)
Product Code	C944001	C977017

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

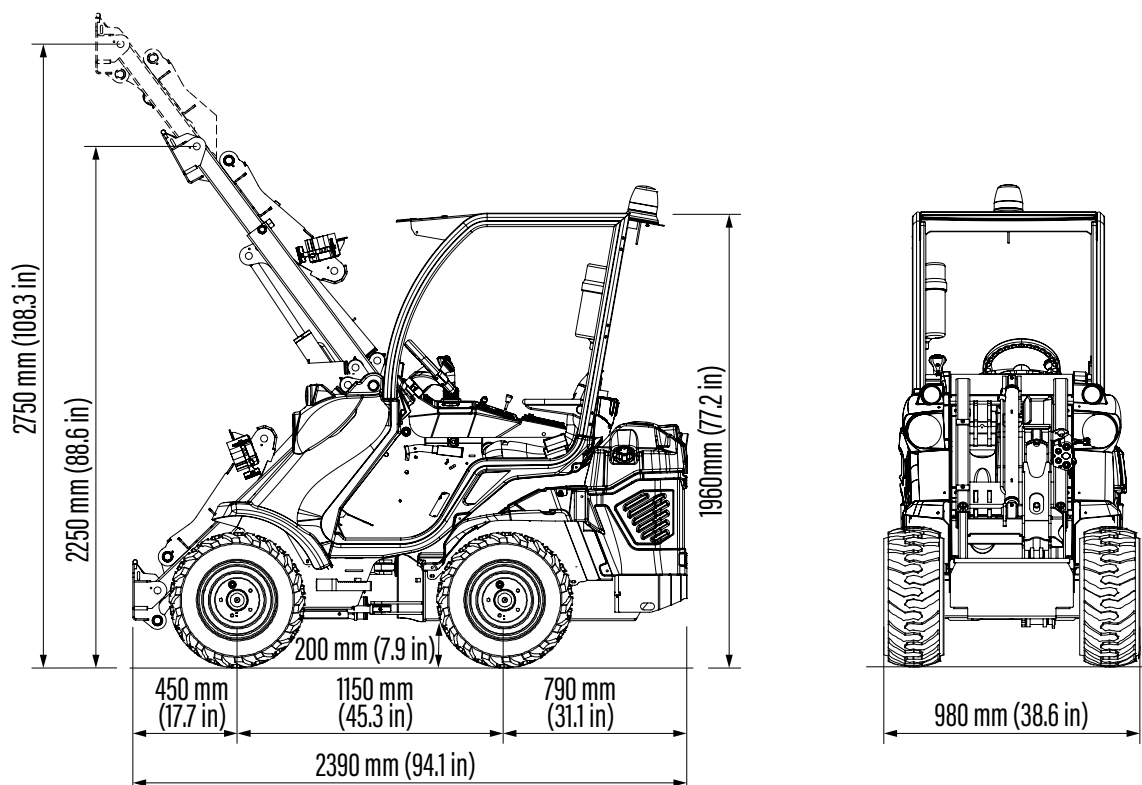

Tires size	Height	Width
23x8.50-12	1960 mm (77.2 in)	980 mm (38.6 in)
23x10.50-12 ET-25	1960 mm (77.2 in)	1090 mm (42.9 in)
27x8.50-15	2010 mm (79.1 in)	1000 mm (39.4 in)
26x12.00-12 ET-50	1998 mm (78.6 in)	1200 mm (47.2 in)

FEATURES

- Kubota D722, 3 cyl. - 719 cc. or Kubota D902, 3 cyl. - 898 cc diesel engine, water cooled, electric start, glow plug
- Stage V and Tier 4 Final compliant engine
- Unbreakable Body Panels
- Hydraulic oil cooler
- Hydraulically pilot operated variable displacement drive pump
- Hydraulic multiconnector
- Double-H telescopic boom (only for 5.2 K with self-levelling)
- 4-functions joystick
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 4WD hydrostatic Direct Drive motors, proportional servo control
- 2 front working light
- Ergonomic heated seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- High efficiency wheel motors
- Dynamic Block System (DBS) (5.2 K only)

5 SERIES: 5.3 K

<http://tiny.cc/5seriesEN>



MAX LIFTING
CAPACITY
1030
kg

ENGINE POWER
25
hp

SPEED
12,5
km/h

FLOW RATE
50
l/min

LIFT HEIGHT
2,75
m



ACI
ATTACHMENT
CONTROL
INTERFACE




Model	5.3 K
Engine	Kubota D1305, 3 cyl. - 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	12,5 km/h (7.8 mph)
Aux. hydraulics oil flow	50 l/min (13.2 GPM)
Max. lifting height	2,75 m (108 in)
Tipping load, max. ⁽²⁾	1290 kg (2844 lbs)
Lifting capacity straight, max. ⁽³⁾	1030 kg (2270 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)
Pushing force (c)	900 kgf (900 kp)
Average ground pressure (w/standard tires)	854 kg/m ² (175 lbs/sqft)
Turning radius: inside/outside	800/2000 mm (31.5/78.7 in)
Standard tires (Tractor profile)	23x10.50-12 ET-25
Weight	1070 kg (2360 lbs)
Product Code	C977038

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

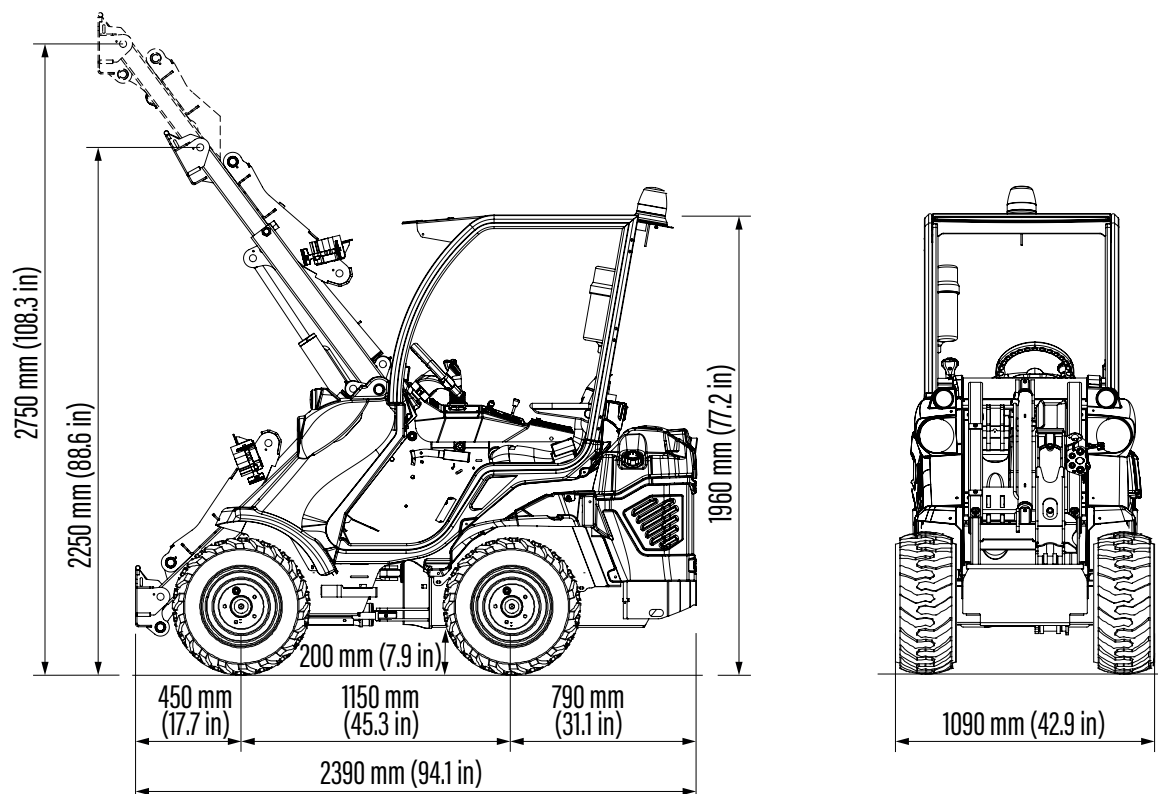

Tires size	Height	Width
23x8.50-12	1960 mm (77.2 in)	980 mm (38.6 in)
23x10.50-12 ET-25	1960 mm (77.2 in)	1090 mm (42.9 in)
27x8.50-15	2010 mm (79.1 in)	1000 mm (39.4 in)
26x12.00-12 ET-50	1998 mm (78.6 in)	1200 mm (47.2 in)

FEATURES

- Kubota D1305, 3 cyl. -1261 cc, diesel engine water cooled, electric start, glow plug
- Stage V and Tier 4 Final compliant engines
- Hi-Flow system
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- Self-levelling double-H telescopic boom
- Hydraulically pilot operated variable displacement drive pump
- Dynamic Block System (DBS)
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 4WD hydrostatic Direct Drive motors, proportional servo control
- 2 front working light
- Ergonomic heated seat with armrests and seat belt, adjustable position
- Mechanical parking brake
- High efficiency wheel motors

4 - 5 SERIES - OPTIONS


Options	Code
110 V engine block heater	C885255
220 V engine block heater	C885250
2" Hitch receiver (not compatible with C883047)	C883062
3 additional working halogen light	C883064
3 additional working LED light	C883018
Additional front hydraulic outlets (5.3 K only)	C883503
Attachment coupling plate for rear mounting (not compatible with C883047)	C880031
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883058
DBS for 4.2 K	C883402
Driver area cover	C880049
Flat face coupling kit	C880221
Floating boom valve	C885223
Floating boom valve for 4.2 K without self-leveling boom	C883401
Fully enclosed cab with sound insulation linen	C883510
GPS tracker	C883075
Heating system	C883073
Left protection bar for operator	C885026
Mirrors	C880081
Multifunction joystick (4.2 K and 5.2 K only)	C883061
Multifunction joystick with ACI (4.2 K and 5.2 K only)	C883080
Polycarbonate back window (smart cabin)	C883508
Polycarbonate right side (smart cabin)	C883507
Polycarbonate windscreen (smart cabin)	C883506
Rear 12V electric socket	C883022
Rear bull bar (not compatible with C883062, C885014 and C880031)	C883047
Rear hydraulic outlets - double	C883502
Rear hydraulic outlets - single	C883501

4 - 5 SERIES - OPTIONS

Options	Code
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883076
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054
Skid tires 27x8.50-15, set of 4	C884011
Snow chains for wheels 23x10.50-12, set of 2	C880046
Snow chains for wheels 23x8.50-12, set of 2	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Tie down bracket on wheel hub, set of 4	C883068
Torque divider	C883600
Tractor tires 23x10.50-12 ET-25, set of 4	C884007
Tractor tires 23x8.50-12, set of 4	C884005
Tractor tires 26x12.00-12 ET-50, set of 4	C884009
Trailer coupling (not compatible with C883047)	C885014
Turf tires 23x10.50-12 ET-25, set of 4	C884008
Turf tires 23x8.50-12, set of 4	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Warning & Safety lights for road travel with mirrors	C883511
Wheel spacer 10 mm (0.4 in), set of 4 (max. 2 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
ACI Upgrade (4.2 K and 5.2 K only)	C090027
EU Certificate of Conformity (CoC) for road approval (5.2 K and 5.3 K only)	COC

6 SERIES: 6.3+ K



<http://tiny.cc/6seriesEN>


**MAX LIFTING
CAPACITY**
1120
 kg


ENGINE POWER
25
 hp


SPEED
9
 km/h


FLOW RATE
50
 l/min


LIFT HEIGHT
2,92
 m


ACI
**ATTACHMENT
 CONTROL
 INTERFACE**




Model	6.3+ K
Engine	Kubota D1305 - 3 cylinder - 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	9 km/h (5.6 mph)
Aux. hydraulics oil flow	50 l/min (13.2 GPM)
Max. lifting height	2,92 m (115 in)
Tipping load, max. ⁽²⁾	1400 kg (3086 lbs)
Lifting capacity straight, max. ⁽³⁾	1120 kg (2469 lbs)
Breakout force / 50 cm	1400 kg (3086 lbs)
Pushing force (c)	1690 kgf (1690 kp)
Average ground pressure (w/standard tires)	1022 kg/m ² (209 lbs/sqft)
Turning radius: inside/outside	905/2020 mm (35.6/79.5 in)
Standard tires (Tractor profile)	23X8.50-12
Weight	1400 kg (3090 lbs)
Product Code	C961015

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

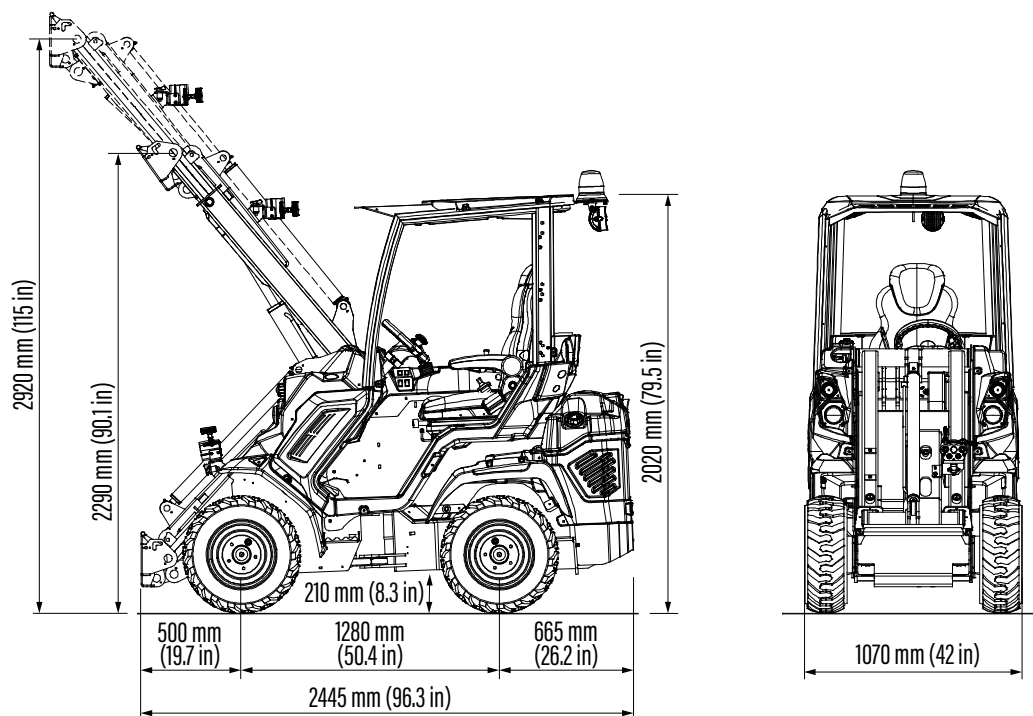

Tires size	Height	Width
23X8.50-12	2020 mm (79.5 in)	1070 mm (42 in)
23X10.50-12 ET-25	2020 mm (79.5 in)	1130 mm (44.5 in)
26X12.00-12 ET-50	2040 mm (80.3 in)	1280 mm (50.4 in)
27X8.50-15	2080 mm (81.9 in)	1070 mm (42 in)
27X10.50-15	2080 mm (81.9 in)	1150 mm (45.3 in)

FEATURES

- Kubota D1305 (25 HP), big block, 3 cylinder, diesel engine, water cooled, electric start, glow plug
- Stage V and Tier 4 Final compliant engine
- Unbreakable Body Panels
- Hi-Flow system
- DBS (Dynamic Block System)
- ACI with Multi-functions joystick (22 functions)
- Hydraulically pilot operated variable displacement drive pump
- Self-levelling double-H telescopic boom
- Self-locking multi-disk parking brake
- Hydraulic oil cooler
- Hydraulic multiconnector
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Ergonomic full adjustable suspension seated heated seat with armrests and seat belt





6 SERIES - OPTIONS

Options	Code
110 V engine block heater	C885255
220 V engine block heater	C885250
2" Hitch receiver (not compatible with C883047)	C883062
3 additional working halogen light	C883064
3 additional working LED light	C883018
Additional front hydraulic outlets	C883024
Attachment coupling plate for rear mounting (not compatible with C883047)	C880031
Automatic locking plate	C883038
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883007
Driver area cover	C880049
Flat face coupling kit	C880221
Floating boom valve	C883011
Fully enclosed cab with sound insulation linen	C883001
GPS tracker	C883075
Heating system	C883072
Left protection bar for operator	C883020
Mirrors	C880081
Polycarbonate back window (smart cabin)	C883035
Polycarbonate right side (smart cabin)	C883034
Polycarbonate windscreen (smart cabin)	C883000
Rear 12V electric socket	C883022
Rear bull bar (not compatible with C883062, C885014 and C880031)	C883047
Rear hydraulic outlets - double	C883014
Rear hydraulic outlets - single	C883013
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883078
Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)	C883079
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054

6 SERIES - OPTIONS

Options	Code
Skid tires 27x10.50-15, set of 4	C884012
Skid tires 27x8.50-15, set of 4	C884011
Snow chains for wheels 23x10.50-12, set of 2	C880046
Snow chains for wheels 23x8.50-12, set of 2	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Snow chains for wheels 27x8.50-15, set of 2	C880045
Tie down bracket on wheel hub, set of 4	C883065
Torque divider	C883600
Tractor tires 23x10.50-12 ET-25, set of 4	C884007
Tractor tires 26x12.00-12 ET-50, set of 4	C884009
Trailer coupling (not compatible with C883047)	C885014
Turf tires 23x10.50-12 ET-25, set of 4	C884008
Turf tires 23x8.50-12, set of 4	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Warning & Safety lights for road travel (with mirrors)	C883009
Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
EU Certificate of Conformity (CoC) for road approval	COC

7 SERIES: 7.2 K

<http://tiny.cc/7seriesEN>


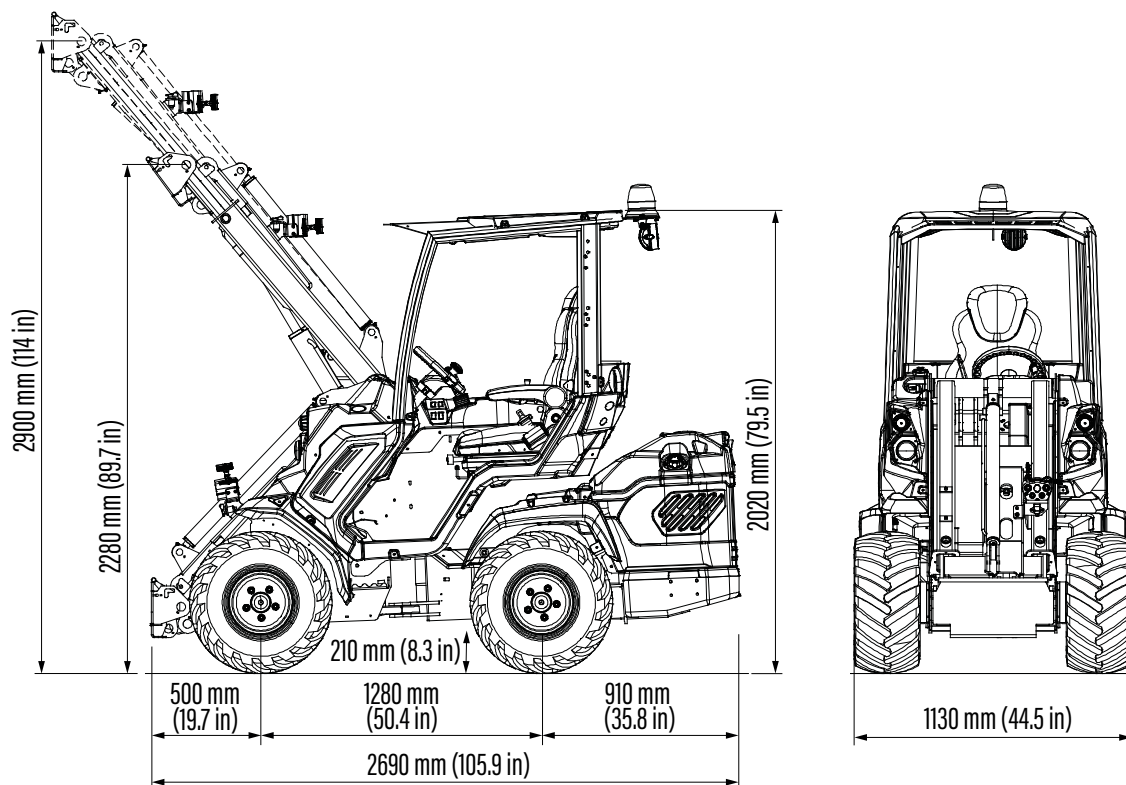
Model	7.2 K
Engine	Kubota D1305 - 3 cylinder - 1261 cc.
Emission Standard	Stage V and Tier 4 Final
Power (Iso Gross) / Torque	25 HP / 85 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	9 km/h (5.6 mph)
Aux. hydraulics oil flow	40 l/min (10.5 GPM)
Max. lifting height	2,90 m (114 in)
Tipping load, max. ⁽²⁾	1725 kg (3803 lbs)
Lifting capacity straight, max. ⁽³⁾	1380 kg (3042 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	1690 kgf (1690 kp)
Average ground pressure (w/standard tires)	1099 kg/m ² (225 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)
Standard tires (Tractor profile)	23X10.50-12 ET-25
Weight	1590 kg (3510 lbs)
Product Code	C962025

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.



Tires size	Height	Width
23X8.50-12	2020 mm (79.5 in)	1070 mm (42.2 in)
23X10.50-12 ET-25	2020 mm (79.5 in)	1130 mm (44.5 in)
26X12.00-12 ET-50	2040 mm (80.3 in)	1280 mm (50.4 in)
27X8.50-15	2080 mm (81.9 in)	1070 mm (42.1 in)
27X10.50-15	2080 mm (81.9 in)	1150 mm (45.3 in)

FEATURES

- Kubota D1305 (25 HP), big block, 3 cylinder, diesel engine, water cooled, electric start, glow plug
- Stage V and Tier 4 Final compliant engine
- Unbreakable Body Panels
- DBS (Dynamic Block System)
- Self-locking multi-disk parking brake
- Integrated rear weights
- Hydraulic oil cooler
- Hydraulic multiconnector
- Hydraulically pilot operated variable displacement drive pump
- 2 front working light
- Self-levelling double-H telescopic boom
- 4WD hydrostatic Direct Drive motors, proportional servo control
- 4-functions joystick
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- Ergonomic heated full adjustable suspension seat with armrests and seat belt
- Radial piston high efficiency and heavy duty wheel motors

7 SERIES - OPTIONS


Options	Code
110 V engine block heater	C885255
220 V engine block heater	C885250
2" Hitch receiver (not compatible with C883036)	C883062
3 additional working halogen light	C883064
3 additional working LED light	C883018
Attachment coupling plate for rear mounting	C880031
Automatic locking plate	C883038
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883007
Driver area cover	C880049
Flat face coupling kit	C880221
Floating boom valve	C883011
Fully enclosed cab with sound insulation linen	C883001
GPS tracker	C883075
Heating system	C883072
Left protection bar for operator	C883020
Mirrors	C880081
Multifunction joystick with ACI	C883080
Polycarbonate back window (smart cabin)	C883035
Polycarbonate right side (smart cabin)	C883034
Polycarbonate windscreen (smart cabin)	C883000
Rear 12V electric socket	C883022
Rear bull bar with side extensions (not compatible with C883062 and C885014)	C883036
Rear hydraulic outlets - double	C883014
Rear hydraulic outlets - single	C883013
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883069
Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)	C883077
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198 lbs + 198 lbs)	C880054

7 SERIES - OPTIONS

Options	Code
Skid tires 27x10.50-15, set of 4	C884012
Skid tires 27x8.50-15, set of 4	C884011
Snow chains for wheels 23x10.50-12, set of 2	C880046
Snow chains for wheels 23x8.50-12, set of 2	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Snow chains for wheels 27x8.50-15, set of 2	C880045
Tie down bracket on wheel hub, set of 4	C883065
Torque divider	C883600
Tractor tires 23x8.50-12, set of 4	C884005
Tractor tires 26x12.00-12 ET-50, set of 4	C884009
Trailer coupling (not compatible with C883036)	C885014
Turf tires 23x10.50-12 ET-25, set of 4	C884008
Turf tires 23x8.50-12, set of 4	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Warning & Safety lights for road travel (with mirrors)	C883009
Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
ACI Upgrade	C090027
EU Certificate of Conformity (CoC) for road approval (7.2 K)	COC

8 SERIES: 8.4S K


<http://tiny.cc/8seriesEN>




**MAX LIFTING
CAPACITY**
1470
kg



ENGINE POWER
26
hp




SPEED
22
km/h



FLOW RATE
52
l/min



LIFT HEIGHT
2,98
m



ACI
ATTACHMENT
CONTROL
INTERFACE

CRUISE
CONTROL


Model	8.4S K STAGE V
Engine	Kubota V1505 - 4 cylinder - 1498 cc
Emission Standards	Stage V - TIER 4 Final
Power (Iso Gross) / Torque	26 HP / 93 Nm @ 1700 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) ⁽¹⁾	11 - 22 km/h (6.8 - 13.6 mph)
Aux. hydraulics oil flow	52 l/min (13.7 GPM)
Max. lifting height	2,98 m (117.3 in)
Tipping load, max. ⁽²⁾	1840 kg (4056 lbs)
Lifting capacity straight, max. ⁽³⁾	1470 kg (3240 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	2050 kgf (2050 kp)
Average ground pressure (w/std tires)	1025 kg/m ² (210 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)
Standard tires (Tractor profile)	26X12.00-12 ET-50
Weight	1680 kg (3710 lbs)
Product Code	C963035

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

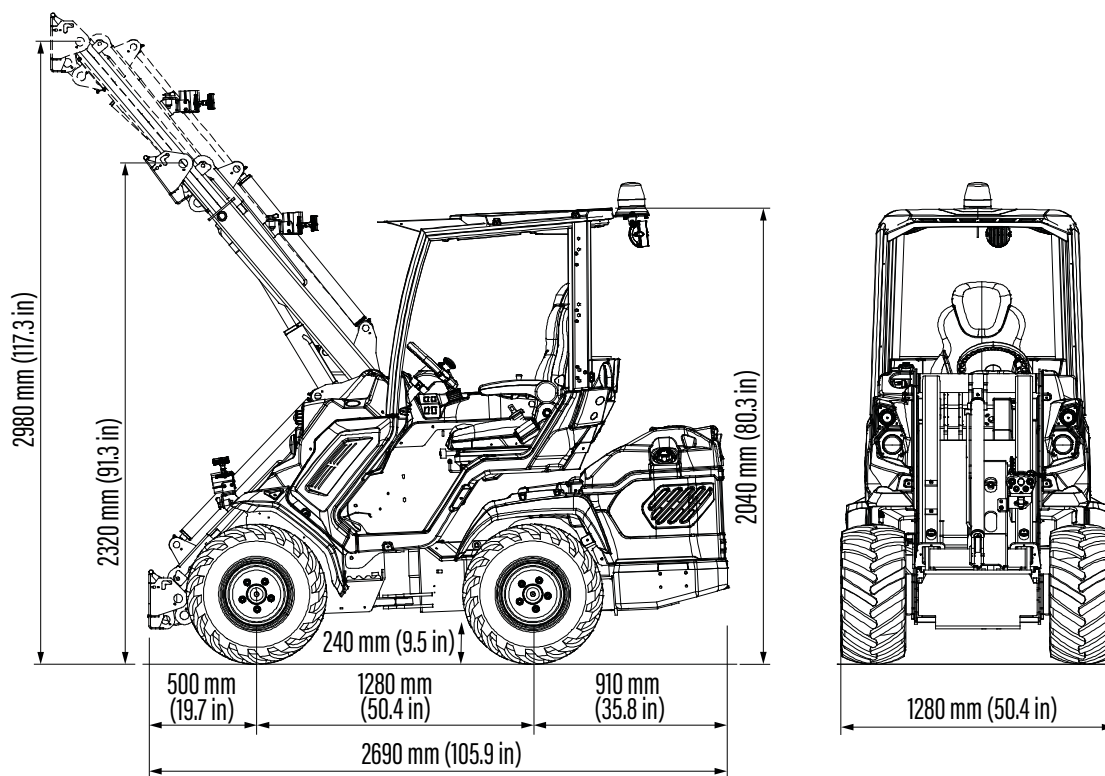


Tires size	Height	Width
23X8.50-12	2020 mm (79.5 in)	1070 mm (42.2 in)
23X10.50-12 ET-25	2020 mm (79.5 in)	1130 mm (44.5 in)
26X12.00-12 ET-50	2040 mm (80.3 in)	1280 mm (50.4 in)
27X8.50-15	2080 mm (81.9 in)	1070 mm (42.1 in)
27X10.50-15	2080 mm (81.9 in)	1150 mm (45.3 in)


FEATURES

- Kubota V1505, 4 cylinder, diesel engine, water cooled, electric start, glow plug
- Stage V and Tier 4 Final compliant engine
- **OneDrive System:** DBS (Dynamic Block System), Cruise Control and Torque Divider activated by Joystick
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- 2 Speed
- Hydraulically pilot operated variable displacement drive pump
- Self-locking multi-disk parking brake
- Hi-Flow system
- Integrated rear weights
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Ergonomic fully adjustable suspension heated seat with armrests and seat belt

8 SERIES: 8.5S K

<http://tiny.cc/8seriesEN>**NEW**


MAX LIFTING
CAPACITY
1640
kg




ENGINE POWER
57
hp



SPEED
26
km/h



FLOW RATE
83
l/min



LIFT HEIGHT
3,2
m



ACI
ATTACHMENT
CONTROL
INTERFACE

1NE
DRIVE

CRUISE
CONTROL


Model	8.5S K STAGE V
Engine	Kohler KDI 1903 - 3 cylinder 1861 cc - Turbo common rail
Emission Standards	Stage V
Power (Iso Gross) / Torque	57 HP / 225 Nm @ 1500 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) ⁽¹⁾	13 - 26 km/h (8 - 16 mph)
Aux. hydraulics oil flow	83 l/min (21.9 GPM)
Max. lifting height	3,2 m (126 in)
Tipping load, max. ⁽²⁾	2050 kg (4520 lbs)
Lifting capacity straight, max. ⁽³⁾	1640 kg (3615 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	2190 kgf (2190 kp)
Average ground pressure (w/std tires)	890 kg/m ² (182 lbs/sqft)
Turning radius: inside/outside	820/2295 mm (32.2/90.3 in)
Standard tires (Tractor profile)	400/50-15 (31x15.50-15) ET-100
Weight	1790 kg (3946 lbs)
Product Code	C964008

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

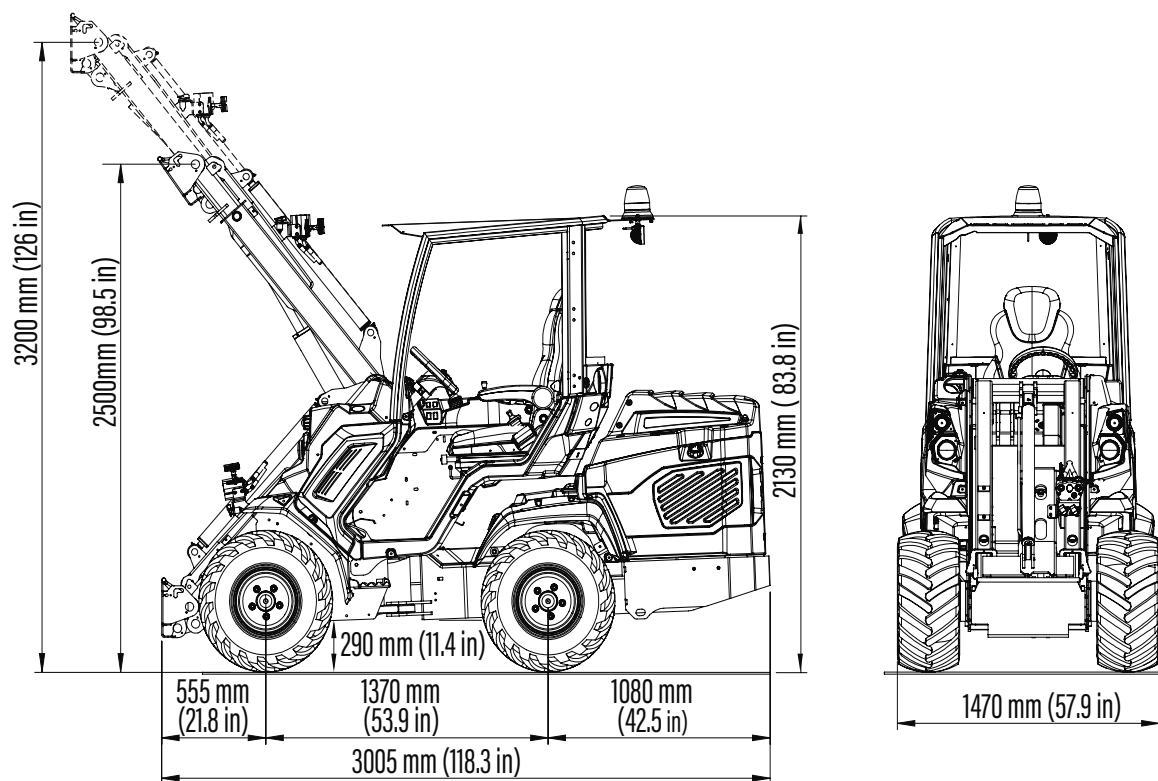

Tires size	Height	Width
26X12.00-12 ET-50	2065 mm (81.3 in)	1280 mm (50.4 in)
400/50-15 (31X15.50-15) ET-100	2130 mm (83.8 in)	1470 mm (57.9 in)

FEATURES

- Kohler KDI1903TCR, 3 cyl., Turbo common rail diesel engine, 1861 cc, water cooled with electric start
- STAGE V
- DPF
- **OneDrive System:** DBS (Dynamic Block System), Cruise Control and Torque Divider activated by Joystick
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- Hydraulically pilot operated variable displacement drive pump
- Hi-Flow system
- 2 Speed
- Self-locking multi-disk parking brake
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Fully adjustable suspension heated seat with armrests and seat belt

8 SERIES - OPTIONS

Options	Code
110 V engine block heater	C885255
220 V engine block heater	C885250
2" Hitch receiver (not compatible with C883036 and C883066)	C883062
3 additional working halogen light	C883064
3 additional working LED light	C883018
A/C system with heating for fully enclosed cab - for 8.5S K models (C883001 required - not aftermarket)	C883801
Additional front hydraulic outlets	C883024
Attachment coupling plate for rear mounting (not compatible with C883036 and C883066)	C880031
Automatic locking plate	C883038
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883007
Driver area cover	C880049
Flat face coupling kit	C880221
Floating boom valve	C883011
Fully enclosed cab with sound insulation linen	C883001
GPS tracker	C883075
Heating system for 8.4S K	C883072
Heating system for 8.5S K	C883074
Left protection bar for operator	C883020
Mirrors	C880081
OneDrive (OneDrive, DBS, Cruise Control and Torque Divider) for 8.4S K	C883810
OneDrive (OneDrive, DBS, Cruise Control and Torque Divider) for 8.5S K	C883812
Polycarbonate back window (smart cabin)	C883035
Polycarbonate right side (smart cabin)	C883034
Polycarbonate windscreen (smart cabin)	C883000
Rear 12V electric socket	C883022
Rear bull bar with side extensions (not compatible with C883062-C885014-C880031) for 8.4S K	C883036
Rear bull bar with side extensions (not compatible with C883062-C885014-C880031) for 8.5S K	C883066


8 SERIES - OPTIONS

Options	Code
Rear hydraulic outlets - double for 8.4S K	C883014
Rear hydraulic outlets - double for 8.5S K	C883805
Rear hydraulic outlets - single for 8.4S K	C883013
Rear hydraulic outlets - single for 8.5S K	C883015
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883069
Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)	C883077
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054
Skid tires 27x10.50-15, set of 4 for 8.4S K	C884012
Skid tires 27x8.50-15, set of 4 for 8.4S K	C884011
Snow chains for wheels 23x10.50-12, set of 2 for 8.4S K	C880046
Snow chains for wheels 23x8.50-12, set of 2 for 8.4S K	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Snow chains for wheels 27x8.50-15, set of 2 for 8.4S K	C880045
Tie down bracket on wheel hub, set of 4	C883065
Tractor tires 23x10.50-12 ET-25, set of 4 for 8.4S K	C884007
Tractor tires 23x8.50-12, set of 4 for 8.4S K	C884005
Tractor tires 26x12.00-12 ET-50, set of 4	C884009
Trailer coupling (not compatible with C883036 and C883066)	C885014
Turf tires 23x10.50-12 ET-25, set of 4 for 8.4S K	C884008
Turf tires 23x8.50-12, set of 4 for 8.4S K	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Turf tires 400/50-15 (31x15.50-15) ET-100, set of 4 for 8.5S K	C884014
Warning & Safety lights for road travel (with mirrors)	C883009
Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (not with 400/50-15 ET-100)	C885010
EU Certificate of Conformity (CoC) for road approval	COC

11 SERIES: 11.6 K



<http://tiny.cc/11seriesEN>**NEW****C**RUISE
CONTROL

 MAX LIFTING
CAPACITY
2540
kg


 ENGINE POWER
57
hp


 SPEED
30
km/h



 FLOW RATE
84
l/min


 LIFT HEIGHT
3,7
m
**1**NE
DRIVE**ACI**
ATTACHMENT
CONTROL
INTERFACE

Model	11.6 K STAGE V
Engine	Kohler KDI 1903 - 3 cylinder 1861 cc - Turbo common rail
Emission Standard	Stage V
Power (Iso Gross) / Torque	57 HP / 225 Nm @ 1500 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) - 2 speed ⁽¹⁾	15-30 km/h (9.3-18.6 mph)
Aux. hydraulics oil flow	84 l/min (22.2 GPM)
Max. lifting height	3,7 m (145.6 in)
Tipping load, max. ⁽²⁾	3180 kg (7010 lbs)
Lifting capacity straight, max. ⁽³⁾	2540 kg (5600 lbs)
Breakout force / 50 cm	3000 kg (6614 lbs)
Pushing force (c)	2650 kgf (2650 kp)
Average ground pressure (w/standard tires)	932 kg/m ² (192 lbs/sqft)
Turning radius: inside/outside	1135/2635 mm (44.7/ 103.7 in)
Standard tires (Tractor profile)	380/55-17
Weight	2320 kg (5115 lbs)
Product Code	C968100

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

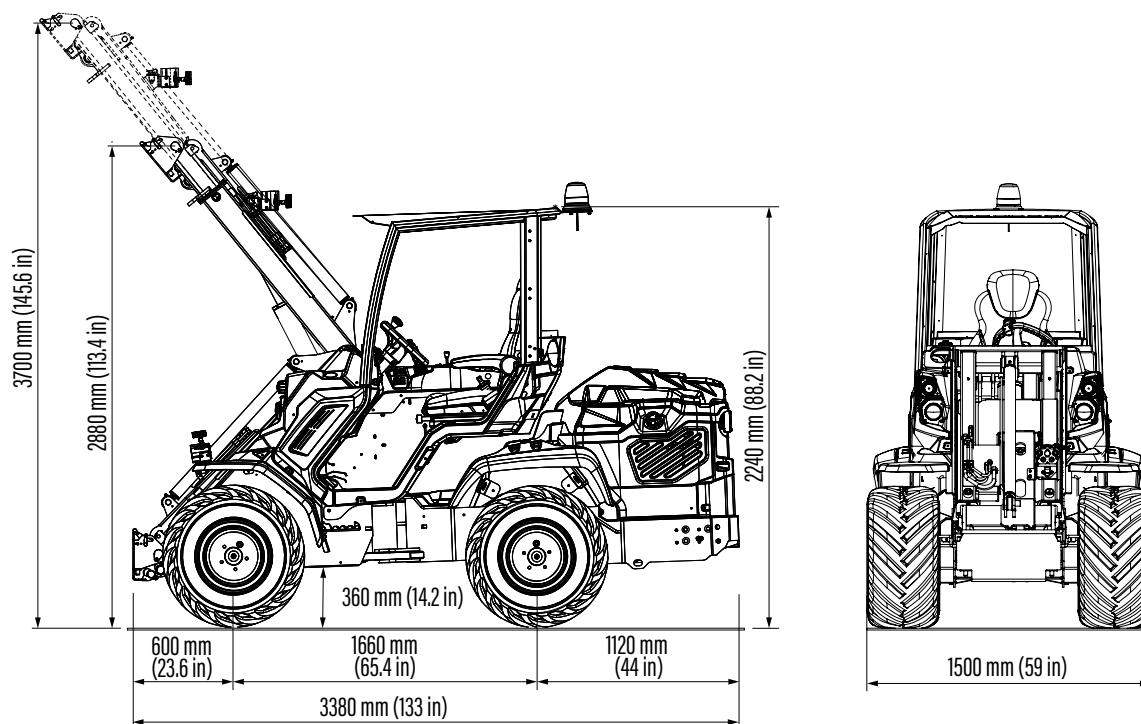






Tires size	Height	Width
380/55-17	2240 mm (88.2 in)	1500 mm (59 in)
400/50-15 (31X15.50-15)	2215 mm (87.2 in)	1500 mm (59 in)

FEATURES

- Kohler KDI1903TCR, 3 cyl., Turbo common rail, 1861 cc, diesel engine, water cooled with electric start
- STAGE V
- DPF
- **OneDrive System:** DBS (Dynamic Block System), Cruise Control and Torque Divider activated by Joystick
- ETC - Electronic Throttle Control
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- 2 Speed
- Hydraulically pilot operated variable displacement drive pump
- Hi-Flow system
- Self-locking multi-disk parking brake
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Fully adjustable suspension heated seat with armrests and seat belt

11 SERIES: 11.9 K

<http://tiny.cc/11seriesEN>**NEW****C**RUISE
CONTROL


 MAX LIFTING CAPACITY	 ENGINE POWER	 SPEED	 FLOW RATE	 LIFT HEIGHT
2620 kg	75 hp	35 km/h	95 l/min	3,7 m

**1**NE
DRIVE**ACI**
ATTACHMENT
CONTROL
INTERFACE

Model	11.9 K STAGE V
Engine	Kohler KDI 2504 - 4 cylinder - 2482 cc
Emission Standard	Stage V
Power (Iso Gross) / Torque	75 HP / 300 Nm @ 1500 rpm
Fuel	Diesel
Transmission	Hydrostatic OneDrive
Drive speed (max.) - 2 speed ⁽¹⁾	17 - 35 km/h (10.5 - 21.5 mph)
Aux. hydraulics oil flow	95 l/min (25 GPM)
Max. lifting height	3,7 m (145.6 in)
Tipping load, max. ⁽²⁾	3280 kg (7231 lbs)
Lifting capacity straight, max. ⁽³⁾	2620 kg (5776 lbs)
Breakout force / 50 cm	3150 kg (6945 lbs)
Pushing force (c)	2650 kgf (2650 kp)
Average ground pressure (w/standard tires)	964 kg/m ² (197 lbs/sqft)
Turning radius: inside/outside	1135/2635 mm (44.7/ 103.7 in)
Standard tires (Tractor profile)	380/55-17
Weight	2400 kg (5291 lbs)
Product Code	C968200

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

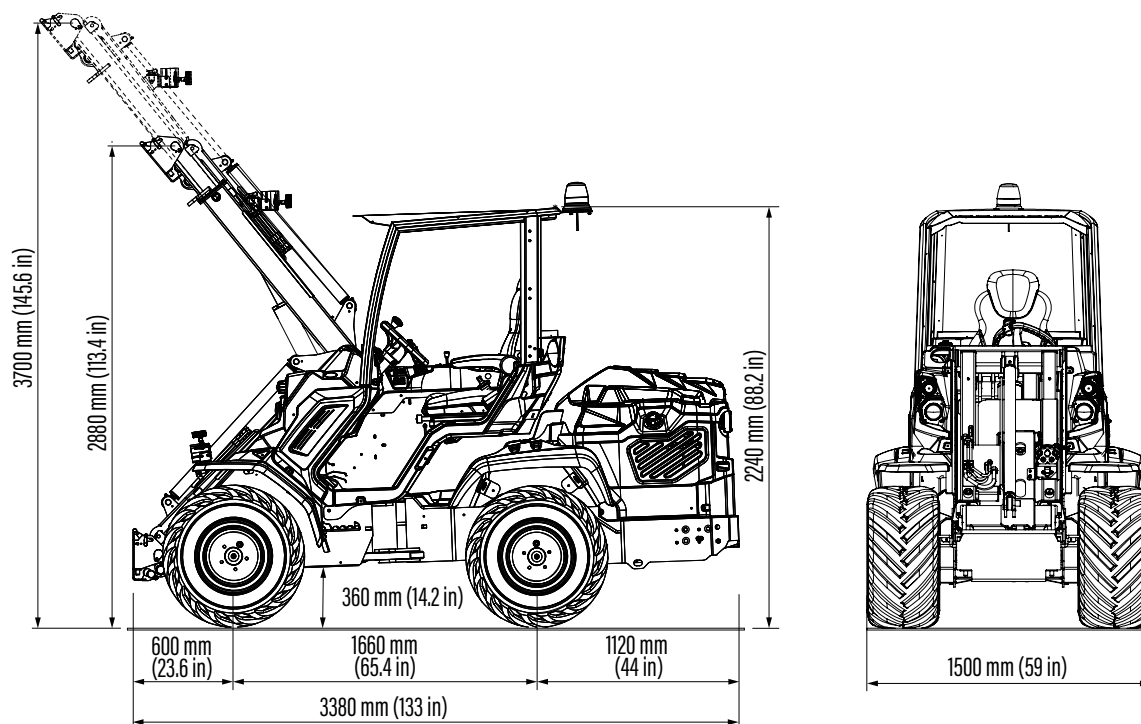

Tires size	Height	Width
380/55-17	2240 mm (88.2 in)	1500 mm (59 in)
400/50-15 (31X15.50-15)	2215 mm (87.2 in)	1500 mm (59 in)

FEATURES

- Kohler KDI2504, 4 cyl., Turbo common rail diesel engine, 2482 cc, water cooled with electric start
- STAGE V
- DPF
- **OneDrive System:** DBS (Dynamic Block System), Cruise Control and Torque Divider activated by Joystick
- ETC - Electronic Throttle Control
- ACI with Multi-functions joystick (22 functions)
- Unbreakable Body Panels
- 2 Speed
- Hydraulically pilot operated variable displacement drive pump
- Hi-Flow system
- Self-locking multi-disk parking brake
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working light
- Fully adjustable suspension heated seat with armrests and seat belt

11 SERIES - OPTIONS

Options	Code
110 V engine block heater	C885255
220 V engine block heater	C885250
2" Hitch receiver (not compatible with C883047)	C883063
3 additional working halogen light	C883064
3 additional working LED light	C883018
A/C system with heating for fully enclosed cab (C883001 required - not aftermarket)	C883902
Additional front hydraulic outlets	C883082
Attachment coupling plate for rear mounting (not compatible with C883037)	C880031
Automatic locking plate	C883008
Backup warning beeper	C883021
Beacon light	C883039
Biodegradable oil	C883032
Driver area cover	C880049
Flat face coupling kit	C880221
Floating boom valve	C883011
Fully enclosed cab with sound insulation linen	C883001
GPS tracker	C883075
Heating system	C883074
Left protection bar for operator	C883020
Mirrors	C880081
OneDrive (OneDrive, DBS, Cruise Control and Torque Divider)	C883811
Polycarbonate back window (smart cabin)	C883035
Polycarbonate right side (smart cabin)	C883034
Polycarbonate windscreen (smart cabin)	C883000
Rear 12V electric socket	C883023
Rear bull bar with side extensions (not compatible with C883063 and C885014)	C883037
Rear hydraulic outlets - double	C883016
Rear hydraulic outlets - single	C883015
Rear weights (440 kg / 970 lbs)	C885025


11 SERIES - OPTIONS

Options	Code
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883069
Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)	C883077
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054
Rubber tracks for 11 series (The kit weights 750 kg / 1655 lbs and increases the height of the machine by 1,5 cm / 0,6 in)	C883107
Snow chains for wheels, 400/50-15 (31x15.50-15), set of 2	C880044
Tie down bracket on wheel hub, set of 4	C883065
Tractor tires 400/50-15 (31x15.50-15), set of 4	C884016
Trailer coupling (not compatible with C883047)	C885017
Turf tires 400/50-15 (31x15.50-15), set of 4	C884013
Turf tires 380/55-17, set of 4	C884017
Warning & Safety lights for road travel (with mirrors)	C883010
Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
EU Certificate of Conformity (CoC) for road approval	COC

EZ SERIES: EZ5

<http://tiny.cc/EZ5seriesEN>**NEW**



MAX LIFTING
CAPACITY
890
kg




BATTERY CAPACITY
10,8
kWh



SPEED
12
km/h



FLOW RATE
35
l/min



LIFT HEIGHT
2,75
m




Li ION
BATTERY



Model	EZ 5
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	12 km/h (7.5 mph)
Aux. hydraulics oil flow	35 l/min (9.3 GPM)
Max. lifting height	2,75 m (108 in)
Tipping load, max. ⁽²⁾	1110 kg (2447 lbs)
Lifting capacity straight, max. ⁽³⁾	890 kg (1962 lbs)
Breakout force / 50 cm	800 kg (1764 lbs)
Pushing force (c)	900 kgf (900 kp)
Average ground pressure (w/standard tires)	814 kg/m ² (167 lbs/sqft)
Turning radius: inside/outside	800/2000 mm (31.5/78.7 in)
Standard tires (Tractor profile)	23x10.50-12 ET-25
Weight	1020 kg (2250 lbs)
Product Code (Standard)	C977060
EZ5 Pack 1 (ACI with Muti-functions joystick)	C977061

Electric system and battery

Battery type	LiFePO4
Battery capacity	10,8 kWh
Electric motors	2
Charging system	Integrated charger
Charger type	Sealed single-phase
Charger Input Voltage	110 - 230 ± 10% VAC
Charger Input Frequency	50 ÷ 60 Hz
Charger Absorbed Current	Max. 14 A
Charging Current (230 VAC)	Max. 60 A
Charging Current (120 VAC)	Max. 30 A
Charger plug type	Schuko, CEE 7/7
Charger Protection	Output short-circuit, Inverse polarity

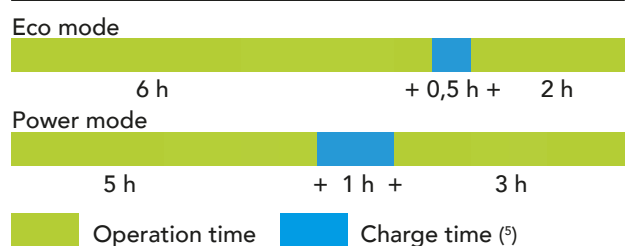Daily work cycle in hours ⁽⁴⁾

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.


⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

⁽⁴⁾ The operation time of machine varies highly depending on the type of work it is performing.

⁽⁵⁾ With MultiOne Fast Charging Station.

Note: Refer to the Operator's manual for the comprehensive load diagram.

MULTI ONE

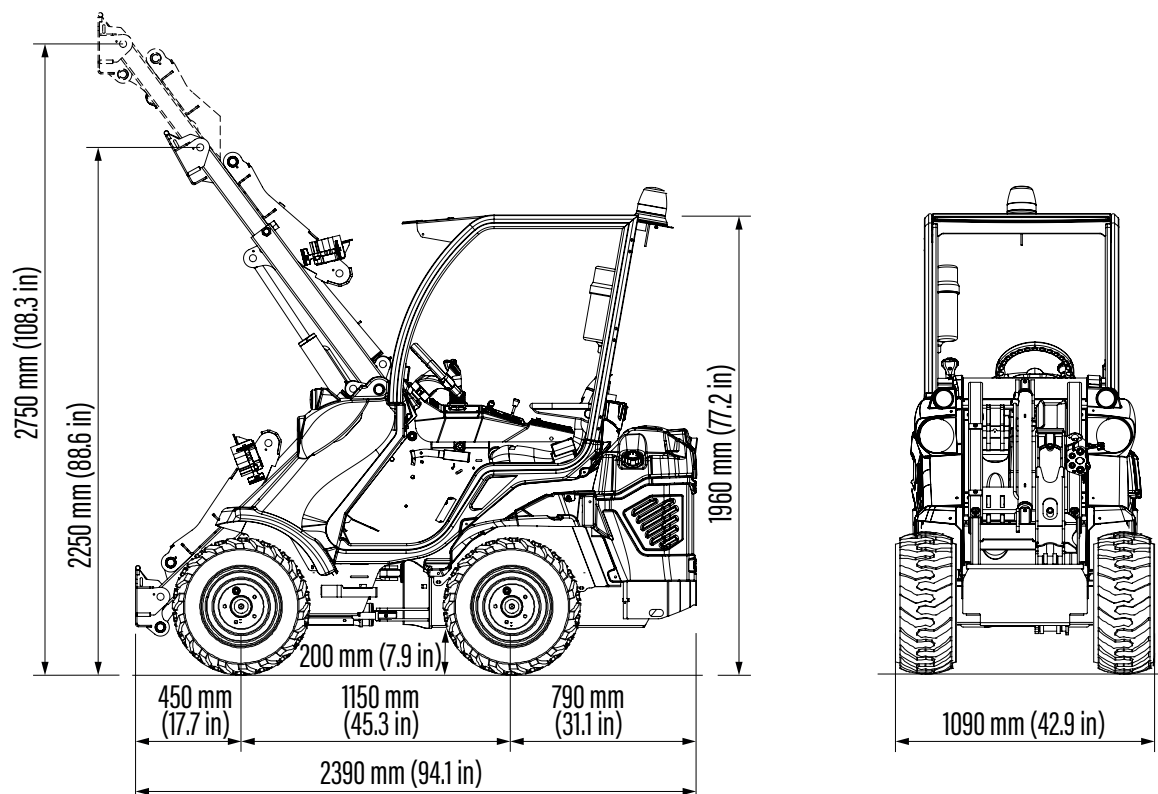

Tires size	Height	Width
23x8.50-12	1960 mm (77.2 in)	980 mm (38.6 in)
23x10.50-12 ET-25	1960 mm (77.2 in)	1090 mm (42.9 in)
27x8.50-15	2010 mm (79.1 in)	1000 mm (39.4 in)
26x12.00-12 ET-50	1998 mm (78.6 in)	1200 mm (47.2 in)

FEATURES

- Twin Motors Single Ended Circuits
- LI-ION Battery
- Integrated Smart Battery Charger
- Zero Emission
- Low Noise
- Braking Energy Recovery System
- Unbreakable Body Panels
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- ACI with Multi-functions joystick (22 functions) on Pack 1
- Mechanical parking brake
- LCD graphic display with programmed service
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and seat belt
- High efficiency wheel motors
- Hydraulic multiconnector
- ROPS-FOPS Level I

EZ 5 - OPTIONS

Options	Code
2" Hitch receiver (not compatible with C883047)	C883062
Attachment coupling plate for rear mounting (not compatible with C883047)	C880031
Beacon light	C883039
Biodegradable oil	C883058
Driver area cover	C880049
Fast charging station 95A	C883809
Fast charging station 160A	C883808
Flat face coupling kit	C880221
Floating boom valve	C885223
GPS tracker	C883075
Left protection bar for operator	C885026
Mirrors	C880081
Polycarbonate back window (smart cabin)	C883508
Polycarbonate right side (smart cabin)	C883507
Polycarbonate windscreen (smart cabin)	C883506
Rear bull bar (not compatible with C883062, C885014 and C880031)	C883047
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883076
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198 lbs + 198 lbs)	C880054
Skid tires 27x8.50-15, set of 4	C884011
Snow chains for wheels 23x10.50-12, set of 2	C880046
Snow chains for wheels 23x8.50-12, set of 2	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Tie down bracket on wheel hub, set of 4	C883068
Tractor tires 23x10.50-12 ET-25, set of 4	C884007


EZ 5 - OPTIONS

Options	Code
Tractor tires 23x8.50-12, set of 4	C884005
Tractor tires 26x12.00-12 ET-50, set of 4	C884009
Trailer coupling (not compatible with C883047)	C885014
Turf tires 23x10.50-12 ET-25, set of 4	C884008
Turf tires 23x8.50-12, set of 4	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Wheel spacer 10 mm (0.4 in), set of 4 (max. 2 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
ACI upgrade	C090027


EZ SERIES: EZ7

<http://tiny.cc/EZ7seriesEN>



MAX LIFTING
CAPACITY
1650
kg




BATTERY CAPACITY
16,5
kWh




SPEED
12
km/h



FLOW RATE
35
l/min



LIFT HEIGHT
2,9
m



Model	EZ 7
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	12 km/h (7.5 mph)
Aux. hydraulics oil flow	35 l/min (9.3 GPM)
Max. lifting height	2,90 m (114 in)
Tipping load, max. ⁽²⁾	2070 kg (4563 lbs)
Lifting capacity straight, max. ⁽³⁾	1650 kg (3637 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	2050 kgf (2050 kp)
Average ground pressure (w/standard tires)	1135 kg/m ² (232 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)
Standard tires (Tractor profile)	26X12.00-12 ET-50
Weight	1860 kg (4110 lbs)
Product Code	C962020
EZ7 Pack 1 (ACI with Muti-functions joystick)	C962021

Electric system and battery

Battery type	Lead Acid
Battery capacity	16,5 kWh
Electric motors	2
Charging system	Integrated charger
Charger type	Sealed single-phase
Charger Input Voltage	110 - 230 ± 10% VAC
Charger Input Frequency	50 ÷ 60 Hz
Charger Absorbed Current	Max. 14 A
Charging Current (230 VAC)	Max. 60 A
Charging Current (120 VAC)	Max. 30 A
Charger plug type	Schuko, CEE 7/7
Charger Protection	Output short-circuit, Inverse polarity

Daily work cycle in hours ⁽⁴⁾

Eco mode

5 h

Power mode

4 h

Operation time


⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

⁽⁴⁾ The operation time of machine varies highly depending on the type of work it is performing.

Note: Refer to the Operator's manual for the comprehensive load diagram.

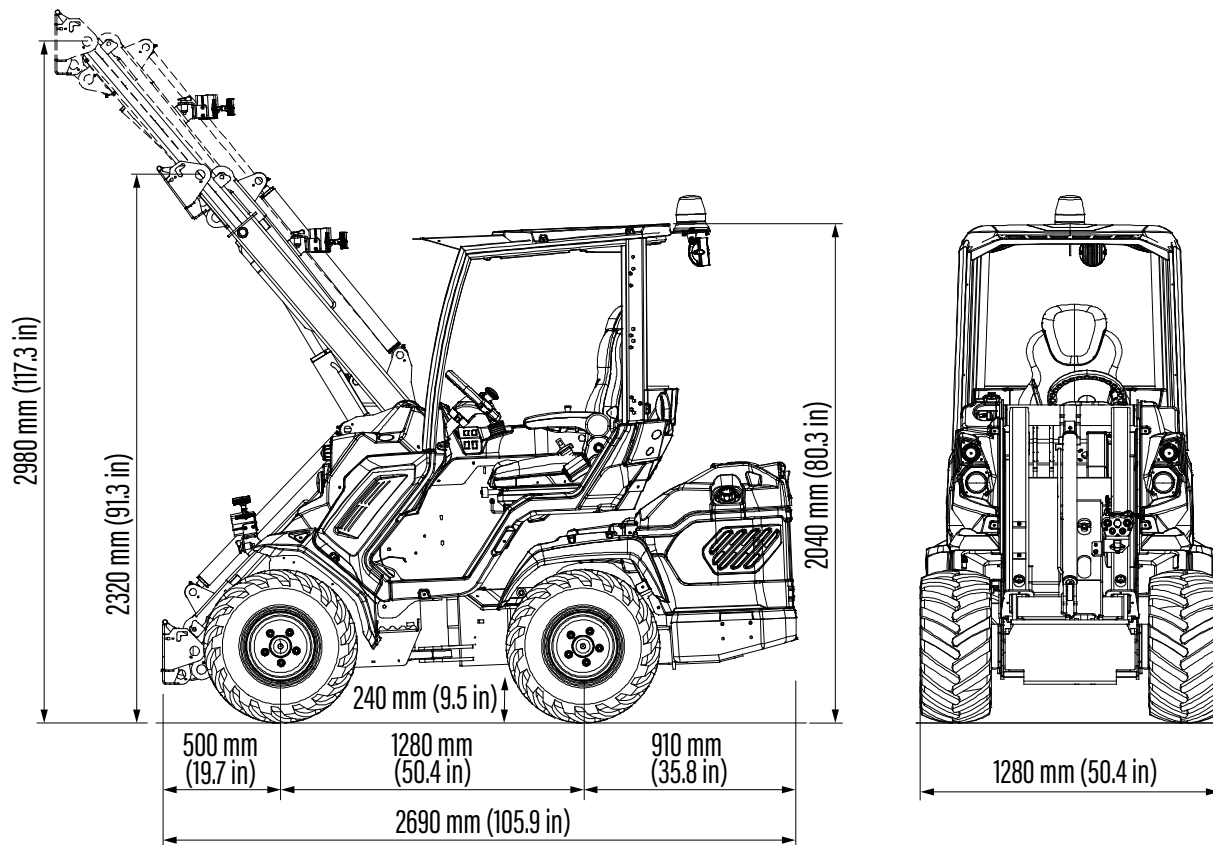

Tires size	Height	Width
23X8.50-12	2020 mm (79.5 in)	1070 mm (42.2 in)
23X10.50-12 ET-25	2020 mm (79.5 in)	1130 mm (44.5 in)
26X12.00-12 ET-50	2040 mm (80.3 in)	1280 mm (50.4 in)
27X8.50-15	2080 mm (81.9 in)	1070 mm (42.1 in)
27X10.50-15	2080 mm (81.9 in)	1150 mm (45.3 in)


FEATURES

- Twin Motors Single Ended Circuits
- Lead Acid Battery
- Integrated Smart Battery Charger
- Zero Emission
- Low Noise
- Braking Energy Recovery System
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- ACI with Multi-functions joystick (22 functions) on Pack 1
- Self-locking multi-disk parking brake
- LCD graphic display with programmed service
- 2 front led working light
- Ergonomic full adjustable suspension seat with armrests and seat belt
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic multiconnector
- ROPS-FOPS Level I


EZ SERIES: EZ8

<http://tiny.cc/EZ8seriesEN>



MAX LIFTING
CAPACITY
1420
kg




BATTERY CAPACITY
21,5
kWh




SPEED
12
km/h




FLOW RATE
35
l/min



LIFT HEIGHT
2,9
m




Li ION
BATTERY



Model	EZ 8
Transmission	Hydrostatic
Drive speed (max.) ⁽¹⁾	12 km/h (7.5 mph)
Aux. hydraulics oil flow	35 l/min (9.3 GPM)
Max. lifting height	2,90 m (114 in)
Tipping load, max. ⁽²⁾	1780 kg (3924 lbs)
Lifting capacity straight, max. ⁽³⁾	1420 kg (3130 lbs)
Breakout force / 50 cm	1700 kg (3748 lbs)
Pushing force (c)	2050 kgf (2050 kp)
Average ground pressure (w/standard tires)	958 kg/m ² (196 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)
Standard tires (Tractor profile)	26X12.00-12 ET-50
Weight	1570 kg (3470 lbs)
Product Code	C963021
EZ8 Pack 1 (ACI with Muti-functions joystick)	C963022

Electric system and battery

Battery type	Lithium-ion
Battery capacity	21,5 kWh
Electric motors	2
Charging system	Integrated charger
Charger type	Sealed single-phase
Charger Input Voltage	110 - 230 ± 10% VAC
Charger Input Frequency	50 ÷ 60 Hz
Charger Absorbed Current	Max. 14 A
Charging Current (230 VAC)	Max. 60 A
Charging Current (120 VAC)	Max. 30 A
Charger plug type	Schuko, CEE 7/7
Charger Protection	Output short-circuit, Inverse polarity

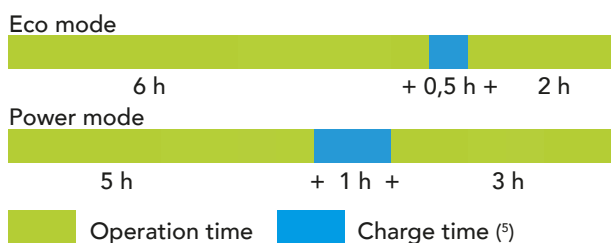Daily work cycle in hours ⁽⁴⁾

⁽¹⁾ Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

⁽²⁾ Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.


⁽³⁾ Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

⁽⁴⁾ The operation time of machine varies highly depending on the type of work it is performing.

⁽⁵⁾ With MultiOne Fast Charging Station.

Note: Refer to the Operator's manual for the comprehensive load diagram.

MULTI¹ONE

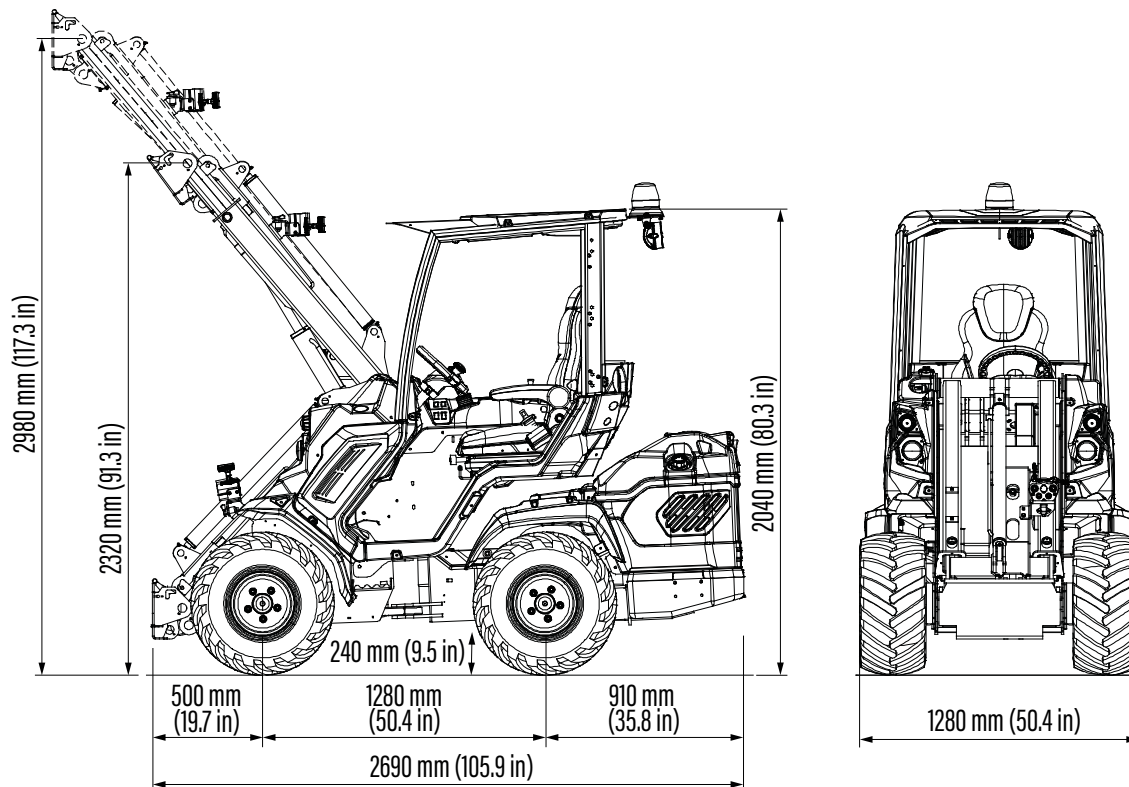

Tires size	Height	Width
23X8.50-12	2020 mm (79.5 in)	1070 mm (42.2 in)
23X10.50-12 ET-25	2020 mm (79.5 in)	1130 mm (44.5 in)
26X12.00-12 ET-50	2040 mm (80.3 in)	1280 mm (50.4 in)
27X8.50-15	2080 mm (81.9 in)	1070 mm (42.1 in)
27X10.50-15	2080 mm (81.9 in)	1150 mm (45.3 in)

FEATURES

- Twin Motors Single Ended Circuits
- LI-ION Battery
- Integrated Smart Battery Charger
- External fast charging station available
- Zero Emission
- Low Noise
- Braking Energy Recovery System
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- ACI with Multi-functions joystick (22 functions) on Pack 1
- Self-locking multi-disk parking brake
- LCD graphic display with programmed service
- 2 front led working light
- Ergonomic full adjustable suspension seat with armrests and seat belt
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic multiconnector
- ROPS-FOPS Level I

EZ 5 / EZ 8 - FAST CHARGING STATION




QUICK CHARGE

HIGH EFFICIENCY
SAVE ENERGY


BATTERY CARE



FLEXIBILITY

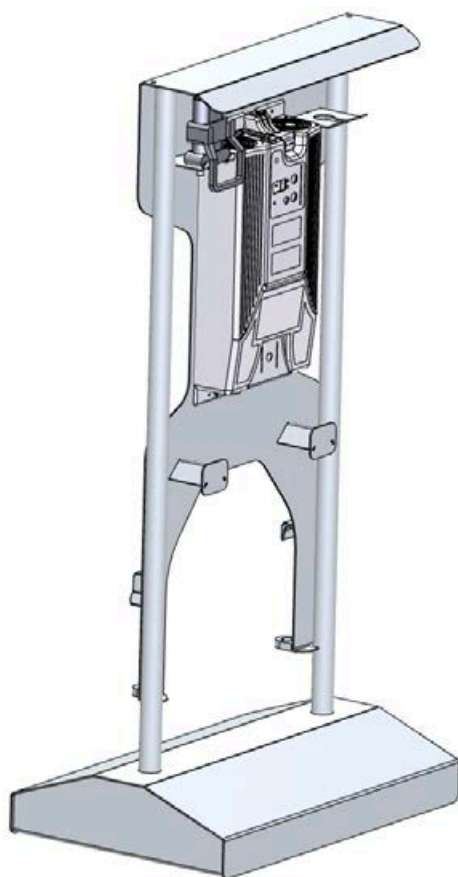

Models	95A	160A
Input Voltage	400 V \pm 15 % - 50/60 Hz	
Nom. Phase Current	9 A	13 A
AC Plug	CEE 16A 400V 3P+T	
Battery Cable (mm ² /in ²)	25 / 0.04	35 / 0.06
Output Voltage	48V	
Output Current	95 A	160 A
Weight	50 kg (110 lbs)	
Product Code	C883809	C883808

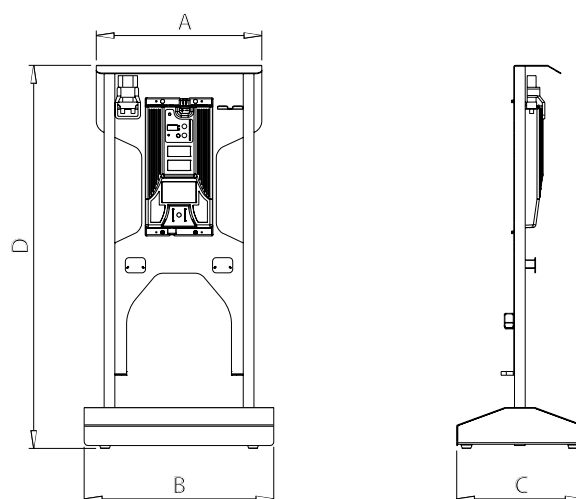

Dimensions				
	A	B	C	D
cm	65,5	75	50	151,5
in	25.5	29.5	19.5	60

FEATURES

- Suitable for EZ 5 and EZ 8
- Quick charge. 1 hour charging:
 - EZ 5 - 60% charge (with 95A Fast Charging Station)
 - EZ 8 - 50% charge (with 160A Fast Charging Station)
- CAN bus communication for lithium will ensure efficient and fast charging
- Peak Efficiency: 93%
- LCD display
- Forced air-cooling
- MultiOne coupling plate

EZ 7 / EZ8 - OPTIONS

Options	Code
2" Hitch receiver (not compatible with C883036)	C883062
Automatic coupling plate	C883038
Attachment coupling plate for rear mounting (not compatible with C883036)	C880031
Beacon light	C883039
Biodegradable oil	C883007
Driver area cover	C880049
Fast charging station 160A (EZ8 only)	C883808
Fast charging station 95A (EZ8 only)	C883809
Flat face coupling kit	C880221
Floating boom valve	C883011
GPS tracker	C883075
Left protection bar for operator	C883020
Mirrors	C880081
Multifunction joystick with ACI	C883080
Polycarbonate back window (smart cabin)	C883035
Polycarbonate right side (smart cabin)	C883034
Polycarbonate windscreen (smart cabin)	C883000
Rear bull bar with side extensions (not compatible with C883062, C885014 and C880031)	C883036
Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)	C883069
Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)	C883077
Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)	C880054
Skid tires 27x10.50-15, set of 4	C884012
Skid tires 27x8.50-15, set of 4	C884011
Snow chains for wheels 23x10.50-12, set of 2	C880046
Snow chains for wheels 23x8.50-12, set of 2	C880041
Snow chains for wheels 26x12.00-12, set of 2	C880042
Snow chains for wheels 27x8.50-15, set of 2	C880045
Tie down bracket on wheel hub, set of 4	C883065
Tractor tires 23x10.50-12 ET-25, set of 4	C884007

EZ 7 / EZ8 - OPTIONS

Options	Code
Tractor tires 23x8.50-12, set of 4	C884005
Trailer coupling (not compatible with C883036)	C885014
Turf tires 23x10.50-12 ET-25, set of 4	C884008
Turf tires 23x8.50-12, set of 4	C884006
Turf tires 26x12.00-12 ET-50, set of 4	C884010
Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel)	C880090
Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel)	C885010
ACI Upgrade	C090027

WHEELS



TRACTOR



SKID



TURF

Code	Size	Profile	Compatibility											
			1.1	2.3 EFI	4.2 K	5.2 K	5.3 K	6.3+ K	7.2 K	EZ 5	EZ 7 - EZ 8	8.45 K	8.5 K	11.6 K - 11.9 K
C040034	18x9.50-8	Tractor	S											
C040035	18x9.50-8	Turf	C											
C040060	20x8.00-10	Tractor		S										
C040061	20x8.00-10	Turf		C										
C040049	23x8.50-12	Turf		C	C	C	C	C	C	C	C	C		
C040050	23x8.50-12	Tractor		C	S	S	C	S	C	C	C	C		
C040075	23x10.50-12 ET-25	Tractor			C	C	S	C	S	S	C	C		
C040076	23x10.50-12 ET-25	Turf			C	C	C	C	C	C	C	C		
C040056	26x12.00-12 ET-50	Tractor			C	C	C	C	C	C	S	S	C	
C040057	26x12.00-12 ET-50	Turf			C	C	C	C	C	C	C	C	C	
C040070	27x8.50-15	Skid			C	C	C	C	C	C	C	C		
C040072	27x10.50-15	Skid						C	C		C	C		
C040085	400/50-15 (31x15.50-15)	Turf												C
C040002	400/50-15 (31x15.50-15)	Tractor												C
C040036	400 / 50-15 ET-100 (31x15.50-15 ET-100)	Tractor											S	
C040087	400 / 50-15 ET-100 (31x15.50-15 ET-100)	Turf											C	
C040079	380/55-17	Tractor												S
C040095	380/55-17	Turf												C

S = standard ; C = compatible

OPTIONS

Standard Optional Not available



TELESCOPIC BOOM

Telescopic boom with double H frame for extra strength. It allows reaching considerable load heights, ensuring an excellent visibility of the load at any time.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



SELF-LEVELLING

This is an ideal device for lifting heavy loads safely. It is installed on the machine boom and keeps the load level, without the need to continuously correct the position with the joystick.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

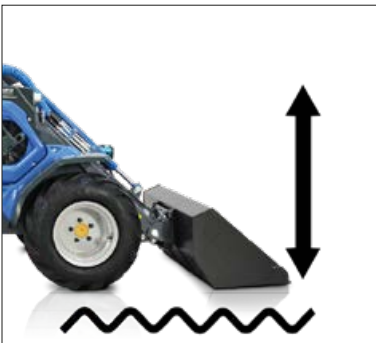

FLOATING BOOM VALVE

It allows the mounted attachments to follow the contours of the land perfectly. Ideal for applications in agriculture and in the care of the green areas. Note: Self-leveling is disabled when the boom floating is turned on.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



FULLY ENCLOSED CAB WITH SOUND INSULATION LINEN

With weatherproof blue tinted glass, is the optimal solution for driver protection from cold, wet, wind and winter. The large door enables ease of access, whilst the side glass is hinged to open for ventilation. It's standard equipped with wiper. Heating system is suggested (come standard on 2 series cab).

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



"SMART" CABIN

The most competitive solution for the operator who wants to improve working conditions thanks to a light cabin which limits the discomfort created by weathering.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



HEATING

Heating with adjustable air flows and temperature.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



HEATED SEAT

Ergonomic heated seat with armrests, seat belt. Ideal for cold climates, it significantly increases the comfort of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



UNBREAKABLE BODY PANELS

The resistance and flexibility of the compound used let the panel absorb shocks, deforms and go back to original shape.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



AIR CONDITIONING SYSTEM WITH HEATING FOR CAB

Air conditioning system from the roof of the cabin, with adjustable fan speed and electronic temperature control. Wide air outlets create a very comfortable ventilation system inside the cabin.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8.4S K	8.5	11 Series	EZ Series



LEFT PROTECTION BAR FOR OPERATOR

It is placed on the left side of the machine to protect the operator from falling out of the vehicle. It can be locked and unlocked very quickly thanks to a special mechanism.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

OPTIONS

Standard Optional Not available



WARNING AND SAFETY LIGHTS FOR ROAD TRAVEL (W/ MIRRORS)

Front and rear lights, brake lights, turning lights, beacon, mirrors. In certain countries this equipment enables road traffic registration – requirements vary in different countries, please consult your local MultiOne distributor.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional



TRAILER COUPLING / 2" HITCH RECEIVER

Two type of trailer coupling: A) rear tow hook with double connection: with tow ball (car type) and tow pin (agricultural type). B) 2" Hitch receiver. Not compatible with 2.3 EFI. Can be used also with rear weights.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional



REAR WEIGHTS 220 KG + 220 KG (485 LBS + 485 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Not available	Not available	Not available	Not available	Not available	Not available	Optional	Not available



REAR WEIGHTS 90 KG + 90 KG (198 LBS + 198 LBS)

Rear weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional



REAR SIDE WEIGHTS 40 KG + 40 KG (88 LBS + 88 LBS)

Rear side weights are used to increase the lifting capacity of the machine. It's possible to mount them also with other rear weights mounted. Two kit (80 kg per side, 160 kg total) can be mounted.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Not available	Optional	Optional	Optional	Optional	Optional	Optional	Optional

OPTIONS

■ Standard
 ■ Optional
 ■ Not available



DYNAMIC BLOCK SYSTEM

The DBS diverts oil flow between the left & right side hydraulic wheel motors: the hydraulic oil flows in parallel between the hydraulic wheel motors on each side operating similar to a differential lock.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



TORQUE DIVIDER

It evenly distributes hydraulic oil between the front right and front left side hydraulic motors, improving traction on slippery and uneven surfaces.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



HYDRAULIC MULTICONNECTOR

It is a innovative coupling system for front attachments that allow the connection of the hydraulic lines in a few seconds without stress.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



BIODEGRADABLE OIL

A eco-friendly choice. This oil do not produce a lasting oily residue on water and do not impact plant and animal life. It can be trusted in all environmentally sensitive areas.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series




REAR HYDRAULIC OUTLETS

They are used to mount on the rear side attachments that need hydraulic supply. The rear outlets are controlled by the control panel.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

OPTIONS

■ Standard
 ■ Optional
 ■ Not available

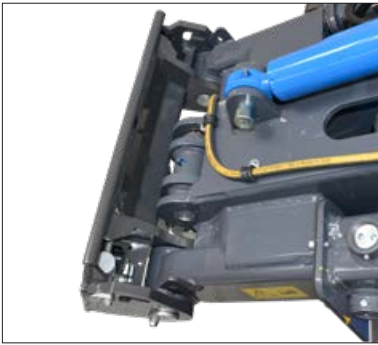

AUTOMATIC LOCKING/UNLOCKING PLATE

On the automatic attachment plate the locking pins move hydraulically and are operated from cockpit.

This way the driver can stay on the seat when coupling and disconnecting non-hydraulic attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



ATTACHMENT COUPLING PLATE FOR REAR MOUNTING

It is used to assemble attachments on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



REAR 12V ELECTRIC SOCKET

12 Volt rear electric socket to connect the attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



ENGINE BLOCK HEATER

It is an ideal device for cold temperatures. The system keeps the engine at an optimal temperature for easy starting with very cold climates. 220V or 110V available.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



WHEEL SPACER KIT

Wheel spacers are used to make the machine wider and increase its stability.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

OPTIONS


■ Standard
 ■ Optional
 ■ Not available



DRIVER AREA COVER

Covers the machine interior, protects against rain, snow, etc.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

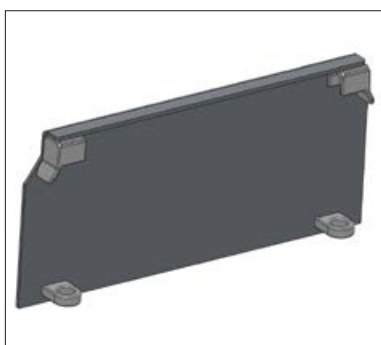


ATTACHMENT COUPLING PLATE

Plate to be welded on the customer's attachment to make it suitable for MultiOne mini loader. To be checked (at customer charge): - applicable laws and safety requirements - machine and circuits interface.

CODE: C880233 (6 mm)

CODE: C880236 (12 mm)

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

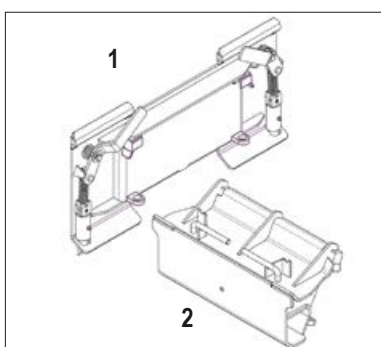

SKID-STEER ATTACHMENT ADAPTER PLATE

Coupling adapter suitable to mount skid steer attachments on MultiOne mini loader.

1 - CODE: C890023 - MT skid steer attachment adapter plate

2 - CODE: C880230 - Mini skid steer attachment adapter plate

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



FLAT FACE COUPLING KIT

Adaptor to be put on the multiconnector, in order to connect standard flat face connections.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



BEACON LIGHT

Orange beacon light mounted on the top of the cab's roof.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

OPTIONS

Standard Optional Not available



MULTI-FUNCTIONS JOYSTICK

The multi-function electronic joystick allows an easy and precise control of the boom and attachments.

1 Series	2 Series	4 Series	5.2 K	5.3 K	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Not available	Optional	Optional	Standard	Standard	Optional	Standard	Standard	Optional



ACI (ATTACHMENTS CONTROL INTERFACE)

ACI system allows the driver to control the attachments movements without the need for separate control boxes, cables or additional wiring. The connection to the attachments is made by a 7-poles socket.

1 Series	2 Series	4 Series	5.2 K	5.3 K	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Optional	Optional	Optional	Standard	Standard	Optional	Standard	Standard	Optional



RUBBER TRACKS

Track drive grant maximum stability & traction, with minimal ground damage and low ground bearing pressure. The large contact area under the tracks reduces pressure, minimises ground damage and avoids sinking into soft soil & creating ruts. (Kit weight 750 kg/1655 lbs)

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Not available	Not available	Not available	Not available	Not available	Not available	Optional	Not available



HI FLOW

It's a additional pump that increases the outlets oil flow.

1 Series	2 Series	4 Series	5.2 K	5.3 K	6 Series	7 Series	8 Series	11 Series	EZ Series
Not available	Not available	Not available	Not available	Standard	Standard	Not available	Standard	Standard	Not available



ONE DRIVE

OneDrive is a brand new transmission system with a performance output over 30% higher than standard circuit.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	Serie EZ
Not available	Not available	Not available	Not available	Not available	Not available	Optional	Optional	Not available

OPTIONS

■ Standard
 ■ Optional
 ■ Not available

CRUISE CONTROL

CRUISE CONTROL

OneDrive hydrostatic transmission allows to set and easily change speed for outstanding control. The machine speed is rock-solid.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



BACKUP WARNING BEEPER

It help keep everyone safer during MultiOne machine operation.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



REAR BULL BAR

It protects the rear side of the machine in case of shocks. With side extensions from 7 series on.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series



SNOW CHAINS

MultiOne snow chains improve traction on snow or ice (Set of 2).

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series




TIE DOWN BRACKET ON WHEEL HUB

The tie down brackets mounted on wheel hub makes easier to tie down the machine on a trailer.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	11 Series	EZ Series

GENERAL BUCKET

<http://tiny.cc/generalbucket>


FEATURES & BENEFITS

- All-round bucket, suitable for almost every shovelling job
- Efficient design and excellent visibility to the edge of the bucket
- Heavy Duty construction with slide wear bars on the bottom
- High breakout force
- Strong cutting edge made of high tensile, abrasion resistant wear steel, designed for bolt-on teeth



The MultiOne bucket design enables good visibility to the cutting edge, making loading, grading, and dumping more efficient. Length of the bucket has been optimized in order to give best possible breakout force. Heavy duty steel construction includes reinforcement plates inside, slide wear bars on the bottom of the bucket, and the cutting edge is designed for bolt-on teeth.

Model	Volume*	Width	Length	Height	Weight	Teeth	Code
80	85 l (3 ft ³)	80 cm (31.5 in)	63 cm (24.8 in)	47 cm (18.5 in)	40 kg (88 lbs)	4	C890001
90	100 l (3.5 ft ³)	90 cm (35.4 in)	67 cm (26.4 in)	47 cm (18.5 in)	44 kg (97 lbs)	4	C895021

(*) verify the lifting capacity of the machine

Accessories

	Weight	Code
Tooth	1,7 kg (3.7 lbs)	C890007

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
80													
90													




Very compatible

Compatible

Not compatible



NEW GENERAL BUCKET
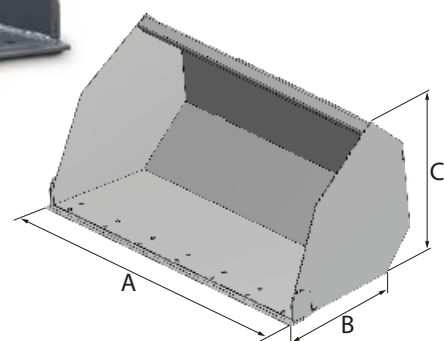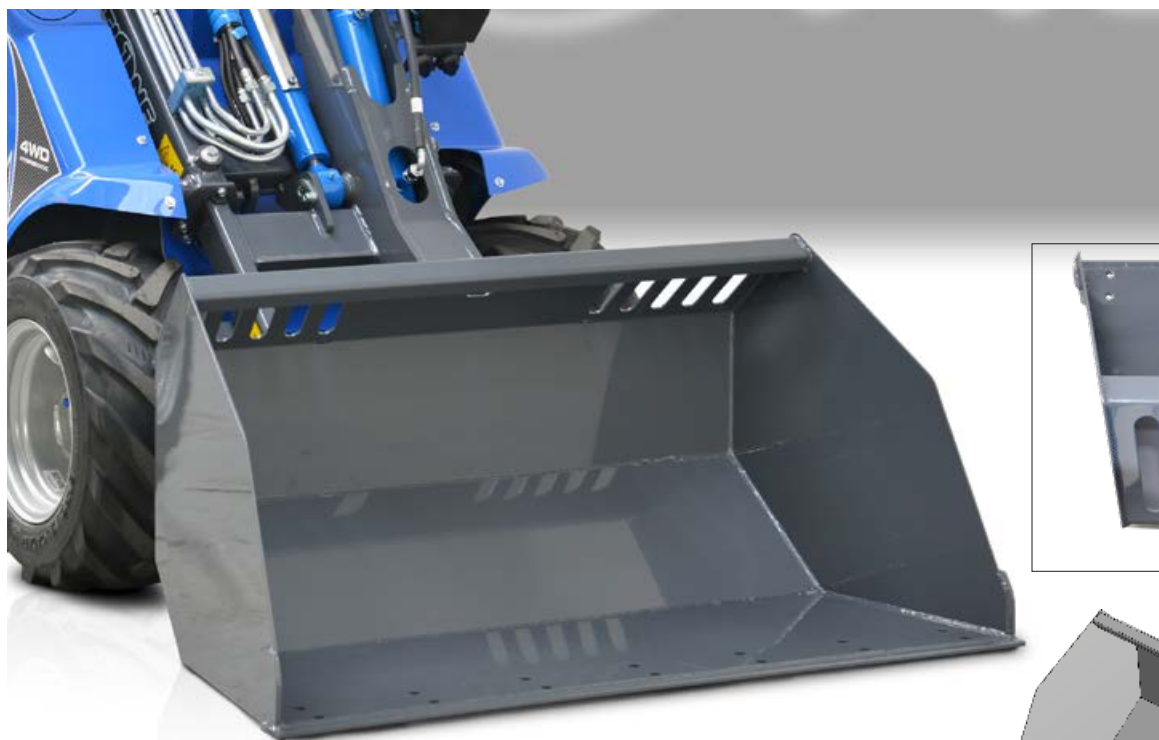
<http://tiny.cc/newgeneralbucket>


FEATURES & BENEFITS

- New efficient design increases volume and visibility
- Bolt-on Teeth and Cutting edge available
- Heavy duty (HD) models available for hard works

The new design of the MultiOne bucket increases the volume and enables good visibility. The inside of the bucket is completely plain and the sides open forward in slight angle which guarantees easy and complete filling and emptying of all kinds of materials. There are narrow holes at the upper end of the bucket which improve visibility and prevent stones from falling towards the operator. The special design allows to stack the buckets one inside the other saving storage space (until 6 on a pallet). Available with cutting edge and teeth.

Model	Volume*	Width (A)	Length (B)	Height (C)	Weight	Teeth	Code
100	205 l (7.2 ft ³)	100 cm (39.4 in)	58 cm (22.8 in)	59 cm (23.2 in)	66 kg (146 lbs)	5	C890031
115	238 l (8.4 ft ³)	115 cm (45.3 in)	58 cm (22.8 in)	59 cm (23.2 in)	74 kg (163 lbs)	6	C890032
130	272 l (9.6 ft ³)	130 cm (51.2 in)	58 cm (22.8 in)	59 cm (23.2 in)	82 kg (181 lbs)	7	C890033
130HD	272 l (9.6 ft ³)	130 cm (51.2 in)	58 cm (22.8 in)	59 cm (23.2 in)	130 kg (287 lbs)	7	C890034
150HD	316 l (11.2 ft ³)	150 cm (59 in)	58 cm (22.8 in)	59 cm (23.2 in)	146 kg (322 lbs)	8	C890035
180HD	383 l (13.5 ft ³)	180 cm (71 in)	58 cm (22.8 in)	59 cm (23.2 in)	170 kg (375 lbs)	10	C890036

(*) verify the lifting capacity of the machine

Accessories

	Weight	Code
Tooth	1,7 kg (3.7 lbs)	C890007

	100	115	130 / 130HD	150HD	180HD
Bolt-on cutting edge					
Code	C890037	C890038	C890039	C890040	C890041

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
115													
130 / 130HD													
150HD													
180HD													

Very compatible

Compatible

Not compatible


LEVELLING BUCKET

<http://tiny.cc/levellingbucket>


FEATURES & BENEFITS

- Excellent visibility to the edge of the bucket
- Sharp back edge enables exact levelling when driving backward
- Heavy Duty construction
- Strong cutting edge made of high tensile, abrasion resistant wear steel

The MultiOne levelling bucket has a sharp back edge which makes levelling easy when driving backward. Low rise design and a long bottom gives excellent visibility to the front edge of the bucket. This also makes levelling easier. The levelling bucket is strong and completely plain inside, which makes the filling and emptying easy. It is an ideal tool to levelling gravel and soils for landscaping and gardening projects.

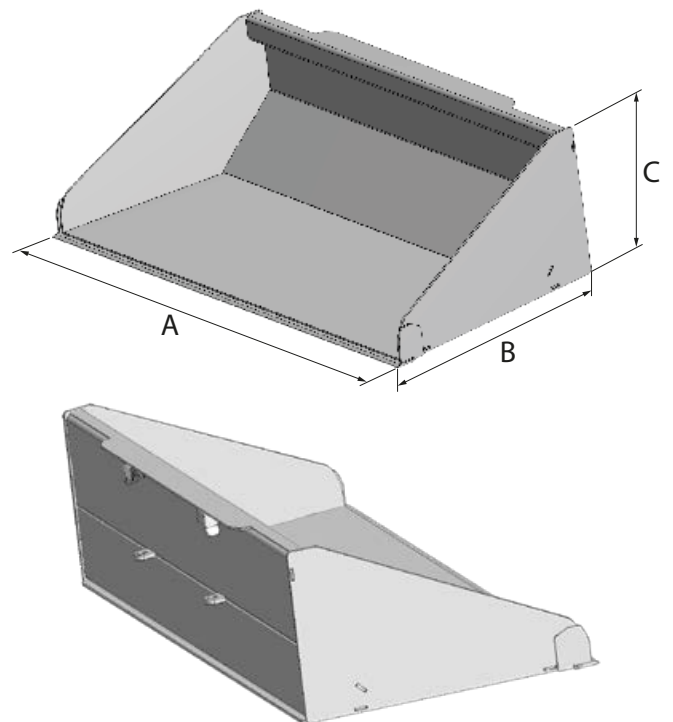

Model	Volume*	Width (A)	Length (B)	Height (C)	Weight	Code
140	244 l (8.6 ft ³)	141 cm (55.5 in)	79 cm (31.1 in)	46 cm (18.1 in)	150 kg (331 lbs)	C890042
160	282 l (10 ft ³)	161 cm (63.4 in)	79 cm (31.1 in)	46 cm (18.1 in)	170 kg (375 lbs)	C890043

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
140													
160													


Very compatible

Compatible

Not compatible



COMBO BUCKET

<http://tiny.cc/combobucket>


FEATURES & BENEFITS

- Heavy duty construction
- Two cylinders with hydraulic locking valve for load holding
- Increased dumping height
- Multiple functions: digging, dozing, grading, grappling, and dumping
- Cutting edge designed for bolt on teeth

This multi-purpose bucket can be used for demolition, landscaping, and general construction work. When used as a grapple, the dual cylinders, equipped with load holding valves, provide a secure clamping force to pick stones, tree stumps etc... The bucket can be opened for fine grading. Another benefit of the opening bottom is that the bucket can be emptied at a higher level by opening the bottom instead of tipping the bucket edge down. Heavy duty steel construction includes a cutting edge that is designed for bolt-on teeth.



Model	Volume*	Width	Length	Height	Opening Angle	Weight	Teeth	Code
110	260 l (9.2 ft ³)	110 cm (43.3 in)	81 cm (32 in)	65 cm (25.6 in)	75°	149 kg (329 lbs)	6	C890075
130	310 l (11 ft ³)	130 cm (51.2 in)	81 cm (32 in)	65 cm (25.6 in)	75°	182 kg (401 lbs)	8	C890076
150	385 l (13.6 ft ³)	150 cm (59 in)	81 cm (32 in)	65 cm (25.6 in)	75°	198 kg (437 lbs)	9	C890077

(*) verify the lifting capacity of the machine

Accessories

	Weight	Code
Tooth	1,7 kg (3.7 lbs)	C890007


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													
130													
150													

Very compatible

Compatible

Not compatible

GRAPPLE BUCKET

<http://tiny.cc/grapplebucket>


FEATURES & BENEFITS

- Versatile bucket for handling of loose materials
- Heavy duty construction
- Easily controlled hydraulic grapple

Grapple bucket combines a normal bucket and a grapple and is therefore suitable for a multitude of jobs.

This bucket is ideally designed to dig and grab difficult material. Heavy duty steel bucket design, combined with the center mounted hydraulic cylinder and efficiently designed grapple teeth, enable this bucket to do multiple jobs, from loading and grading loose soils and materials, to grabbing and loading awkward materials. It can be used for transporting and loading of branches, wood chips, compost, straw, manure, construction waste etc. It can also be used as a normal bucket with the grapple in the upright position.



Model	Width	Length	Height	Opening Angle	Weight	Code
110	110 cm (43.3 in)	67 cm (26.4 in)	47 cm (18.5 in)	84°	119 kg (262 lbs)	C890065
130	130 cm (51.2 in)	67 cm (26.4 in)	47 cm (18.5 in)	84°	134 kg (295 lbs)	C890066


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													
130													

Very compatible

Compatible

Not compatible


DEMOLITION GRAPPLE BUCKET

<http://tiny.cc/grapplebucket>


FEATURES & BENEFITS

- Move hard to handle materials easily
- Two hydraulic grapples easy to operate
- Handles bulky, uneven loads securely

This bucket is designed to handle bulky, irregularly shaped objects found in demolition, industrial, construction, recycling. Ideal for trunks, large rocks, bush, industrial and demolition scrap, and recycling debris. The two grapples are driven by two powerful hydraulic cylinders, this allows them to adapt optimally to the load to be lifted while maintaining a solid and secure grip.

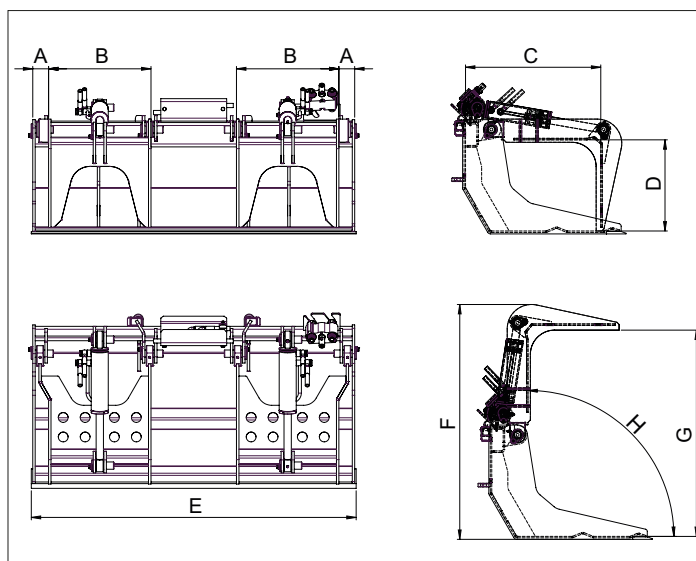

Dimensions (cm/in)

	A	B	C	D	E	F	G	H
Mod. 130	6,5/2.6	42/16.5	55,5/21.8	37/14.7	133/52.5	96/38	85/33	90°
Mod. 150	6,5/2.6	42/16.5	55,5/21.8	37/14.7	153/60	96/38	85/33	90°

Model	Width	Weight	Code
130	130 cm (51.2 in)	200 kg (441 lbs)	C890067
150	150 cm (59 in)	220 kg (485 lbs)	C890064

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
130													
150													


Very compatible

Compatible

Not compatible



LIGHT MATERIAL BUCKET

<http://tiny.cc/lightmatbucket>


FEATURES & BENEFITS

- High capacity
- Good visibility
- Reinforced body

Light material buckets are intended for handling of light weight materials, including grain, forage materials, wood chips, mulch, and snow.

The bottom of a light material bucket is considerably longer and the sides are higher than on a general bucket, which speeds up the work a lot. High back of the bucket prevents material from falling over the rear edge and guarantees high volume. It's equipped with reinforcement plates inside and the strong cutting edge is made of high tensile, abrasion resistant wear steel.



Model	Volume*	Width	Length	Height	Weight	Code
110	400 l (14 ft ³)	110 cm (43.3 in)	76 cm (29.9 in)	77 cm (30.3 in)	90 kg (198 lbs)	C890053

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													

Very compatible

Compatible

Not compatible

NEW LIGHT MATERIAL BUCKET

<http://tiny.cc/newlightmaterialbucket>


FEATURES & BENEFITS

- New efficient design increases volume and visibility
- Design to improve transport optimization
- Great resistance

The new design of the MultiOne bucket increases the volume and enables good visibility. The inside of the bucket is completely plain and the sides open forward in slight angle which guarantees easy and complete filling and emptying of all kinds of materials. The special design allows to stack the buckets one inside the other saving storage space (until 6 on a pallet).

The bottom of a light material bucket is considerably longer and the sides are higher than on a general bucket, which speeds up the work a lot. High back of the bucket prevents material from falling over the rear edge and guarantees high volume.



Model	Volume*	Width	Length	Height	Weight	Code
100	390 l (13.8 ft ³)	101 cm (39.7 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	94 kg (207 lbs)	C890370
115	455 l (16 ft ³)	116 cm (45.6 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	108 kg (238 lbs)	C890371
130	520 l (18.4 ft ³)	131 cm (51.5 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	117 kg (256 lbs)	C890372
150	605 l (21.4 ft ³)	151 cm (59.4 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	134 kg (295 lbs)	C890373
180	735 l (25.9 ft ³)	181 cm (71.2 in)	92 cm (36.2 in)	77,5 cm (30.5 in)	156 kg (344 lbs)	C890374

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
115													
130													
150													
180													

Very compatible

Compatible

Not compatible



HIGH TIP BUCKET

<http://tiny.cc/hightipbucket>


FEATURES & BENEFITS

- Hydraulic operated
- Increased dump height (+ 60 cm / 24 in)
- Excellent volume

High tip bucket is the right choice when you need to reach higher and longer. The bucket is equipped with two hydraulic cylinders that push and tip the bucket over its front edge, which gives considerably more tipping height than with a normal bucket. Increase the dump height of the machine by almost 60 cm (24 in) using the high tip bucket. This increased reach enables loading high-side trucks without the need of a ramp. The bucket is an ideal tool for snow removal, loading of wood chips and for loading works on recycling plants etc. The bucket is available with a flat cutting edge.



Model	Volume*	Width	Length	Height	Weight	Code
100	210 l (8.1 ft ³)	100 cm (39.4 in)	86 cm (33.8 in)	61 cm (24 in)	154 kg (339 lbs)	C890090
130	280 l (9.9 ft ³)	130 cm (51.2 in)	86 cm (33.8 in)	61 cm (24 in)	174 kg (384 lbs)	C890092
150	320 l (11.3 ft ³)	150 cm (59 in)	86 cm (33.8 in)	61 cm (24 in)	188 kg (414 lbs)	C890093
180	380 l (13.4 ft ³)	180 cm (71 in)	86 cm (33.8 in)	61 cm (24 in)	208 kg (460 lbs)	C890094

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
130													
150													
180													

(*) C890025 adapter required

Very compatible

Compatible

Not compatible


PALLET FORK

<http://tiny.cc/palletfork>


FEATURES & BENEFITS

- Must-have attachment
- Heavy duty construction
- Easily adjustable forks width
- Useful attachment on construction sites, farms, as well as on the company's yard doing material handling jobs

The pallet fork enables safe and quick handling of multiple sized pallets. The forks are forged from high strength steel, and are available in several lengths based on model size. The fork frame is designed to allow the width of the forks to be easily adjusted by as much as 1 m / 39 in (70 cm / 27.6 in on C895120). Optional bolt on back stop provides additional safety. MultiOne is an excellent machine for load handling thanks to the precise steering and drive control. Compared with a conventional forklift truck MultiOne is superior when working outdoors and on terrains, on all seasons.

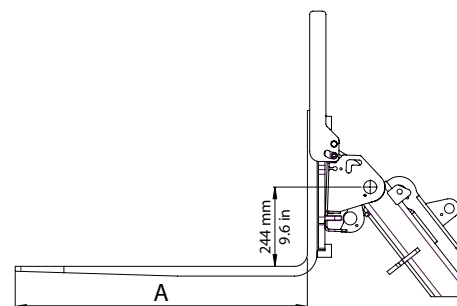

Model	Forks Length (A)	Lifting Capacity ⁵	Width	Weight	Code
80 (frame + forks)	80 cm (31.5 in)	250 kg (551 lbs)	70 cm (27,6 in)	38 kg (84 lbs)	C895120
Frame (without forks) ¹	/	up to 1200 kg (2646 lbs)	100 cm (39,4 in)	31 kg (68 lbs)	C890330
Frame HD (without forks) ²	/	up to 2000 kg (4408 lbs)	100 cm (39,4 in)	43 kg (95 lbs)	C890335
90 (forks pair) ³	90 cm (35.4 in)	1000 kg (2204 lbs)	/	54 kg (119 lbs)	C890331
110 (forks pair) ³	110 cm (43.3 in)	1200 kg (2646 lbs)	/	68 kg (150 lbs)	C890332
120 (forks pair) ⁴	120 cm (47.3 in)	2000 kg (4408 lbs)	/	104 kg (230 lbs)	C890333

(¹) C890331 or C890332 required - (²) C890331 or C890332 or C890333 required - (³) C890330 or C890335 required - (⁴) C890335 required - (⁵) verify the lifting capacity of the machine

Optional (may be required by law)		
Back stop	8 kg (17 lbs)	C890312

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
80	Green	Yellow	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red	Red
90	Red	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Green	Green
110	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
120	Red	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

Very compatible

Compatible

Not compatible



PALLET FORK HYDRAULIC CLAMP

<http://tiny.cc/hydraulicclamp>


FEATURES & BENEFITS

- A unique option for the pallet fork system
- Secures awkward loads to the forks
- Basic attachment for fencing and forest work
- Grabbing and transporting of stones and similar objects also possible

The hydraulic clamp attaches to the pallet fork frame, changing the pallet fork to a versatile grapple system. The hydraulically operated grapple secures loads awkward loads like logs, poles, large tubes, and more.

The grab is equipped with a powerful hydraulic cylinder.

The hydraulic clamp assembly requires either a pallet fork (C890330 frame + forks - not included with the hydraulic clamp).

The back stop (C890312) can't be installed with the hydraulic clamp.



Model	Min. diameter to grab	Max. diameter to grab	Opening Angle	Weight	Code
Pallet Fork Hydraulic Clamp	40 cm (15.7 in)	90 cm (35.4 in)	90°	46 kg (102 lbs)	C890585


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible

JIB CRANE, ONE-PIECE OR TELESCOPIC

<http://tiny.cc/jibcrane>


FEATURES & BENEFITS

- Useful for great outreach and high lift
- Safety hook included
- Compact for good visibility
- Versatile lifting attachment for various load handling jobs

The MultiOne Jib Crane provides additional reach for lifting operations. The jib crane is available in either a one piece design or a hydraulically adjustable telescopic design. Each of these designs includes a heavy duty safety hook.

The one-piece jib crane is equipped with two connecting points, one at the tip of the boom and one 500 mm lower.

The telescopic jib crane enables the load to be kept close to the machine and then extended outwards for placement. The steplessly extending and retracting boom allows lifting to places that would otherwise be very hard to reach. Compact design with telescoping cylinder inside the boom and durable wear pads on the outer boom, makes work safe and easy.

The maximum lifting load varies according to the machine on which it is installed.



Model	Length	Structural capacity*	Weight	Code
One-piece	250 cm (98.4 in)	200 kg (440 lbs)	41 kg (90.4 lbs)	C890710
Telescopic	110+60 cm (43.3+23.6 in)	500 kg (1100 lbs)	85 kg (187.4 lbs)	C890712

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
One-piece													
Telescopic													

Very compatible


Compatible

Not compatible

MULTI ONE

BIG BAG LIFTER

<http://tiny.cc/bigbaglifter>



FEATURES & BENEFITS

- Simple and efficient
- Rounded anti-swing side bars

This attachment enables safe and efficient handling of the oversized product bags containing fertilizer, corn, wood pellets, briquettes, and other granular products.

The anti-sway side bars increase operating safety without damaging the bags.

The heavy-duty construction has been widely tested, proving to be strong, reliable and durable.



Model	Lifting Capacity*	Max Width	Lift Hook Height	Weight	Code
Big Bag Lifter	1200 kg (2645 lbs)	100 cm (39.4 in)	133 cm (52.4 in)	49 kg (108 lbs)	C890713

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatibleCompatibleNot compatible



PALLET FORK WITH SIDE SHIFT

<http://tiny.cc/palletforkwithsideshift>



FEATURES & BENEFITS

- Safely controlled side shift from the driver's position
- Designed to work in tight areas or along narrow aisles
- Different sizes of forks available
- Back stop as standard

Hydraulically side shifting the forks enables easier and safer handling and loading of a wide variety of pallet sizes.

The forks can be moved to the left or to the right, making it possible to shift the load to the side of the machine - closer to a wall for example. This function can be operated from the driver's seat. The fork width is manually adjustable to adapt to different pallets size.

Pallet fork is equipped as standard with a back stop which enables handling of larger loads and protects the driver from falling objects. Different sizes of forks are available.

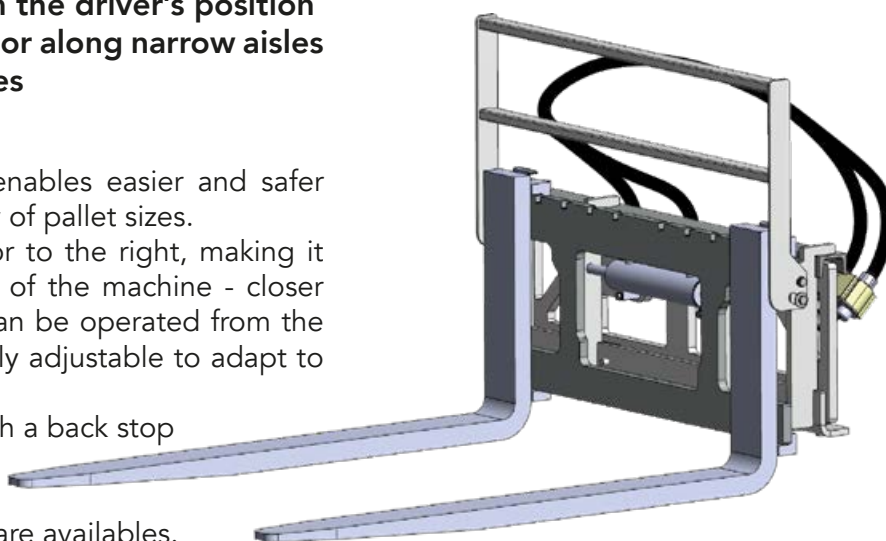

Model	Forks Length	Lifting Capacity ³	Side Shift	Weight	Code
Frame (without forks) ¹	/	/	8,5 cm (3.4 in) to the left 8,5 cm (3.4 in) to the right	96 kg (212 lbs)	C890316
90 (forks pair) ²	90 cm (35.4 in)	1000 kg (2204 lbs)		54 kg (119 lbs)	C890331
110 (forks pair) ²	110 cm (43.3 in)	1200 kg (2646 lbs)		68 kg (150 lbs)	C890332
120 (forks pair) ²	120 cm (47.3 in)	2000 kg (4408 lbs)		104 kg (230 lbs)	C890333

(¹) C890331 or C890332 or C890333 required - (²) C890316 required - (³) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
90													
110													
120													


Very compatible

Compatible

Not compatible



LIFTING TROLLEY

<http://tiny.cc/liftingtrolley>


FEATURES & BENEFITS

- Designed to safely lift and handle heavier loads
- Made from heavy duty steel for reliability
- Excellent fork visibility
- Forks width adjustable

The MultiOne lifting trolley increases the lifting capacity of smaller models of MultiOne machines.

The lifting trolley is ideal for lifting and handling heavy pallets, oversized material bags, and other heavy materials. This unit can also be used to load and unload trucks and trailers.

The lifting trolley is equipped with foam filled rough terrain tires to allow all terrain materials transport. The fork width is manually adjustable to adapt to different pallets size.

Note: suggested floating boom valve on machine.




Model	Forks Length	Lifting Capacity*	Max Lifting Height	Height	Width	Weight	Code
Lifting Trolley	90 cm (35.4 in)	1000 kg (2204 lbs)	170 cm (67 in)	212 cm (83.5 in)	130 cm (51.2 in)	216 kg (476 lbs)	C890481

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible



JOB SITE TOOLBOX

<http://tiny.cc/jobsitetoolbox>


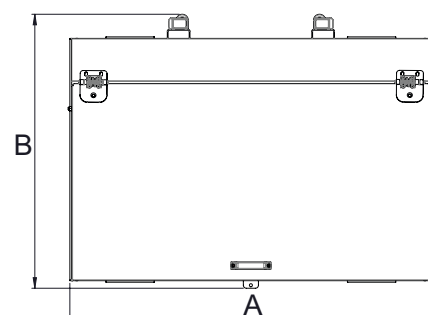
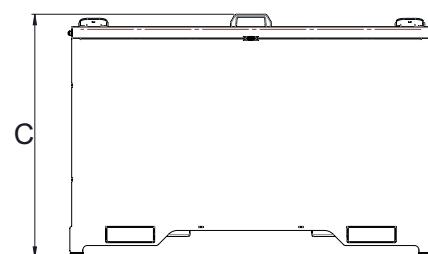
FEATURES & BENEFITS

- **Spacious, lockable box for handheld tools**
- **Easy to lift and transport with MultiOne loader**

This robust and versatile toolbox mounts on the attachment coupling plate can be transported with MultiOne loader to the worksite.

The lid is equipped with gas springs and can be locked with a padlock. The box is also equipped with lifting brackets for forklift.

The box keeps handheld tools in good order and is easy to lift into the back of a van or into a safe place for the night.



Model	Volume	Width (A)	Length (B)	Height (C)	Weight	Code
Job site Toolbox	618 l (21.8 ft ³)	120 cm (47.2 in)	91 cm (35.8 in)	81 cm (31.9 in)	90 kg (198 lbs)	C890920

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible



HEAVY DUTY SILAGE FORK

<http://tiny.cc/silagefork>


FEATURES & BENEFITS

- Heavy duty frame (except mod. 80)
- Versatile and efficient
- Replaceable teeth
- Compact model, which is well suited for silage distributing in small and confined places

The multi-purposed silage fork, in combination with the frame top hydraulic clamp, makes moving loose or baled silage safe and easy. The extra strength framework allows heavy loads, like round bales, to be safely and effectively moved. The lower fork teeth are easily removed and replaced when worn (except mod. 80).



Model	Width	Teeth length	Nr. of teeth	Max load capacity*	Weight	Code
80	80 cm (31.5 in)	48 cm (18.9 in)	5	300 kg (660 lbs)	67 kg (148 lbs)	C895061
95	95 cm (37.4 in)	60 cm (23.6 in)	6	600 kg (1322 lbs)	88 kg (194 lbs)	C890355
120	120 cm (47.3 in)	60 cm (23.6 in)	8	800 kg (1763 lbs)	110 kg (242 lbs)	C890356
150	150 cm (59 in)	60 cm (23.6 in)	9	900 kg (1984 lbs)	130 kg (287 lbs)	C890357

(*) verify the lifting capacity of the machine


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
80													
95													
120													
150													

Very compatible

Compatible

Not compatible

MANURE FORK


<http://tiny.cc/manurefork>


FEATURES & BENEFITS

- Simple design
- Strong, replaceable teeth
- Designed for excellent visibility from the operator's seat

The manure fork is designed to easily handle loose materials like hay, straw, manure or animal bedding. The simple design promotes easy handling of manure. The strong teeth, made of high tensile forged steel, penetrate also into compacted manure and can carry a heavy load.

When worn, the fork teeth are quickly and easily replaced. Two models with different teeth lengths are available.

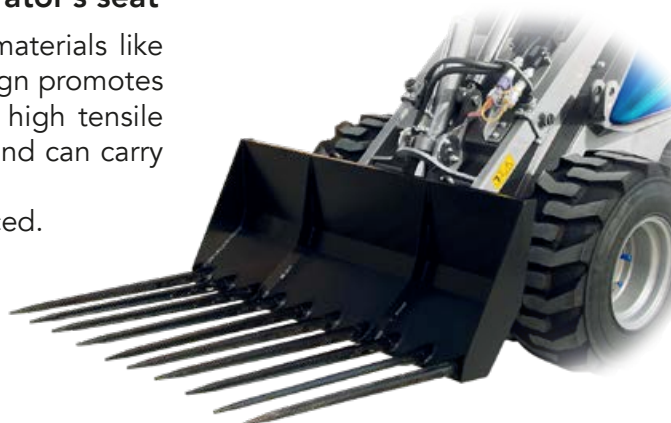

Model	Width	Teeth length	Nr. of teeth	Max load capacity*	Weight	Code
110	110 cm (43.3 in)	110 cm (43.3 in)	10	800 kg (1763 lbs)	85 kg (187.4 lbs)	C890381

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

Very compatible

Compatible

Not compatible

MULTI1NE


BALE HANDLER

<http://tiny.cc/balehandler>


FEATURES & BENEFITS

- Fast and easy way to load and transport bales
- Work perfectly with silage, hay and straw round bales, wrapped bales or unwrapped round bales.
- Adjustable fork wide
- Equipped with rear load support frame

Multione Round Bale Handler is an economical way to handle wrapped bales, without damaging the plastic wrapping. Distance between the forks can be adjusted manually. Bale handler is a good choice if the bales can always be handled sideways and don't need to be grabbed.

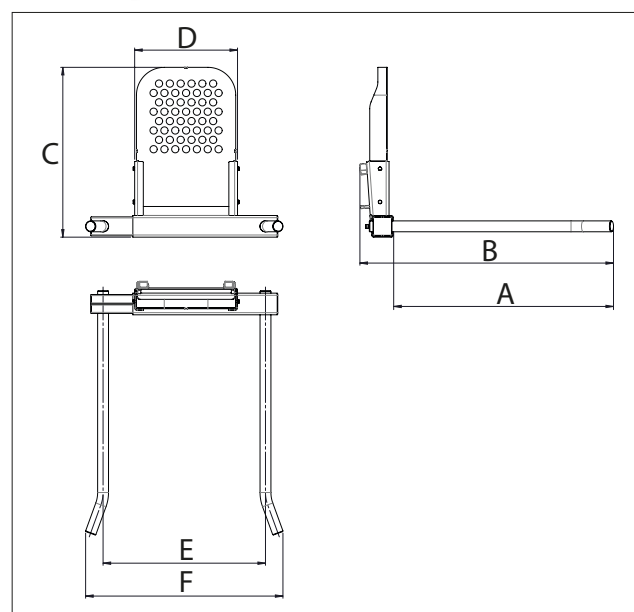

Dimensions						
	A	B	C	D	E (min/max)	F (min/max)
cm	120	140	94	57	90/120	109/139
in	47.2	55.3	37	22.5	35.4/47.2	43/54.8

Model	Forks Length	Max load capacity*	Forks Width min/max	Weight	Code
Bale Handler	120 cm / 47.2 in	1000 kg (2204 lbs)	90 / 120 cm (35 / 47 in)	82 kg (180 lbs)	C890406

(*) verify the lifting capacity of the machine


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Round Bale Handler													

Very compatible

Compatible

Not compatible

HAY BALE GRAPPLE

<http://tiny.cc/balegrabber>


FEATURES & BENEFITS

- Gently but firmly grabs round bales without damaging surface wrap
- Automatically centers the load
- Versatile

This grapple is designed to safely and securely lift and move round hay bales up to 160 cm (5.25 ft) in diameter. The two hydraulically operated clamps provide a great grip over a wide surface area without damaging the bale wrap, and automatically center the load for safe and stable travel and handling. MultiOne machines with their telescopic boom can stack bales even at high heights.



Model	Max bale weight*	Min. Diameter for bale	Max. Diameter for bale	Weight	Code
Hay Bale Grapple	1000 kg (2204 lbs)	97 cm (38.2 in)	160 cm (63 in)	130 kg (287 lbs)	C890410

(*) verify the lifting capacity of the machine


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible


BALE FORK

<http://tiny.cc/roundbalefork>


FEATURES & BENEFITS

- Easy and economical way to lift and transport bales
- Two models: 2 or 3 teeth
- Strong, replaceable teeth

Designed to carry any kind of bales, round or square. The load balancing spikes are bolted into the fork body, making them easily replaceable. It is the ideal accessory for gathering hay bales in the field and loading them on trailers. Moreover, the small dimensions make all operations inside stables and barns simple. Strong and simple construction ensures a long lifespan.

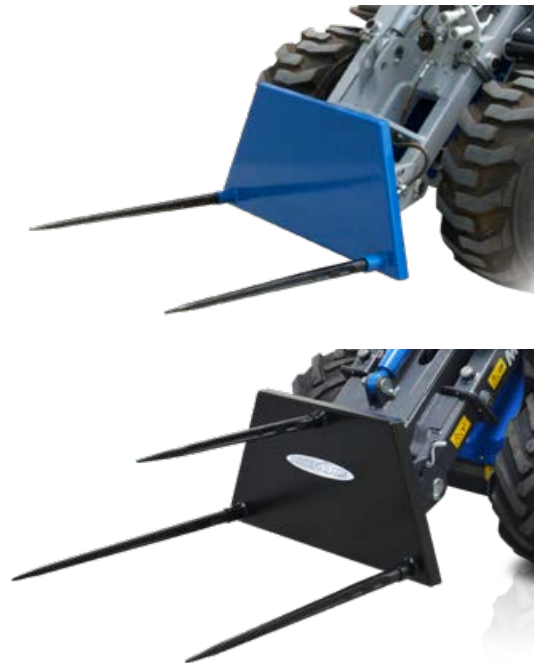

Model	Width	Teeth length	Max load capacity*	Weight	Code
Bale Fork (2 Teeth)	85 cm (33.5 in)	2 x 80 cm (31.5 in)	600 kg (1322 lbs)	40 kg (88.2 lbs)	C890400
Bale Fork (3 Teeth)	85 cm (33.5 in)	2 x 110 cm (43.3 in) + 1 x 80 cm (31.5 in)	600 kg (1322 lbs)	45 kg (99.2 lbs)	C890401

(*) verify the lifting capacity of the machine


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Bale Fork (2 Teeth)													
Bale Fork (3 Teeth)													

Very compatible

Compatible

Not compatible



SQUARE BALE CLAMP

<http://tiny.cc/squarebales>


FEATURES & BENEFITS

- Suitable for bales from 75 cm (2.5 ft) to 230 cm (7.6 ft)
- 2 cylinders
- Transport wrapped square bales without damaging the plastic

This clamp was designed to transport and stack round and square bales without damaging the plastic wrapping or net. Made from heavy duty steel, this clamp quickly and easily handles all types of bales, including silage, hay, and straw. The large clamp arms makes pick-up and storage of all bales sizes quick and easy. MultiOne machines with their telescopic boom can stack bales even at high heights.

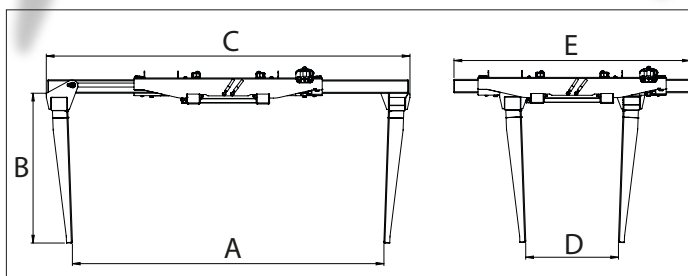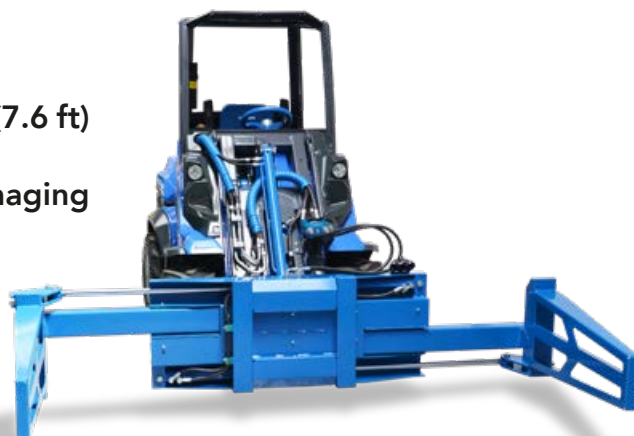

Dimensions					
	A	B	C	D	E
cm	232	112	271	69	176
in	91.2	43.9	106.5	27.2	69.2

Model	Max bale weight*	Min bale length	Max bale length	Weight	Code
Square Bale Clamp	1000 kg (2204 lbs)	75 cm (29.5 in)	230 cm (90.5 in)	270 kg (595 lbs)	C890415

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
<div style="display: flex; justify-content: space-around; align-items: center;"> Very compatible Compatible Not compatible </div>													




HORSE ARENA HARROW

<http://tiny.cc/horsearenaharrow>



FEATURES & BENEFITS

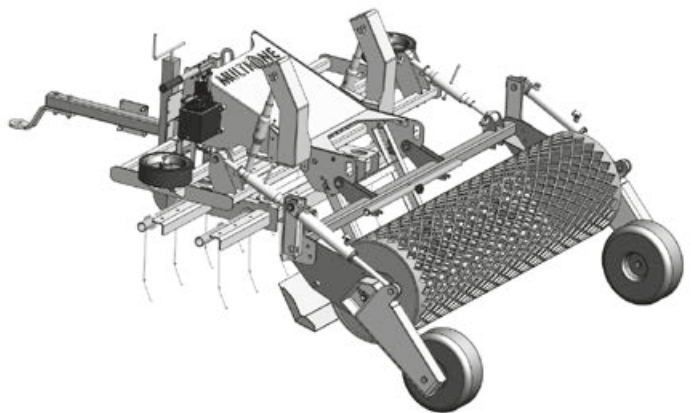- Multi-function surface processing
- A professional harrow that makes it easy to keep the horse arena in top condition
- Can be adjusted for several kinds of riding surfaces
- Once the adjustments have been done the harrow is very easy to use
- Support wheels: the harrow can be lifted off the ground and towed to desired place




The horse arena harrow is designed to smooth and level sandy or mixed media horse riding surfaces. The harrow features multiple processes, beginning with the three sets of spring tines to break up the surface, a leveler to smooth and level the surface, and the compacting and spreader auger roller assembly that finishes the surface. The harrow also has side wheels that enable working along walls with no damage. Easily made adjustments enable weight and balance adjustments between the spring tines and roller/spreader assembly. Height adjustments to enhance processing difficult soils are made quickly and easily.

Note: the loader must be equipped with the trailer coupling.

Model	Width				Working Depth				Weight				Code	
160	160 cm (63 in)				0 - 9 cm (0 - 3.5 in)				218 kg (480 lbs)				C891231	
Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8	
<div><div></div><div>Very compatible</div><div>Compatible</div><div>Not compatible</div></div>														

FEED DISPENSER

<http://tiny.cc/feeeddispenser>


FEATURES & BENEFITS

- Easy distribution of flour, crushed grain etc.
- Self-loading: loading from ground level like with a normal bucket

MultiOne's animal feed dispensers bucket makes feeding the animals quick and easy. The front edge of the feed dispenser bucket can be used to easily fill up the bucket feeder. Feed is dispensed from the right side discharge chute, using the hydraulically powered auger located at the bottom of the feeder. The feed dispenser is designed to handle any sized grain and mix, making animal feeding a quick and simple process.



Model	Capacity*	Width	Discharge Side	Weight	Code
350	350 l (12.4 ft³)	130 cm (51.2 in)	Right	140 kg (309 lbs)	C890420
520	520 l (18.4 ft³)	180 cm (70.9 in)	Right	210 kg (463 lbs)	C890421

(*) verify the lifting capacity of the machine


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
350													
520													

Very compatible

Compatible

Not compatible

SCREW FEED PUSHER


<http://tiny.cc/feedpusher>


FEATURES & BENEFITS

- Fast and easy way of moving feed to the animals
- Discharge in the right side
- High efficiency, also on larger farms
- Rear rubber scraper blade

Efficient way of moving uneaten feed back in front of the cattle. When moving, the screw mixes the feed and the fresh feed remains on top.

With the screw feed pusher drive speed can be higher. The rubber scraper blade at the rear of the attachment cleans the floor very efficiently. Once worn out, the rubber blade can be disassembled and reassembled backwards or replaced.

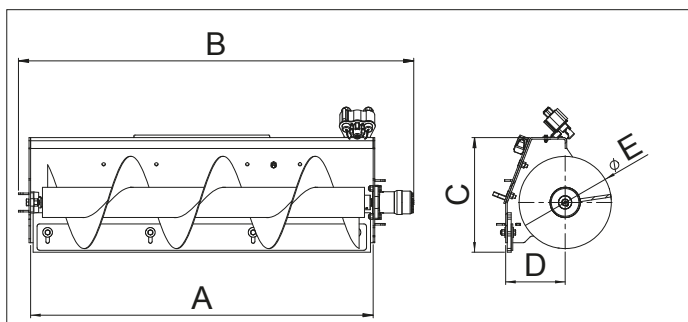

Dimensions					
	A	B	C	D	E
cm	130	150	44	23	35
in	51.2	59	17.1	8.9	13.8

Model	Working Width	Height	Weight	Code
Screw Feed Pusher	130 cm (51.2 in)	44 cm (17.3 in)	115 kg (254 lbs)	C890250


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible

RUBBER SCRAPER

<http://tiny.cc/rubberscraper>


FEATURES & BENEFITS

- Heavy duty rubber blade
- Simple and efficient
- Each ends of the scraper blade can be adjusted forwards

The MultiOne rubber scraper is ideal for cleaning smooth surfaces in farm buildings and yards, improving hygiene and footing. It is also a easy and economical way to push uneaten silage back to the cattle on the feeding table.

The side ends can be tilted 30° forward to facilitate the movement of the material. Once worn out, the rubber blade can be disassembled and reassembled backwards or replaced.



Model	Width	Rubber Height	Weight	Code
150	150 cm (59 in)	35 cm (13.8 in)	73 kg (161 lbs)	C890361
200	200 cm (78.7 in)	35 cm (13.8 in)	86 kg (190 lbs)	C890358

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
150													
200													

Very compatible

Compatible

Not compatible



PUSH BROOM

<http://tiny.cc/pushbroom>


FEATURES & BENEFITS

- Simple design creates minimal dust
- Few moving parts means low maintenance
- Works perfectly for horse stables, farms, other brushing applications

The Push broom from MultiOne provides an economical solution to clear dirt on stables and farms, but it can be used to remove fallen leaves and other outdoor materials over a smaller area, like sidewalks or parking. This push broom uses a simple design that creates minimal dust while preventing flying stones or other debris. The brush is constructed from heavy-gauge polypropylene, providing long-lasting performance. There are two adjustable wheels that keep the height of the brush constant from the ground. The push broom is equipped with supports which can be extended when the broom is not in use, so that the push broom rests on the supports and the brush doesn't get damaged during storage. There are two slits where insert the pallet forks.

Note: suggested floating boom valve on machine.



Model	Max Width	Brush Width	Length	Brush Height	Weight	Code
Push Broom	184 cm (72.5 in)	160 cm (63 in)	72 cm (28.3 in)	25 cm (9.8 in)	205 kg (452 lbs)	C890255

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible



DOZER BLADE

<http://tiny.cc/dozerblade>


FEATURES & BENEFITS

- Rugged design delivers maximum uptime
- Dozer blade can be angled 30 degrees left and right

The MultiOne dozer blade can be angled from the driver's seat, either on the right or on the left, thanks to a sturdy hydraulic cylinder. It is equipped with two adjustable back shoes to set the working depth. It can be used for a wide variety of jobs, from scraping hard soils, to grading and stacking loose soils, quick and easy. An ideal tool for projects from rough construction through fine landscaping. Thanks to the excellent traction and the high pushing force of the MultiOne machines, it can also be used for heavy-duty earthmoving jobs.

It must not be used for snow removal along roads and parking lots (in this cases must be used the snow plow or snow blade).



Model	Width	Slewing angle	Height	Weight	Code
140	140 cm (55.1 in)	±30°	53 cm (20.8 in)	90 kg (198 lbs)	C890470
180	180 cm (71 in)	±30°	53 cm (20.8 in)	105 kg (232 lbs)	C890477

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
140													
180													


Very compatible

Compatible

Not compatible



TRENCHER

<http://tiny.cc/trencher>


FEATURES & BENEFITS

- Minimal damage to the ground on trenching area
- Digs from 14 to 20 cm (5.5 to 7.9 in) wide trench and moves all ground to the right side of the trench
- Very fast and clean way to dig trenches for cables, drains, piping etc.

With MultiOne and trencher you can easily dig narrow trenches without damaging the ground on the digging area. The trencher does a clean trench which can easily be filled with a bucket or a dozer blade. Planetary drive with hydraulic motor guarantee powerful and trouble free operation. Max digging depths are 60, 90 and 120 cm (23.6, 35.4 and 47.2 in) respectively, depending on model. Digging width is either 14, 16, 18 or 20 cm (5.5, 6.3, 7.1 or 7.9 in), every chain tools kit can be set for different widths. Hard ground version chains have tungsten reinforcements to ensure long lasting performance in hard and rocky soil, otherwise the standard version is the best choice for vegetative ground.

- Trencher is ideal for smaller cable or pipe laying.
- Digging speed with a trencher is 2-3 times quicker compared to a backhoe.
- Combination of an articulated MultiOne and trencher leaves almost no marks of digging operations after the work is done. This makes it a perfect solution for gardens and other lawn areas.

It features an adjustable depth control foot which ensures the operator digs at a set depth at all times and efficient spoil removal for effective compaction back into the trench.

Model	Max Digging Depth	Max Digging Width	Weight	Code
Trencher 60 w/o chain tools ¹	60 cm (23.6 in)	14 to 20 cm (5.5 to 7.9 in)	205,5 kg (453 lbs)	C890206
Trencher 90 w/o chain tools ¹	90 cm (35.4 in)	14 to 20 cm (5.5 to 7.9 in)	235 kg (518 lbs)	C890207
Trencher 120 w/o chain tools ¹	120 cm (47.2 in)	14 to 20 cm (5.5 to 7.9 in)	248 kg (547 lbs)	C890208
Tools	Trencher 60	Trencher 90	Trencher 120	
Tools kit for soft ground ²	C891002	C891003	C891004	
Tools kit for hard ground ²	C891005	C891006	C891007	

(¹) Tools kit required. (²) Trencher required.


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
60 - soft ground													
90 - soft ground													
120 - soft ground													
60 - hard ground													
90 - hard ground													
120 - hard ground													

Very compatible

Compatible

Not compatible

MINI DIGGER
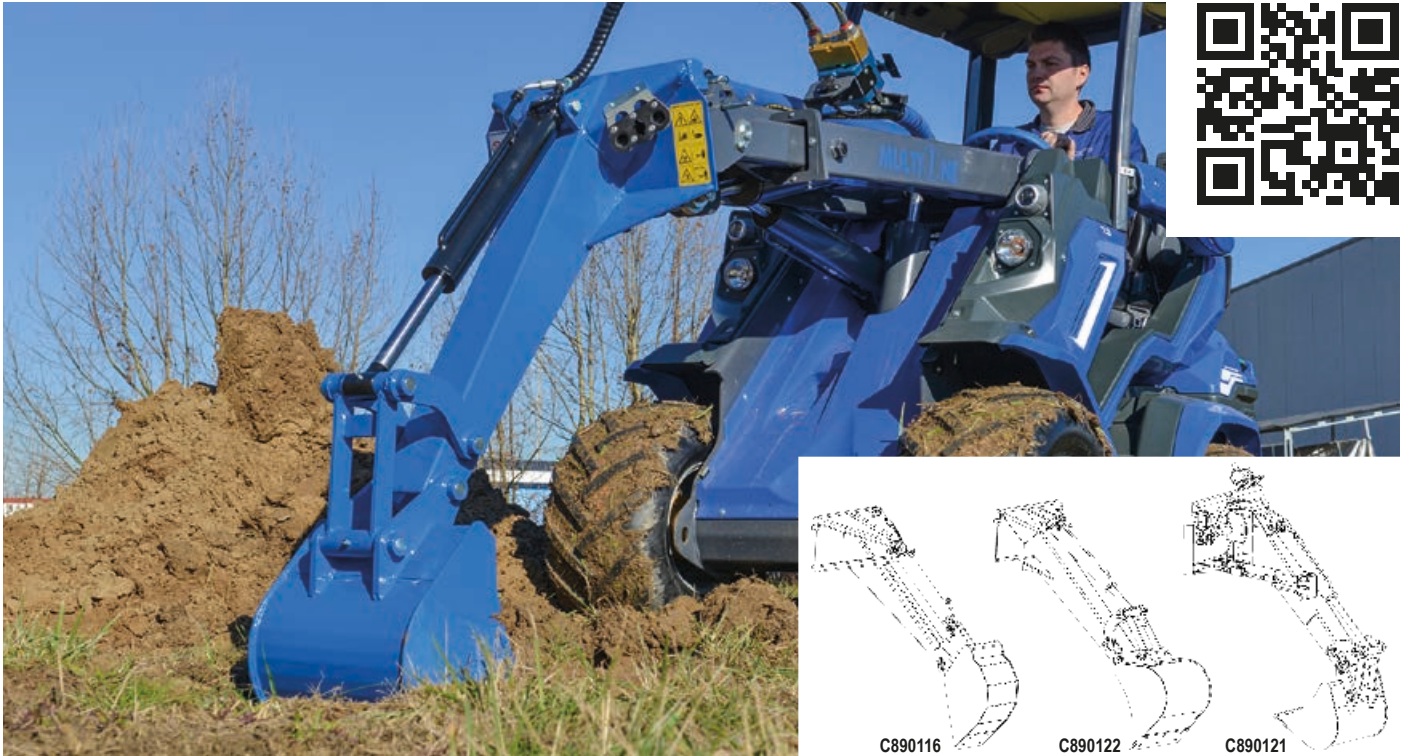
<http://tiny.cc/minidigger>


FEATURES & BENEFITS

- Efficient and economical solution for smaller digging jobs
- 90° rotation model available
- Very fast to mount on Multione
- Simple and light to transport from job site to another
- High unloading height
- Material can easily be transported further away

MultiOne mini digger is an efficient solution for small digging operations where maximum digging depth of 1200 mm or 1500 mm is enough and digging is not an everyday work. It mounts directly on the quick attach plate of the loader and is operated with the auxiliary hydraulics control lever, or with the buttons of the joystick.

Dumping to the side happens by turning the steering wheel of the MultiOne. It's also available a model with 90° (45° to left and 45° to right) hydraulic rotation for easy work. Three models of buckets are available (only for C890121 and C890122 models) and digging teeth can be installed for the hardest terrains. 2 teeth for Bucket 25 cm, 3 teeth for Bucket 40 cm and 5 teeth for Bucket 70 cm.

Model	Length	Volume	Weight	Code
Mini-digger with bucket 25 cm (9.8 in)	130 cm (51.2 in)	15,5 l (0.55 ft ³)	70 kg (154 lbs)	C890116
Mini-digger with bucket 40 cm (15.7 in)	150 cm (59 in)	26 l (0.92 ft ³)	80 kg (176 lbs)	C890122
90° rotation mini-digger w/bucket 40 cm (15.7 in)	165 cm (65 in)	26 l (0.92 ft ³)	130 kg (287 lbs)	C890121
Options				
Bucket 25 cm (9.8 in) only for C890121 and C890122		15,5 l (0.55 ft ³)	25 kg (55 lbs)	C890123
Bucket 70 cm (27,5 in) only for C890121 and C890122		47 l (1.66 ft ³)	47 kg (104 lbs)	C890124
Bolt-on tooth kit (each)		/	1,7 kg (3.7 lbs)	C890007

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
25													
40 / 40 with rotation													


Very compatible

Compatible

Not compatible



BACKHOE

<http://tiny.cc/backhoe>


FEATURES & BENEFITS

- **Powerful backhoe, with 180° rotation**
- **Excellent visibility of the digging area**
- **Easy to connect and disconnect to Multione**
- **Smooth movements, easy to operate**
- **Powerful and professional backhoe with good outreach**

The MultiOne backhoe is a compact yet powerful excavator. It's ideal for landscaping and nursery projects, sewage system and septic tank excavating, water and power line trenching, and many other excavating projects. Using MultiOne's quick mount system, this backhoe is quick and easy to attach. The independent operator's seat and hydraulic controls comes as standard. Thanks to the traction and the maneuverability of the MultiOne machines, it will be possible to reach the most inaccessible job sites. Three models of buckets are available and digging teeth can be installed for the hardest terrains. 2 teeth for Bucket 25 cm, 3 teeth for Bucket 40 cm and 5 teeth for Bucket 70 cm.

Mod.	A	B	C	D	E	F	G	H	I	L	
215	270 cm (106.4 in)	177 cm (69.5 in)	271 cm (106.6 in)	73 cm (28.7 in)	189 cm (74.4 in)	175 cm (68.8 in)	221 cm (87 in)	85°	27 cm (10.5 in)	172°	
260	314 cm (123.6 in)	222 cm (87.4 in)	320 cm (126 in)	93 cm (36.6 in)	208 cm (81.9 in)	198 cm (78.1 in)	267 cm (105 in)	85°	27 cm (10.5 in)	172°	
Model			Digging Depth		Width		Volume		Weight		Code
Backhoe 215 w/bucket 40			215 cm (84.6 in)		/		26 l (0.92 ft³)		530 kg (1168 lbs)		C890117
Backhoe 260 w/bucket 40			260 cm (102.4 in)		/		26 l (0.92 ft³)		600 kg (1322 lbs)		C890120
Options											
Bucket 25 cm (9.8 in)			/		25 cm (9.8 in)		15,5 l (0.55 ft³)		25 kg (55 lbs)		C890123
Bucket 70 cm (27,5 in)			/		70 cm (27.5 in)		47 l (1.66 ft³)		47 kg (104 lbs)		C890124
Bolt-on tooth kit (each)			/		/		/		1,7 kg (3.7 lbs)		C890007

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
215													
260													

Very compatible

Compatible

Not compatible

RADIO CONTROLLED BACKHOE


<http://tiny.cc/rcbackhoe>


FEATURES & BENEFITS

- Full Visibility
- Proportional controls
- Fast and easy to use

The MultiOne Backhoe it's a best seller attachment: sturdy, reliable with a huge pushing force and almost 180° rotation. MultiOne believes in the continuous improvement: from now on it's available the radio controlled version of MultiOne Backhoe! The proportional controls assure smooth and accurate movements. Thanks to the radio control the operator's seat and hydraulic control are no longer necessary: you can control the backhoe directly from the machine seat or occupy the best position to see the digging area.

It's the best choice to operate on tight spaces and wherever the digging precision it's required. Three models of buckets are available and digging teeth can be installed: 2 teeth for Bucket 25 cm, 3 teeth for Bucket 40 cm and 5 teeth for Bucket 70 cm.

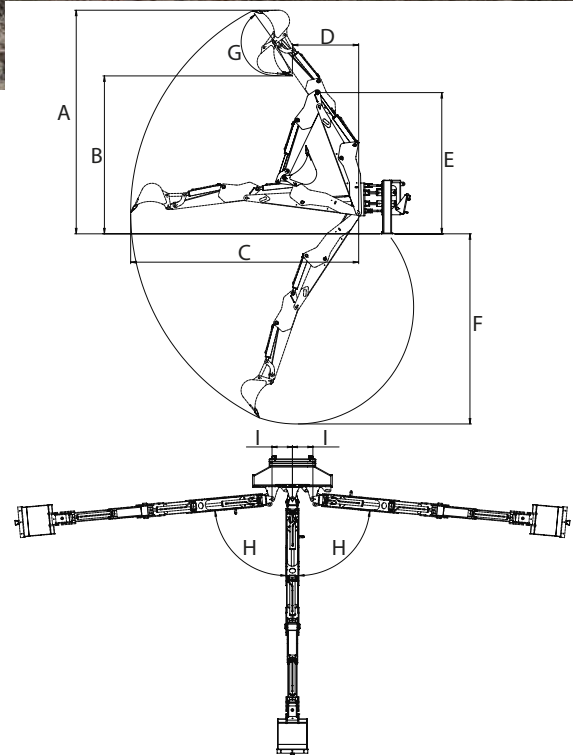

Mod.	A	B	C	D	E	F	G	H	I	
215	270 cm (106.4 in)	177 cm (69.5 in)	271 cm (106.6 in)	73 cm (28.7 in)	175 cm (68.8 in)	221 cm (87 in)	172°	85°	27 cm (10.5 in)	
260	314 cm (123.6 in)	222 cm (87.4 in)	320 cm (126 in)	93 cm (36.6 in)	198 cm (78.1 in)	267 cm (105 in)	172°	85°	27 cm (10.5 in)	
Model		Digging Depth		Width		Volume		Weight		Code
Backhoe 215 w/bucket 40		215 cm (84.6 in)		/		26 l (0.92 ft³)		510 kg (1124 lbs)		C890125
Backhoe 260 w/bucket 40		260 cm (102.4 in)		/		26 l (0.92 ft³)		580 kg (1278 lbs)		C890126
Options										
Bucket 25 cm (9.8 in)		/		25 cm (9.8 in)		15,5 l (0.55 ft³)		25 kg (55 lbs)		C890123
Bucket 70 cm (27,5 in)		/		70 cm (27.5 in)		47 l (1.66 ft³)		47 kg (104 lbs)		C890124
Bolt-on tooth kit (each)		/		/		/		1.7 kg (3.7 lbs)		C890007

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
215													
260													


Very compatible

Compatible

Not compatible

MULTI1ONE

AUGER

<http://tiny.cc/auger>


FEATURES & BENEFITS

- Wide range of auger drive units with different torques enables efficient use of 10 cm (4 in) to 100 cm (40 in) augers
- Augers with tungsten teeth available

The powerful hydraulic auger drive unit, combined with various auger diameters, provide excellent flexibility in all soil types.

The auger is the ideal accessory to perform holes for fences, poles for vineyards, for trees planting, for the installation of pillars or streetlights in all types of terrain. The auger drive is available in three versions:

- T1 for normal soil conditions
- T2 for hard, rocky ground, used with augers up to 50 cm (20 in)
- T3 for hard, rocky ground, used with augers up to 100 cm (40 in)

A large variety of augers are also available with replaceable tungsten teeth for the most difficult terrains, and it is also possible to install extensions, each 1 m long, to reach greater digging depths. The augers are equipped with a special joint that allows to make a perfectly vertical hole no matter how the machine is positioned. The auger combined with the high hydraulic flow of MultiOne machines allows you to drill holes quickly in any terrain.



Model	Torque	Drills	Weight	Code
T1 – standard drive unit	100 kgm	10 - 50 cm (4 - 19.7 in)	90 kg (198 lbs)	C890830
T2 – heavy duty drive unit	180 kgm	10 - 50 cm (4 - 19.7 in)	110 kg (242 lbs)	C890831
T3 – heavy duty drive unit	400 kgm	30 - 100 cm (11.8 - 39.4 in)	150 kg (331 lbs)	C890832

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
T1													
T2													
T3													

Very compatible

Compatible

Not compatible



OPTIONS FOR AUGER

Heavy Duty Auger Drill	Diameter	Length	Code
10	10 cm (4 in)	100 cm (39.4 in)	C890840
15	15 cm (6 in)	100 cm (39.4 in)	C890841
20	20 cm (7.9 in)	100 cm (39.4 in)	C890842
25	25 cm (9.8 in)	100 cm (39.4 in)	C890843
30	30 cm (11.8 in)	100 cm (39.4 in)	C890844
35	35 cm (13.8 in)	100 cm (39.4 in)	C890845
40	40 cm (15.7 in)	100 cm (39.4 in)	C890846
50	50 cm (19.7 in)	100 cm (39.4 in)	C890847
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890849
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890851
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890853
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890855
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890857
Auger Drill w/tugsten teeth Rock Drill	Diameter	Length	Code
15	15 cm (6 in)	100 cm (39.4 in)	C890880
20	20 cm (7.9 in)	100 cm (39.4 in)	C890881
25	25 cm (9.8 in)	100 cm (39.4 in)	C890882
30	30 cm (11.8 in)	100 cm (39.4 in)	C890883
35	35 cm (13.8 in)	100 cm (39.4 in)	C890884
40	40 cm (15.7 in)	100 cm (39.4 in)	C890885
50	50 cm (19.7 in)	100 cm (39.4 in)	C890886
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890888
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890890
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890892
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890894
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890896
Auger Drill Extension	Diameter	Length	Code
10	10 cm (4 in)	100 cm (39.4 in)	C890860
15	15 cm (6 in)	100 cm (39.4 in)	C890861
20	20 cm (7.9 in)	100 cm (39.4 in)	C890862
25	25 cm (9.8 in)	100 cm (39.4 in)	C890863
30	30 cm (11.8 in)	100 cm (39.4 in)	C890864
35	35 cm (13.8 in)	100 cm (39.4 in)	C890865
40	40 cm (15.7 in)	100 cm (39.4 in)	C890866
50	50 cm (19.7 in)	100 cm (39.4 in)	C890867
60 - T3 auger only	60 cm (23.6 in)	100 cm (39.4 in)	C890869
70 - T3 auger only	70 cm (27.6 in)	100 cm (39.4 in)	C890871
80 - T3 auger only	80 cm (31.5 in)	100 cm (39.4 in)	C890873
90 - T3 auger only	90 cm (35.4 in)	100 cm (39.4 in)	C890875
100 - T3 auger only	100 cm (39.4 in)	100 cm (39.4 in)	C890877

CEMENT MIXER

<http://tiny.cc/cementmixer>


FEATURES & BENEFITS

- Faster than a stand alone mixer
- Designed to work in hard-to-reach areas
- Easy way to make concrete in places where electricity is not available
- Bidirectional rotation

The hydraulically powered cement mixer is an inexpensive attachment that lets you mix, transport, and pours concrete faster than a stand-alone mixer. This unit's compact size makes it the ideal tool when working on sidewalks, driveways, footings, small building floors, and other hard-to-reach or limited access areas where electricity is not available.

The concrete can be mixed in the deposit material area and then quickly transported to the working area. Thanks to the lifting boom of MultiOne machines, even the concrete pouring is much easier. The solid structure and direct drive transmission ensure long life and low maintenance.




Model	Volume*	Weight	Code
Cement Mixer	350 l (12.4 ft ³)	95 kg (210 lbs)	C890131

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Not compatible

MULTI¹ONE

CONCRETE MIXING BUCKET

<http://tiny.cc/concretemixingbucket>


FEATURES & BENEFITS

- Hydraulically powered mixing and unloading system
- Easy and efficient way to make concrete in places where electricity is not available
- Self loading, sand can be taken to the bucket directly from the pile
- Concrete can be poured to over 2 m height
- Removable safety grill promotes easy cleaning and maintenance

The concrete mixing bucket allows the operator to load, mix, transport, and discharge concrete much faster than the traditional stand-alone mixer and wheel barrow. This unit's compact size, when combined with the MultiOne, makes it ideal for pouring sidewalks, driveways, footings, small buildings floors, and many other limited access locations. The bucket is emptied from the bottom hatch. Hatch opening is powered by a hydraulic cylinder controlled from driver's seat. The bucket is also equipped with a flexible emptying tube which mounts on the bottom hatch. This enables pouring of the concrete further away from the bucket. Designed for high volume production, this unit minimizes downtime.

Combined with the MultiOne, it becomes an efficient, reliable, and cost efficient system.



Model	Volume*	Outlet Ø	Hose Length	Weight	Code
200	200 l (7 ft ³)	13,5 cm (5.3 in)	160 cm (63 in)	220 kg (485 lbs)	C890140
250	250 l (8.8 ft ³)	18 cm (7.1 in)	150 cm (59 in)	320 kg (706 lbs)	C890141

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
200													
250													


Very compatible

Compatible

Not compatible



HYDRAULIC BREAKER

<http://tiny.cc/hydraulicbreaker>


FEATURES & BENEFITS

- Top quality sound isolated MultiOne breakers are quiet and powerful
- High power-to-weight ratio
- Compact dimensions

The narrow breaker profile enables the breaker to reach into places that other breakers can't.

With a minimum of seals and moving parts, the MultiOne hydraulic breaker provides unsurpassed durability and simplified maintenance. It is equipped with a vibration damping system that also attenuates noise emission. MultiOne loader with breaker is a very efficient tool in demolition and refurbishing operations: do the demolition with Multione and breaker, take the debris away with Multione and bucket – very fast and effective.

Another benefit of this combination is its compact dimensions: you can go almost anywhere with this unit.



MOIL	CHISEL
STANDARD	



Model	Impact energy	Impact rate	Ø Tool	Weight	Code
DMS 50	120 J	1200 bpm	38 mm (1,3 in)	60 kg (132 lbs)	C890163
DMS 95/2	240 J	1200 bpm	45 mm (1,8 in)	95 kg (210 lbs)	C890164
DMS 165	330 J	1200 bpm	45 mm (1,8 in)	165 kg (365 lbs)	C890165

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
DMS 50													
DMS 95/2													
DMS 165													

Very compatible

Compatible

Not compatible

SWEEPER WITH COLLECTOR BOX

<http://tiny.cc/sweeper2>


FEATURES & BENEFITS

- Powerful sweeper for large areas
- Side brush available
- Humidification kit available

Whether traveling forward or backwards, this attachment quickly and quietly sweeps and collects dirt and debris, and easily dumps out the refuse. Perfect system for cleaning parking lots, sidewalks, loading docks, warehouses, and more. The MultiOne sweeper is equipped with a floating attachment bracket and 4 support wheels that guarantee smooth and easy sweeping operations. The sweeping angle is manually adjusted (30° to the left and + 30° to the right). Optional: 1) Collector box with manual opening lever (C895001) or electric opening (C890266 and C890268). 2) Dust reduction water spray system is made up of a 12V electric pump, 4 spray nozzles, and one or two water tanks (70 l each). 3) A single 500 mm (20 in) hydraulically driven side brush can be mounted on the right side of the collector box.

Note: suggested floating boom valve on machine.

Model	Width	Diameter	Volume	Weight	Code
Sweeper 100	100 cm (39.4 in)	35 cm (13.8 in)	/	130 kg (287 lbs)	C890229
Sweeper 120	120 cm (47.2 in)	48 cm (18.9 in)	/	153 kg (337 lbs)	C890265
Sweeper 150	150 cm (59 in)	48 cm (18.9 in)	/	173 kg (381 lbs)	C890267
Waste box for Sweeper 100	100 cm (39.4 in)	/	70 l (2,5 ft³)	40 kg (88.2 lbs)	C895001
Waste box for Sweeper 120	120 cm (47.2 in)	/	90 l (3,2 ft³)	50 kg (110 lbs)	C890266
Waste box for Sweeper 150	150 cm (59 in)	/	115 l (4 ft³)	57 kg (125.6 lbs)	C890268
Humidification kit for Sweeper 120	/	/	70 l (18,5 gal)	20 kg (44 lbs)	C890222
Humidification kit for Sweeper 150	/	/	140 l (37 gal)	40 kg (88 lbs)	C890225
Side brush for Sweeper 120 and 150		48 cm (18.9 in)	/	23 kg (51 lbs)	C890226

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
120													
150													

Very compatible


Compatible

Not compatible



LEAF VACUUM

<http://tiny.cc/leafvacuum>



FEATURES & BENEFITS

- **Powerful vacuum**
- **Rotary side brush**
- **5 m (16 ft) hand hose available**
- **Easy emptying thanks to hydraulic door opening from driver seat**

This attachment creates tremendous suction for collecting leaves, grass clippings, and other loose debris in parks, lawns, yards etc. The right rotary side brush extends the cleaning area. The leaf vacuum is equipped with a floating system and four adjustable wheels that allow to work well on uneven surfaces also. The suction mouth is made of plastic material that can absorb even small impacts.

The option hand held hose allows you to clean tight work areas, flower beds, along fences, and many other hard-to-reach locations.

The leaf vacuum is equipped with a hydraulically opening door on the box floor for easy disposal of the collected debris into a container, trailer, etc.. It requires low maintenance and cleaning is quick and easy.

Note: suggested floating boom valve on machine.

[illegible]

	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Compatibility													
						Very compatible			Compatible			Not compatible	

WEED BRUSH

<http://tiny.cc/weedbrush>


FEATURES & BENEFITS

- Brush with steel bristles
- Powerful hydraulic motor
- Manual angle adjustment

A hydrostatic drive motor, adjustable tilt, and a specially designed brush are combined to create an effective system to remove weed and plant growth for pavement joints.

The brush angle adjustment allows easy cleaning along walkway edges or along and in wall areas.

The weed brush is an effective tool for cleaning walkways, bike paths, car parks, school yards, general sweeping and even frozen ice and snow, making this a very flexible addition to your maintenance fleet.

It is equipped with a safety guard to prevent the projection of objects. The brush sticks out of the right side of the machine.

Note: suggested floating boom valve on machine.



Model	Brush diameter	Weight	Code
Weed brush 45	45 cm (17.7 in)	75 kg (165 lbs)	C890271
Weed brush 75	75 cm (29.5 in)	84 kg (185 lbs)	C890270

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Weed brush 45													
Weed brush 75													

Very compatible

Compatible


Not compatible

<http://tiny.cc/debrisblower>



A blue and silver snow blower attachment is shown mounted on the front of a tractor. The snow blower has a large, silver, conical discharge chute at the front. The main body is blue with a black mesh guard over the internal auger mechanism. It is connected to the tractor's PTO (Power Take-Off) shaft. The tractor's front wheel and suspension are partially visible on the right side of the image.

This blower delivers superior productivity and greater efficiency in jobs ranging from cleaning sidewalks, streets, car parking and other maintained paved areas, to blowing grass clippings, leafs, snow, sand or other debris off fairways or greens. Short rectangular nozzle is standard and several nozzles are also available as option.

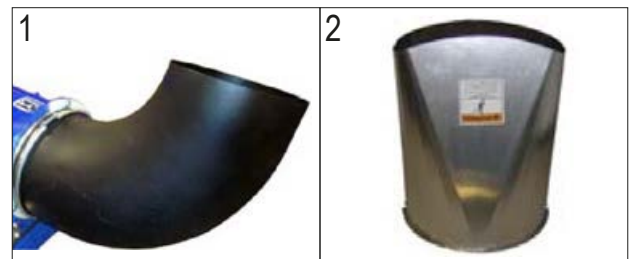

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very incompatible	Incompatible	Incompatible	Incompatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Incompatible	Incompatible

Very incompatible Incompatible Compatible Not compatible

SOLAR PANEL WASHER

<http://tiny.cc/solarpanelwasher>



FEATURES & BENEFITS

- Large autonomy
- Non scratch bristles
- Tiltable


The MultiOne solar panel washer is designed to clean photovoltaic solar panels and to help maintain and optimize the performance.

By utilizing the solar panel washer and performing regular cleaning and maintenance are crucial to ensure your solar panels are not losing up to 17% – 25% of power generation due to the accumulation of dirt, dust, and other foreign matter.

The big rotary broom with soft bristle let you clean about 4,3 meter quickly, effective and without damage the solar panels. The solar panel washer can clean from 0,7 MW/h to 2 MW/h depending on surface type.

The spray bar is equipped with 7 changeable nozzles. Large autonomy is assured by the big tank (500 l / 132 gal) and low water consumption bristles: 270 l/h, 400 l/h or 550 l/h based on the nozzles used between the 3 standard types. The rotary broom can be rotated to allow easy and quick cleaning of many rows of solar panel array. The machine must be equipped with the rear electric socket to feed the water tank pump.

Note: The use on solar panel washer of rear weights C883077 is suggested.

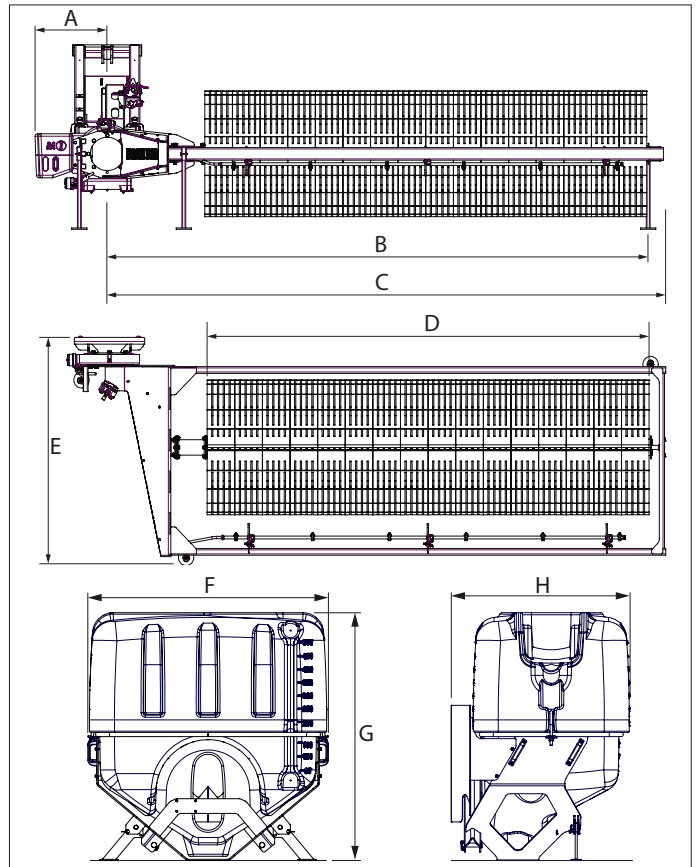

	Dimensions							
	A	B	C	D	E	F	G	H
cm	57	510	522	430	170	116	120	86
in	23	201	206	170	67	46	48	34

Model	Brush Length	Tank capacity	Rotation angle	Weight	Code
Solar panel washer	430 cm (170 in)	/	360°	440 kg (970 lbs)	C891292
Tank	/	500 l (132 gal)	/	130 kg (287 lbs)	C891286
Rear weights	/	/	/	160 kg (353 lbs)	C883077

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible Compatible Not compatible

ROTARY SWEEPER

<http://tiny.cc/rotarybroom>


FEATURES & BENEFITS

- Remotely controlled hydraulic angle adjustment
- Long lasting bristle material
- Equipped with extendable supports for storage: nylon brush doesn't get damaged during storing
- Direct drive transmission, low maintenance

Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farm yards or warehouses, you can rely on the rotary broom to get the job done right.

The brush can be hydraulically tilted 30° both on the right and on the left comfortably from the driver's seat. There are two adjustable wheels that keep the height of the brush constant from the ground and an elastic joint able to absorb small shocks avoiding possible damage.

The sweeper is equipped with supports which can be extended when the sweeper is not in use, so that the sweeper rests on the supports and the nylon brush doesn't get damaged during storage. Combined with a MultiOne machine with fully cab is the ideal attachment for the autumn and winter maintenance. **Note: suggested floating boom valve on machine.**



Model	Brush Diameter	Brush Material	Brush Width	Brush Width at Max Angle	Weight	Code
130	60 cm (23.6 in)	nylon	130 cm (51.2 in)	113 cm (44.5 in)	160 kg (353 lbs)	C890241
160	60 cm (23.6 in)	nylon	160 cm (63 in)	139 cm (54.7 in)	190 kg (419 lbs)	C890242

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
130													
160													


Very compatible

Compatible

Not compatible



SNOW BLADE

<http://tiny.cc/snowblade>


FEATURES & BENEFITS

- Efficient on larger areas, but compact enough to clear smaller spaces
- Shock absorbing system
- 30° Slewing angle

An excellent tool to quickly clear light or moderate snow from sidewalks and driveways. Equipped with shock absorbing system that allows the blade to trip forward when an obstacle is encountered, saving wear and tear on the blade and MultiOne.

It is equipped with a plastic edge that once worn out can be reversed or replaced. The blade can be hydraulically tilted 30° both to the right and to the left comfortably from the driver's seat. It is equipped with supports which can be extended when the attachment is not in use. It can be used also to move light materials such as grains or sawdust. In winter, installed on a MultiOne machine with a fully enclosed cab, it is a winning choice.

Note: suggested floating boom valve on machine.



Model	Width	Blade height	Slewing angle	Blade Width at Max Angle	Weight	Code
140	140 cm (55 in)	53 cm (20.8 in)	±30°	121 cm (47.6 in)	121 kg (267 lbs)	C891303
180	180 cm (71 in)	58 cm (22.8 in)	±30°	156 cm (61.4 in)	170 kg (375 lbs)	C891304
210	210 cm (83 in)	70 cm (27.6 in)	±30°	182 cm (71.6 in)	191 kg (421 lbs)	C891305

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
140													
180													
210													



Very compatible

Compatible

Not compatible



SNOW PLOW
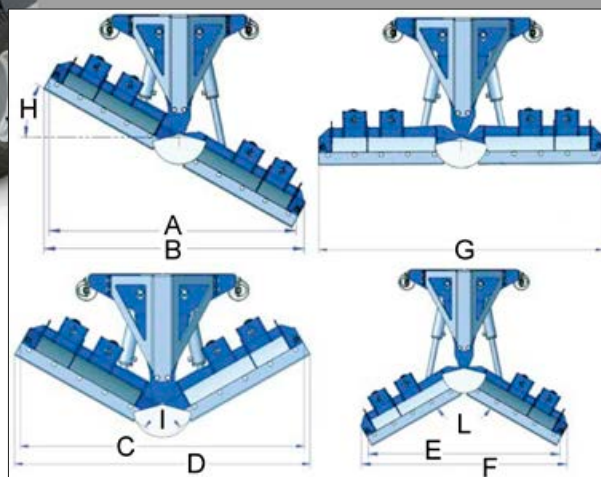
<http://tiny.cc/snowplow1>


FEATURES & BENEFITS

- Rugged professional grade snow plow
- 5 configurations
- Two independently controllable blades: can be adjusted in straight, V or Y position
- Advanced optional floating system allows working on uneven surfaces as well

MultiOne snow plow is a versatile attachment for snow removal. It consists of two independently hydraulically adjustable blades. Angle of the blades is be adjusted from the driver's seat. 5 different blade operating positions:

1) 30° right - 2) 30° left - 3) Straight - 4) Scoop "Y" - 5) V-plow. It is equipped with shock absorbing springs that allow the blade to trip forward when an obstacle is encountered. The optional floating system on the mounting bracket guarantees that the blade follows ground as well as possible. Support legs as standard while the extension wings are optional and increase the blade width.

Note: suggested floating boom valve on machine.

Dimensions (cm/in)										
Model	A	B	C	D	E	F	G	H	I	L
120-126	111 43.5	120 47	121 47.6	126 49.6	100 39.4	113 44.5	127 50	29°	121°	121°
150-170	147 57.7	153 60.2	157 61.8	157 61.8	136 53.5	149 58.7	169 66.3	29°	121°	121°
200-230	198 78	207 81.3	207 81.3	213 83.7	190 74.8	200 78.7	229 90	29°	121°	121°



C891320



C891326

Model	Blades Width	Blades height	Slewing angle	Weight	Code
120-126	120-126 cm (47.2-49.6 in)	75 cm (29.5 in)	±30°	320 kg (705 lbs)	C891301
150-170	150-170 cm (59-67 in)	75 cm (29.5 in)	±30°	350 kg (772 lbs)	C891302
200-230	200-230 cm (78.7-90.5 in)	75 cm (29.5 in)	±30°	420 kg (926 lbs)	C891310
Options					Code
Floating Adapter for Snow Plow					C891320
Extension Wings 25 + 25 cm (9.8 + 9.8 in) only for C891301 and C891302					C891326

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
120-126													
150-170													
200-230													

Very compatible

Compatible

Not compatible



SNOW BLOWER


<http://tiny.cc/snowblower>


FEATURES & BENEFITS

- Efficient two-stage snow blowers
- Heavy duty frame and transmission with replaceable cutting edge

The snow blower is an efficient method to remove large amounts of snow from sidewalks, roads, or other large areas when snow needs to be spread out evenly. The two-stage blower provides a powerful and efficient snow removal tool, even if the snow is wet and heavy. To achieve this efficiency, the auger breaks up the snow and the fan throws the snow out of the discharge chute. The chute can be rotated electrically 200° (±100°) and also the discharge chute height angle can be electrically adjusted from the operator's seat. It is equipped with adjustable skids, to set the working height, and a tool to remove snow blocks.

Note: suggested floating boom valve on machine.

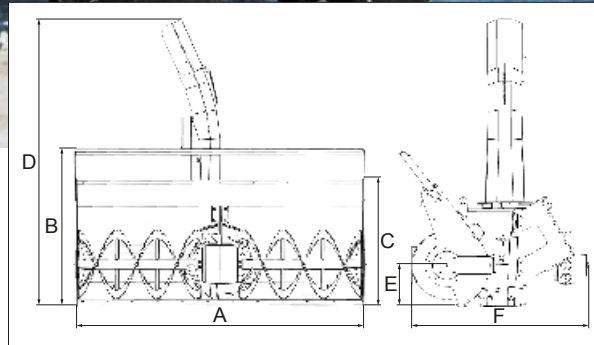

Dimensions (cm/in)						
Mod.	A	B	C	D	E	F
100	107/42	/	70/27.5	115/45.3	23/9	75/29.5
120	121/47.6	/	72/28.3	116/45.7	23/9	75/29.5
130	130/51.2	88/34.6	69/27.1	140/55	22.5/8.8	92/36.2
140	140/55	/	80/31.5	/	/	/
160	160/63	89/35	71/28	163/64.2	24/9.5	99/40
180	180/71	89/35	71/28	163/64.2	24/9.5	99/40

Model	Width	Chute rotation	Weight	Code
100	100 cm (39.4 in)	200° (±100°)	70 kg (154 lbs)	C890453
120	120 cm (47.2 in)	200° (±100°)	145 kg (320 lbs)	C890454
130 HD (Heavy Duty)	130 cm (51.2 in)	200° (±100°)	150 kg (331 lbs)	C890472
140	140 cm (55.1 in)	200° (±100°)	220 kg (485 lbs)	C890455
160 HD (Heavy Duty)	160 cm (63.0 in)	200° (±100°)	250 kg (551 lbs)	C890460
180 HD (Heavy Duty)	180 cm (70.9 in)	200° (±100°)	280 kg (618 lbs)	C890466


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
120													
130 HD													
140													
160 HD													
180 HD													

Very compatible

Compatible

Not compatible

SALT AND SAND SPREADER

<http://tiny.cc/saltspreader>


FEATURES & BENEFITS

- Fast and reliable attachment
- Rubber cover included
- 180° spread angle
- Available as either an attachment plate mount or as a towed unit.
- Multi sector limiter available for more precise spreading
- The attachment plate mounted unit has a hydraulically powered spinner
- The tow behind units spinner plate is powered by an axle mounted planetary gear

This unit is an ideal winter time tool to spread ice control products on parking lots and pedestrian areas. The towed version, combined with a snow blade or a snow turbine, allows to clear snow and spread anti-ice products simultaneously. Can also be used in the warmer months to spread seed and fertilizer.

The discharge pattern is easily set with a lever adjusted professional spread limiter.



Model	Volume	Max load ⁽¹⁾	Max Spreading Width Granular	Max Spreading Width Crystalline	Weight	Code
Towed centrifugal ⁽²⁾	200 l (7 ft ³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	80 kg (176 lbs)	C890186
Centrifugal stainless steel	200 l (7 ft ³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	54 kg (119 lbs)	C890185

(1) verify the lifting capacity of the machine. (2) Trailer coupling is required.

Options

	Code
Professional stainless steel deflector	C890187

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Towed centrifugal													
Centrifugal stainless steel													


Very compatible

Compatible

Not compatible



DROP SPREADER

<http://tiny.cc/dropsreader>


FEATURES & BENEFITS

- Self-loading design.
- Adjustable stop springs for salt distribution, present throughout the entire length of the system.
- Distributor roller: the pegs are positioned in helical position to assure continuous and proportioned distribution.
- Protective netting: a protective metallic mesh net is fixed on the top of the salt loading vat.
- Internal mixer axle which breaks any frozen salt and prevents the salt from clogging up.

The drop spreader is designed for fast and efficient spreading. Front mounting allows loading from ground level in the same way as with normal bucket. Powered by hydraulic motor and equipped with a mixer axle which breaks any frozen salt and prevents the salt from clogging up. It is ideal to spread salt or sand on parking lots, sidewalks, bicycle lanes and pedestrian areas.



Model	Volume*	Width	Spreading Width	Height	Weight	Code
110	470 l (16.6 ft ³)	125 cm (49.2 in)	110 cm (43.3 in)	100 cm (39.4 in)	270 kg (595 lbs)	C890189
130	580 l (20.5 ft ³)	145 cm (57 in)	130 cm (51 in)	100 cm (39.4 in)	330 kg (728 lbs)	C890188

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													
130													


Very compatible

Compatible

Not compatible



TRAILER

<http://tiny.cc/trailerrimorchio>


FEATURES & BENEFITS

- Robust and versatile dump trailers, ideal for earthmoving and other lighter duty jobs
- Manual or hydraulic tipping
- Removable sides

MultiOne trailers are useful for transporting garden waste, top soil, mulch, etc. Equipped with pintle a style hitch and parking brake. Available with either manual or hydraulic dump system.

- 600 model: manual rear tipping, foldable rear side, parking brake, support leg for parking.
- 1200 and 1500 model: hydraulic rear tipping, foldable side and rear sides, road lights with seven-pin standard plug, parking brake, third wheel for parking, two manual winches.

Attention: the loader must be equipped with the rear hydraulics outlet to drive the hydraulic tipping and with the trailer coupling.



Model	Max Load	Length	Width	Sides Height	Tipping	Wheels	Weight	Code
600	450 kg (992 lbs)	150 cm (59 in)	115 cm (45.3 in)	35 cm (13.8 in)	manual	16-6.50-8	150 kg (331 lbs)	C890770
1200	870 kg (1918 lbs)	200 cm (78.7 in)	140 cm (55.2 in)	35 cm (13.8 in)	hydraulic	185/70 R13	330 kg (728 lbs)	C890775
1500	980 kg (2160 lbs)	220 cm (86.6 in)	150 cm (59 in)	35 cm (13.8 in)	hydraulic	205/70 R15	520 kg (1146 lbs)	C890776

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
600													
1200													
1500													

Very compatible

Compatible

Not compatible



HIGH PRESSURE WASHER

<http://tiny.cc/highpressurewasher>


FEATURES & BENEFITS

- Efficient high pressure, self contained washer system
- Equipped with a hand held spray wand with a 10 m (33 ft) hose

High pressure washer is perfect for cleaning construction sites and general maintenance. The powerful 170 bar (2,465 psi) pressure jet cleans dirt, built up and dry mud, waxes, oils, grease, strips old paint, and more from any surface.

This pressure washer system, combined with the on-board 200 l (53 gal) water tank, makes cleaning buildings and graffiti removal an efficient process. It is possible to regulate the water pressure, the tank is equipped with an filter and a level indicator. The hand held spray has a adjustable nozzle to set the water jet width. Using the MultiOne's hydraulic power and portability, this self contained pressure washer system effectively works in remote locations where electricity or water are not available.



Model	Pressure	Volume*	Hydraulic power	Pipe length	Weight	Code
High pressure washer	170 bar	200 l (52.8 gal)	35 l/min (9.2 GPM)	/	75 kg (166 lbs)	C891200
Hand spray wand (included)		/	/	10 m (32.8 ft)	/	/

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible

MULTI1ONE


STAKE INSTALLER

<http://tiny.cc/stakeinstaller>


FEATURES & BENEFITS

- Efficient and time saving
- Powerful attachment

The stake installer attachment lets you use your MultiOne mini loader to rapidly drive stakes into the ground with minimal ground preparation. The specially designed tool holds a fence stake while a hydraulically powered vibratory hammer pounds the stake into the ground. The MultiOne boom enables the efficient handling of long stakes.

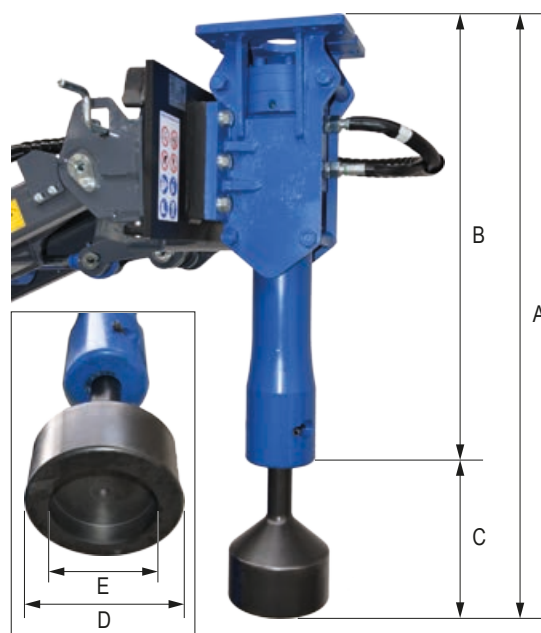

Dimensions					
	A	B	C	D	E
cm	98	74	24	18	12
in	38.6	29.1	9.5	7	4.7

Model	Impact energy	Impact rate	Ø Tool	Weight	Code
Stake installer	190 J	1000/1300 bpm	45 mm (1,8 in)	120 kg (265 lbs)	C890780

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible

AERIAL WORK PLATFORM

<http://tiny.cc/aerialworkplatform>


FEATURES & BENEFITS

- Safe and legal way to do building repairs, painting, light bulb changes etc.
- MultiOne carries the platform anywhere
- Independent from external power source
- The maximum allowed load on the basket is 120 kg and you are able to use the lift alone.

The MultiOne aerial work platform is attached to the MultiOne by the coupling plate. This makes it fast and easy to mount it on and take it off. Thanks to the small size and the maneuverability of MultiOne machines it is possible to reach even the most inaccessible work sites. This portable platform is suitable for building repairs, painting, light bulb replacement, general maintenance, and more. The safe working load for the aerial work platform is 120 kg (265 lbs), which makes it ideal for one man and plenty of tools. This platform is a cost effective system that enables reaching working heights up to 9,8 m (32 ft). The platform is equipped with four adjustable support legs for stabilization even on very rough and not perfectly flat surfaces. It can be operated either directly from the basket or from the ground (in case of emergency). There is a safety valve that can be operated to bring the basket back to the ground in the event of a power failure.



Model	Platform height	Lift Capacity	Basket size	Working height	Total dimensions	Weight	Code
PID 10	7,8 m (25,6 ft)	120 kg (265 lbs)	65x65 cm (25.6x25.6 in)	9,8 m (32 ft)	130x70 cm (51.2x27.5 in)	350 kg (772 lbs)	C895151

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Not compatible

STREET WASHER

<http://tiny.cc/streetwasher>


FEATURES & BENEFITS

- High water pressure
- The spray bars can be tilted up at 90°
- Includes a hand spray wand with 10 m (32 ft) hose on a storage reel
- High capacity tank

MultiOne Street Washer is the best solution for quickly cleaning public roads, town centers, car parks, market squares, large industrial areas, resort walkways, and wherever hygiene is required. The Street Washer combine low water consumption and high water flow and pressure. High pressure water takes dust, sand and debris out of asphalt, concrete and similar surfaces and doesn't therefore emit dust after drying. Low water consumption and high capacity tank make it possible to clean larger areas with a single pass. The Street Washer is equipped with two foldable nozzle bars for street cleaning and a hand held washing gun with 10 m (32 ft) hose. The tank is equipped with a level indicator, a filter and a small separate water tank with a tap useful for wash the hands.



Model	Spray Bar Width	Tank Capacity*	Water pressure	Nozzles	Hose Length	Weight	Code
300	150 cm (59 in)	300 l (79.2 gal)	150 bar	3	/	60 kg (132 lbs)	C890750
600	250 cm (98.4 in)	600 l (158.5 gal)	150 bar	5	/	75 kg (165 lbs)	C890751
Hand spray wand					10 m (32.8 ft)	/	included

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
300													
600													

Very compatible

Compatible

Not compatible




FLAIL MOWER WITH SIDE SHIFT

<http://tiny.cc/flailmowerside>



ACI ATTACHMENT CONTROL INTERFACE

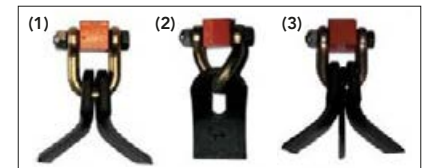

FEATURES & BENEFITS

- Hydraulic side shift and angle control flail mower
- Powerful attachment
- Equipped with direct drive hydraulic motor
- ACI: control all movements on a fingertip


Use this hydraulically powered flail mower with side shift for heavy shrubs and weeds, and see what it can do! Not only is its heavy duty construction, combined with the power and stability of the MultiOne, perfect for use on slopes, it's also perfect for mulching in parks and other hard to reach places. Features:

- 1) Standard in-line front flail mower.
- 2) Offset length (174 cm / 68.5 in).
- 3) To -45° angle ditch mower.
- 4) To +90° angle bank and hedge mower.

Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Notes: machine must be equipped with ACI.

Suggested floating boom valve on machine.

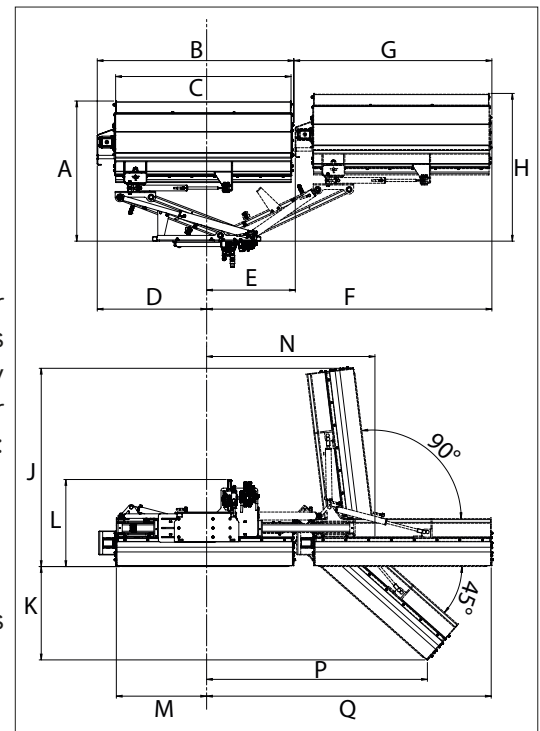

Dimensions (cm / in)															
Mod.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
110	123 48.4	128 50.2	109 42.9	96 37.8	78 30.6	205 80.9	174 68.4	130 51	129 51	53 20.7	76 30	79 31.2	148 58.1	159 62.7	215 84.6
125	123 48.4	143 56.1	124 48.8	96 37.8	78 30.6	220 86.8	174 68.4	130 51	144 56.8	63 24.6	76 30	79 31.2	148 58.1	170 67.1	230 90.5

Model	Cutting Width	Tools	Rotation Angle	Max Side Shift	Weight	Code
110	100 cm (39.4 in)	20	+90° / - 45°	174 cm (68.5 in)	277 kg (610 lbs)	C890785
125	115 cm (45.3 in)	24	+90° / - 45°	174 cm (68.5 in)	300 kg (662 lbs)	C890786

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													
125													

Very compatible

Compatible

Not compatible




FLAIL MOWER

<http://tiny.cc/flailmower1>



FEATURES & BENEFITS

- **Great cutting power**
- **Reliable and efficient**
- **Multifloat® floating system**
Flail mower models - improve cutting result and require less power from the engine and hydraulics:
 - Direct drive: hydraulic motor mounted directly on the shaft.
 - Multifloat® system - allows free vertical and orizzontal movement.
 - Bigger roller in the rear - better stability and less resistance when mowing.
 - Longer and wider skid shoes on the sides.

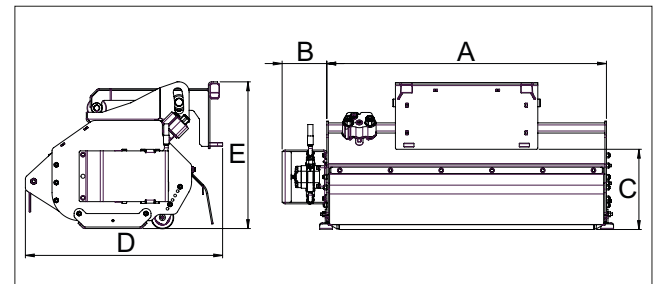

Dimensions (cm/in)					
Mod.	A	B	C	D	E
110	110 / 44	18 / 7	32 / 12.5	78 / 30.6	58 / 22.8
125	125 / 49	18 / 7	32 / 12.5	78 / 30.6	58 / 22.8
155	155 / 61	18 / 7	32 / 12.5	78 / 30.6	58 / 22.8

Flail mower is a drum-type cutter, intended for cutting of long grass, scrub, bush and similar vegetation. It will cut up to 20 mm thick tree branches with ease.

Flail mower is the optimal cutting device for places where you need a lot of cutting power and a rougher cut will do. The most common applications for flail mower are places with taller vegetation like meadows, road banks, yard areas etc.. This mower capitalizes on MultiOne's best in class hydraulic power to deliver top performance.

Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Note: suggested floating boom valve on machine.

Model	Cutting Width	Cutting Height	Tools	Weight	Code
110	100 cm (39.4 in)	2-10 cm (0.8-4 in)	20	122 kg (269 lbs)	C890617
125	115 cm (45.3 in)	2-10 cm (0.8-4 in)	24	145 kg (320 lbs)	C890618
155	145 cm (57 in)	2-10 cm (0.8-4 in)	32	162 kg (357 lbs)	C890619

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110													
125													
155													

Very compatible


Compatible

Not compatible



SIDE BOOM WITH FLAIL MOWER DZ1

http://tiny.cc/sideflailmower_dz1

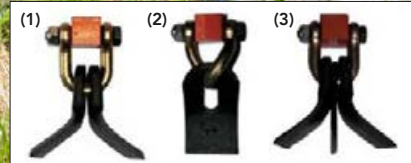


FEATURES & BENEFITS

- **Excellent visibility of to the whole working area**
- **Compact with long reach capabilities**

The side flail mower, combined with the power and stability of the MultiOne, makes it possible to reach places it is not safe to drive. This makes mowing side slopes, ditches, waterfronts, and other hard to reach areas safe and easy. Mowing road sides with the combination of a MultiOne and this mower is easier and more efficient than with larger machines.

The mower is equipped with proportional controls for smooth and exact movements of the boom and the flail mower. Compact size and low weight make it suitable for mounting also on the smaller MultiOne machines such as the 4 and 6 series. Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Note: suggested floating boom valve on machine.

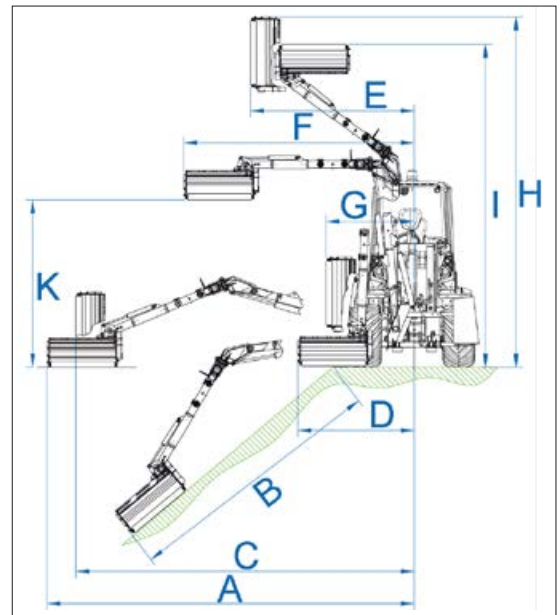

Dimensions (cm / in)										
Model	A	B	C	D	E	F	G	H	I	K
Flail mower 60	280 110	170 67	260 102	145 57	130 51	175 69	180 71	300 118	280 110	155 61
Flail mower 80	300 118	190 75	260 102	165 65	130 51	195 77	180 71	320 126	280 110	155 61

Boom Mower	Max. Extension	Cutting Width	Tools	Weight	Code
Boom mower DZ1 (*)	3 m (9.8 ft)	/	/	292 kg (644 lbs)	C890607
Flail mower 60 for boom	/	60 cm (23.6 in)	12	80 kg (176 lbs)	C890606
Flail mower 80 for boom	/	80 cm (31.5 in)	16	105 kg (232 lbs)	C890611

(*) C890611 or C890606 required

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Boom + 60 Flail mower													
Boom + 80 Flail mower													

Very compatible

Compatible

Not compatible



SIDE BOOM WITH FLAIL MOWER DZ2

<http://tiny.cc/sideflailmower>



FEATURES & BENEFITS


- Excellent visibility of to the whole working area
- Compact with long reach capabilities

MultiOne's side flail mower lets you reach the cutting head into waterfronts, ditches, steep slopes, and other hard to reach areas safely. This mower uses lets you choose between two flail mowers for tough brush.

The mower is equipped with proportional controls for smooth and exact movements of the boom and the flail mower. The DZ2 model is suitable for mounting on MultiOne machines, from series 7 to 10.

Y blades ⁽¹⁾ comes standard, it can be equipped with Paddle Blades ⁽²⁾ (C035307) or Verticut ⁽³⁾ (C035312 + Y blade).

Note: suggested floating boom valve on machine.

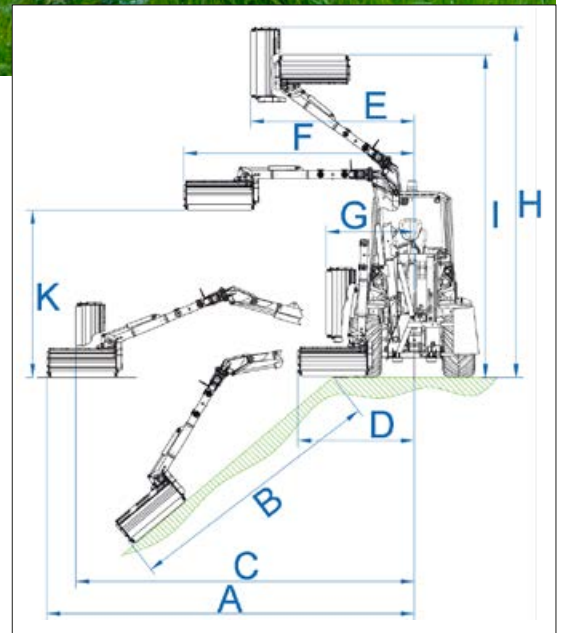

Dimensions (cm / in)										
Model	A	B	C	D	E	F	G	H	I	K
Flail mower 80	315 124	190 74.8	265 104.3	185 72.8	155 61	215 84.6	135 53.1	375 147.6	325 128	135 53.1
Flail mower 100	335 132	210 82.7	265 104.3	205 80.7	155 61	235 92.5	135 53.1	395 155.5	325 128	135 53.1

Boom Mower	Max. Extension	Cutting Width	Tools	Weight	Code
Boom mower DZ2(*)	3,35 m (11 ft)	/	/	486 kg (1072 lbs)	C890600
Flail mower 80 for boom	/	80 cm (31.5 in)	16	105 kg (232 lbs)	C890611
Flail mower 100 for boom	/	100 cm (39.4 in)	20	155 kg (342 lbs)	C890612

(*) C890611 or C890612 required

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Boom + 80 Flail mower													
Boom + 100 Flail mower													

Very compatible

Compatible

Not compatible



TORNADO LAWN MOWER

<http://tiny.cc/tornadolawnmower2>



FEATURES & BENEFITS

- Powerful lawn mower with internal clipping catcher
- Can also be used to collect tree leaves on lawns
- New floating system guarantees easy operation and good mowing result also on uneven lawns
- Low noise emissions and not dust
- Rounded edges - less damage to trees, buildings etc. in case of contact
- Automatic stop valve - stops the blades when the Tornado is lifted off the ground

Designed for professional level green space maintenance, the MultiOne Tornado mower with the internal clipping catcher effectively cuts dry and wet grass. Using the patented MultiOne Tornado, in a single pass you can cut, pick-up, and collect the clippings in the internal catcher with no noise or dust.

The blades of the mower crush the grass clippings, leaves etc. into a very fine material which then moves to the collector. The cutting waste is ideal material for composting. Collector capacity is as big as 250 litres, which enables cutting of small to medium sized areas. Emptying of the collector is very easy: lift the mower up from the ground with MultiOne's boom and then tilt the mower downward so much that the grass waste pushes the lid open and the waste comes out. The collector can be easily unloaded directly into a trailer. Thanks to its excellent suction power collecting of leaves from the lawns is also possible.

Note: suggested floating boom valve on machine.



Model	Cutting Width	Volume*	Cutting height	Blades	Weight	Code
Tornado 120	120 cm (47.2 in)	250 l (8.8 ft³)	1-12 cm (0.4 – 5 in)	3	210 kg (463 lbs)	C890643
Tornado 150	150 cm (59 in)	250 l (8.8 ft³)	1-12 cm (0.4 – 5 in)	3	220 kg (485 lbs)	C890647

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
120													
150													

Very compatible

Compatible

Not compatible



LAWN MOWER

<http://tiny.cc/lawnmower2>



FEATURES & BENEFITS

- Equipped with automatic stop valve
- Floating system guarantees easy operation and good mowing result also on uneven lawns
- Rear or side discharge as standard, mulching kit available as an option
- Four puncture free tires

Ideal for fine cut applications, such as golf courses and large acreage mowing. The mower has been designed with three blades (two blades on mod. 100) that cut with an overlap that prevents uncut strips.

MultiOne's extensive design experience makes the mower very reliable and assures a high quality cut. The independent four wheel support of the mower frame allows the mower deck to follow ground contours. It is equipped with the MultiOne floating system, which guarantees optimal touch with the ground also on uneven lawns. The mower is also equipped with a automatic stop valve which stops the blades when the mower is lifted off the ground. Moreover, thanks to the MultiOne telescopic boom, it is possible to cut the grass even under trees and bushes where the conventional mower could not reach. The mower mod. 100 is mulching type as standard. Mulching kit is available as an option on model 130, 150 and 180.

Note: suggested floating boom valve on machine.

Model	Width	Cutting Height	Weight	Code
Lawn mower 100 with mulching system	100 cm (39.4 in)	1-12 cm (0.4 – 5 in)	116 kg (256 lbs)	C895081
Lawn mower 130 with rear discharge	130 cm (51.2 in)	1-12 cm (0.4 – 5 in)	170 kg (375 lbs)	C890636
Lawn mower 150 with right side discharge	150 cm (59 in)	1-12 cm (0.4 – 5 in)	207 kg (457 lbs)	C890632
Lawn mower 180 with left side discharge	180 cm (70.8 in)	1-12 cm (0.4 – 5 in)	240 kg (529 lbs)	C890638
Options				
Mulching kit for lawn mower 130			20 kg (44 lbs)	C890631
Mulching kit for lawn mower 150			21 kg (47 lbs)	C890633
Mulching kit for lawn mower 180			25 kg (55 lbs)	C890635

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100													
130													
150													
180													

Very compatible


Compatible

Not compatible



SPIKE AERATOR

<http://tiny.cc/spikeaerator>



FEATURES & BENEFITS

- Quick and efficient operation
- Suitable for sandy or loamy soils
- Equipped with knife type blades

The spike aerator is completely mechanical and it cuts and penetrates the ground surface using the wedge shaped spikes. The cut slots enable air, fertilizer, and water to effectively reach the lawn roots in sandy or loamy soils. The open slots quickly close after water causes the compacted soil to expand.

Spike penetration depth is easily controlled using the two guide wheels, providing consistent results.

The spike aerator is also equipped with mechanical support legs which lift the blades off the ground for storage.

It is the ideal attachment for gardens and sports fields maintenance where MultiOne machines, thanks to their traction system, don't damage the turf.

Note: suggested floating boom valve on machine.




Model	Working Width				Max Working Depth				Weight				Code
Spike Aerator	130 cm (51.2 in)				10 cm (4 in)				300 kg (662 lbs)				C890446
Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
<div> <div></div> <div></div> <div></div> </div>													
<div> <div>Very compatible</div> <div>Compatible</div> <div>Not compatible</div> </div>													



CORE AERATOR

<http://tiny.cc/coreaerator>



FEATURES & BENEFITS

- Holes stay open for a long time
- Suitable for heavy clay soils

The core aerator penetrates the ground pulling plugs of grass and soil from the ground, leaving the plugs behind. The holes created enable air, fertilizer, and water to effectively reach the lawn roots in heavy clay soils.

Core aerator penetration depth is easily controlled using the two guidewheels, providing consistent results.

The spike aerator is also equipped with mechanical support legs which lift the blades off the ground for storage.

It is the ideal attachment for gardens and sports fields maintenance where MultiOne machines, thanks to their traction system, don't damage the turf.

Note: suggested floating boom valve on machine.



Model	Working Width	Max Working Depth	Weight	Code
Core Aerator	130 cm (51.2 in)	10 cm (4 in)	300 kg (662 lbs)	C890445

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible


Compatible

Not compatible



HEDGE CUTTER


<http://tiny.cc/hedgecutter>



FEATURES & BENEFITS

- Cut angle electrically adjustable
- Time saving attachment
- Very high cutting quality
- Cutting bar is suitable for cutting fine leaves, as well as heavy growth

The hedge cutter is the perfect attachment for hedge cutting. The combination of the cutters arm angle adjustment and the MultiOne's boom reach provides excellent reach. Through using the speed and flexibility of the MultiOne, cutting straight hedge profiles is quick and easy. Cutting bars available with 1 cm (0.4 in) or 3 cm (1.2 in) max. cutting branches diameter. Max. side shift 45 cm (17.7 in).

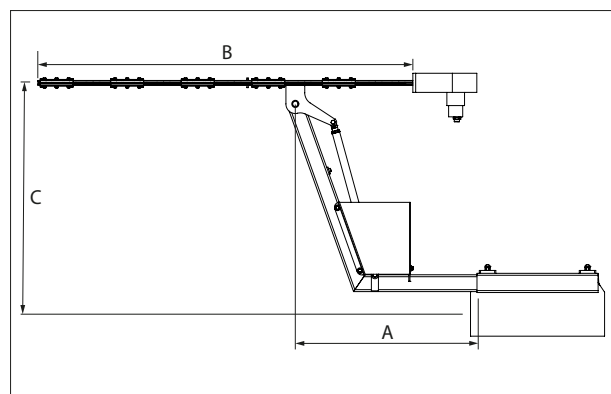

Mod.	Dimensions (cm/in)			
	A (min)	A (max)	B	C
10 - 160	35/13.8	80/31.5	160/63	100/39
30 - 160	35/13.8	80/31.5	160/63	100/39
10 - 210	35/13.8	80/31.5	210/83	100/39

Model	Hedge cutter length	Max. cutting diameter	Slewing angle	Weight	Code
Frame only (C890666, C890667 or C890668 required)	/	/	/	47 kg (104 lbs)	C890665
Hedge cutter 10 - 160 (C890665 required)	160 cm (63 in)	1 cm (0.4 in)	120°	34 kg (75 lbs)	C890666
Hedge cutter 30 - 160 (C890665 required)	160 cm (63 in)	3 cm (1.2 in)	120°	40 kg (88 lbs)	C890667
Hedge cutter 10 - 210 (C890665 required)	210 cm (83 in)	1 cm (0.4 in)	120°	44 kg (97 lbs)	C890668

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Hedge cutter 10 - 160													
Hedge cutter 30 - 160													
Hedge cutter 10 - 210													

Very compatible


Compatible

Not compatible



SICKLE BAR MOWER

<http://tiny.cc/sicklebarmower1>



FEATURES & BENEFITS

- Robust and economical long hay cutter
- Compact dimensions
- Cost effective
- Fast

The MultiOne hydraulically powered sickle bar mower has been designed to quickly and effectively cut long grasses and hay on fields, meadows, and road banks.

Thanks to its small size it is easily transportable and can be used in hard-to-reach areas.

It is equipped with two blades, one fixed and one mobile.

The sickle bar mower is ideal for cutting these grasses which can be harvested in a secondary process.

It is equipped with two adjustable skids to set the cutting height.

Note: suggested floating boom valve on machine.



Model	Width	Weight	Code
145	145 cm (57 in)	83 kg (183 lbs)	C890653
165	165 cm (65 in)	93 kg (205 lbs)	C890654

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
145													
165													

Very compatible

Compatible

Not compatible



LANDSCAPE POT CLAMP

<http://tiny.cc/vaseclamp>




FEATURES & BENEFITS

- The easiest way to lift and transport potted or balled plants, trees, barrels, and more without causing damage.
- Excellent tool for nurseries and landscapers

The MultiOne pot clamp is designed to lift and transport round objects, such as potted or balled plants and trees, barrels, and more without causing damage.

Grabbing force can be adjusted by a valve, which means all kinds of objects can be handled without damaging them.

It is the ideal attachment for the nurseryman who, thanks to the small size of the Multione machine, can transport both the plant pots and the machine on the truck or trailer to make the unloading at the delivery place simply and quickly.

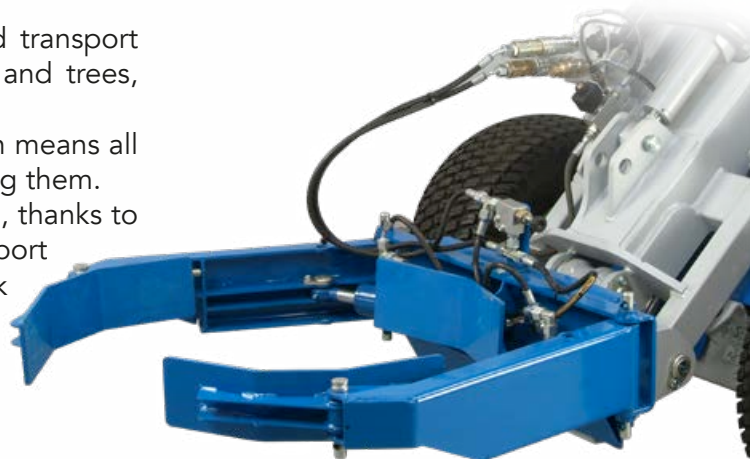

Model	Max load	Min Opening	Max Opening	Weight	Code
Landscape pot clamp	650 kg (1433 lbs)	25 cm (9.8 in)	120 cm (47.2 in)	80 kg (176 lbs)	C890721

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

Very compatible



Compatible

Not compatible



TELESCOPIC SIDE ARM M1-15

<http://tiny.cc/sidearmm1-15>

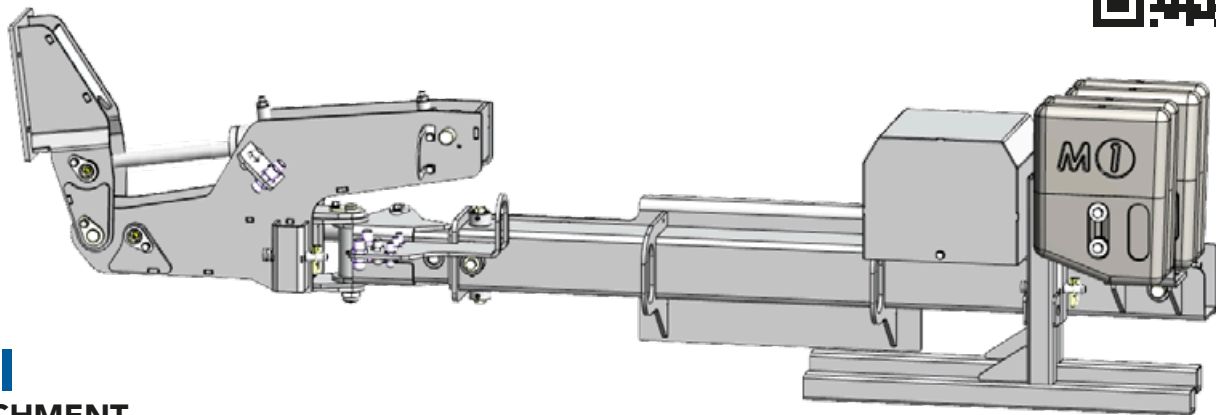

ACI ATTACHMENT CONTROL INTERFACE

FEATURES & BENEFITS


- Outreach to side up to 3,72 m
- Easy mowing or trim on the right side
- ACI: control all movements on a fingertip

The telescopic side arm is equipped with a straight telescopic arm and a tilting jib arm. The telescopic arm extends 1,05 m hydraulically to the side, and the jib arm movement is 45° down and 90° up from the horizontal position.

The attachment, mounted on the side arm, will give in backward when it hits an obstacle. The side arm will come back to normal position as soon as the obstacle is out of the way.

MultiOne rear side weight C883077 it is necessary.

Note: machine must be equipped with ACI

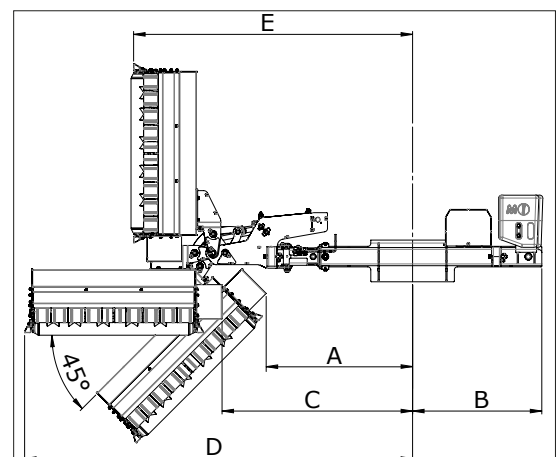

Dimensions (cm / in)

	C890612	C890950
A	98-203 / 38.5-80	102-207 / 40-81.581.5
B	87 / 34.5	87 / 34.5
C	128-233 / 50.5-91.5	117-222 / 46-87.5
D	260-365 / 102.5-143.5	267-372 / 105-146.5
E	187-292 / 73.5-115	162-267 / 64-105

Model	Max. Offset	Cutting Width	Max. cutting diameter	Tools	Weight	Code
Telescopic Side Arm M1-15 (*)	105 cm (41.5 in)	/	/	/	250 kg	C890551
Branch cutting bar 150 (**)	/	150 cm (59 in)	5 cm (2 in)	/	155 kg (342 lbs)	C890950
Flail mower 100 (**)	/	100 cm (39.4 in)	2 cm (0.8 in)	20	155 kg (342 lbs)	C890612
Options						
Rear side weights 160 kg	/	/	/	/	160 kg (352 lbs)	C883077

(*) C890950 or C890612 required

(**) C890551 and C883077 required

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
M1-15 with:													
Branch cutting bar 150													
Flail mower 100													

Very compatible

Compatible

Not compatible



ARTICULATED SIDE ARM M1-30

<http://tiny.cc/sidearmm1-30>



ACI
ATTACHMENT
CONTROL
INTERFACE


FEATURES & BENEFITS

- Cut on either side
- Four cutting options
- ACI control: all movements on a fingertip

Compact, light and maneuverable, the articulated side arm M1-30 has been designed for contractors, municipalities and estate managers working in landscape and ground-care sectors. From grass cutting to tree trimming the articulated side arm M1-30 can do it all thanks to the different end tools like Hedge cutter, Hedge trimmer and Flail mower.

It's the ideal reach mower to operate in very narrow spaces for hedge trimming or mowing with the freedom to cut on either side of the MultiOne compact loader.

Note: machine must be equipped with ACI

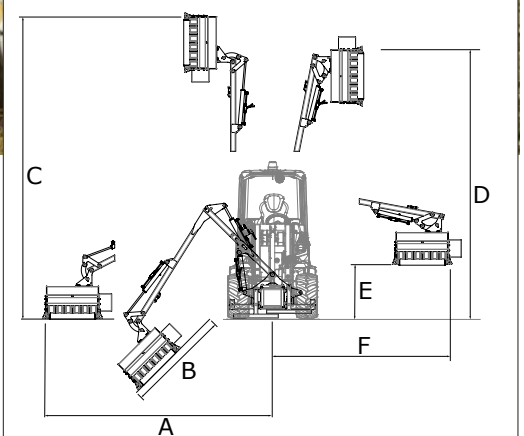

Dimensions (cm / in)

	C890666/7	C890671	C890606
A	403 / 158.5	377 / 148.5	309 / 121.5
B	230 / 90.5	204 / 80.5	136 / 53.5
C	504 / 198.5	478 / 188	410 / 161.5
D	365 / 143.5		
E	115 / 45.5	73 / 28.5	
F	241 / 95		

Model	Max. Extension	Cutting Width	Max. cutting diameter	Tools	Weight	Code
Articulated Side Arm M1-30(*)	3 m (9.8 ft)	/	/	/	292 kg (644 lbs)	C890940
Hedge cutter 10 - 160(**)	/	160 cm (63 in)	1 cm (0.4 in)	/	34 kg (75 lbs)	C890666
Hedge cutter 30 - 160(**)	/	160 cm (63 in)	3 cm (1.2 in)	/	40 kg (88 lbs)	C890667
4 Heads 140 Trimmer(**)	/	140 cm (55 in)	/	/	/	C890671
Flail mower 60 (**)	/	60 cm (23.6 in)	2 cm (0.8 in)	12	80 kg (176 lbs)	C890606

(*) C890666 or C890667 or C890671 or C890606 required (**) C890940 required

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
M1-30 with:													
Hedge cutter 10 - 160													
Hedge cutter 30 - 160													
4 Heads 140 Trimmer													
Flail Mower 60													

Very compatible


Compatible

Not compatible



SPRAYER

<http://tiny.cc/sprayer>



FEATURES & BENEFITS

- Fast application for large areas
- Flow and pressure adjustable
- Foldable spray bar
- Equipped with a hand held spray wand with a 50 m (165 ft) hose

The hydraulically powered MultiOne sprayer is the proper attachment for the fast and efficient application of landscaping chemicals. **NOTE: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.**

The foldable 4,5 m (14.75 ft) wide spray bar, combined with the 120 l (31.7 US gal) tank allow for fast coverage of large areas. Spray nozzles are replaceable and adjustable to assure the proper material application, making this system ideal for landscape and grass area maintenance.

This unit comes standard with a 50 m (165 ft) hose reel with an application wand and nozzle. It is also possible to reach the most inaccessible places, such as the tree tops. System pressure and flow are adjustable to meet application requirements. There are a filter and a small separate water tank with a tap useful to wash the hands.



Model	Capacity*	Max Pressure	Spraying Bar Width - Opened	Spraying Bar Width - Closed	Hose reel	Weight	Code
Sprayer	120 l (31.7 gal)	40 bar	450 cm (177.2 in)	150 cm (59 in)	50 m (164 ft)	65 kg (144 lbs)	C890740

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible



STRING SHOOT REMOVER


<http://tiny.cc/shootremover>


FEATURES & BENEFITS

- Low wear cutter string
- Variable offset (+-25 cm)
- Efficient and reliable

The MultiOne shoot remover is an ideal tool for the removal of weeds and plant shoots from around trees. Hydraulically powered, it gently removes the shoots without causing tree trunk damage.

The shoot remover frame can be offset to the right to allow for variable working conditions. Replacement of the long lasting rubber strings is quick and easy.

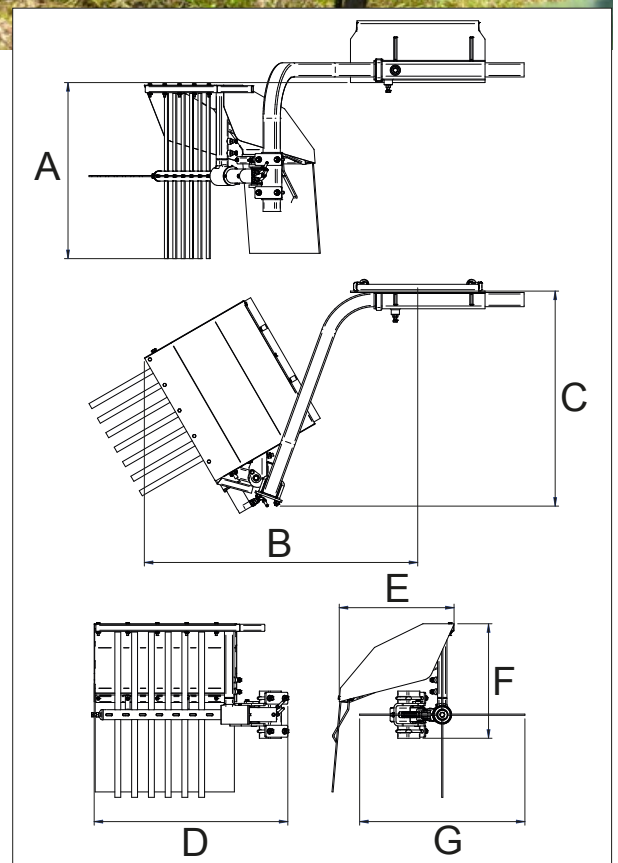

Dimensions (cm/in)						
A	B	C	D	E	F	G
75	116	91	82	49	49	70
29.4	45.7	35.8	32.3	19.3	19.3	27.6

Model	Rotor Length	Offset Max	Weight	Code
String shoot Remover	52 cm (20 in)	141 cm (55.5 in)	50 kg (110 lbs)	C890436

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible

MULTI1NE

DUAL BLADE HEDGE TRIMMER


<http://tiny.cc/Vineyardtrimmer>


FEATURES & BENEFITS

- Dual cutting action saves time
- Completely adjustable
- Easy to control

The hydraulically powered dual blade hedge trimmer allows the top and sides of vine rows and large plants to be cut simultaneously. Each frame and cutter assembly is independently adjustable, and the MultiOne's boom provides additional flexibility and control. The inclination of the horizontal cutting bar can be adjusted manually and there is an electric actuator which allows the simultaneous adjustment of the inclination of both cutting bars directly from the driver's seat. It is equipped with support legs to position it during periods of non-use.

The frame can be offset to the right (max. 40 cm - 15.7 in) to allow for variable working conditions.

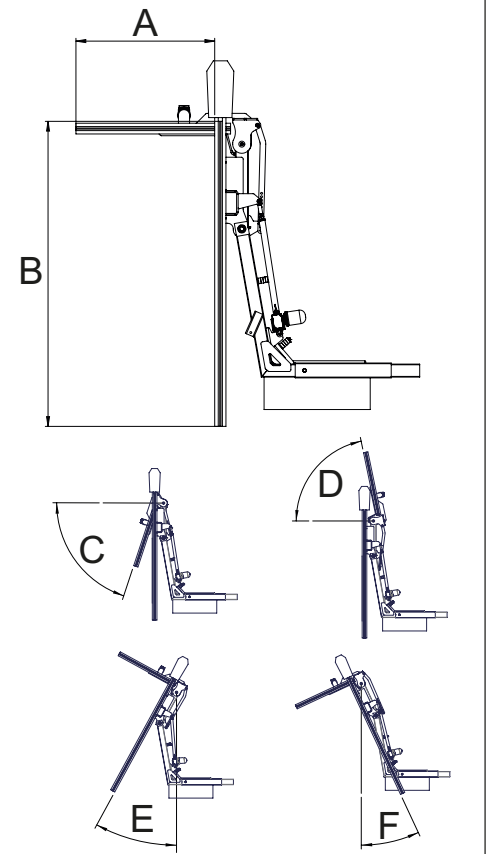

Dimensions (cm/in)					
A	B	C	D	E	F
74 29	160 63	71°	78°	28°	25°

Model	Vertical Bar Length	Horizontal Bar Length	Max Right Side Shift	Max. cutting diameter	Weight	Code
Double Blade Hedge Trimmer	160 cm (63 in)	74 cm (29,1 in)	40 cm (15.7 in)	1 cm (0.4 in)	160 kg (353 lbs)	C890441

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

INTER-ROW MOWER


<http://tiny.cc/interrow>


FEATURES & BENEFITS

- Spring shock absorber system
- Abrasion resistant guard
- Floating system

The inter-row mower is designed to cut grass and shrubs around trees, guard rails, traffic signs, and other obstacles. The floating mower system allows the mower disk to automatically follow ground contours. This system provides excellent productivity and an even cut. The inter-row mower disk can be offset to the right to allow for variable working conditions. It is equipped with a hydraulic valve that prevents blades rotation inversion.

Note: suggested floating boom valve on machine.

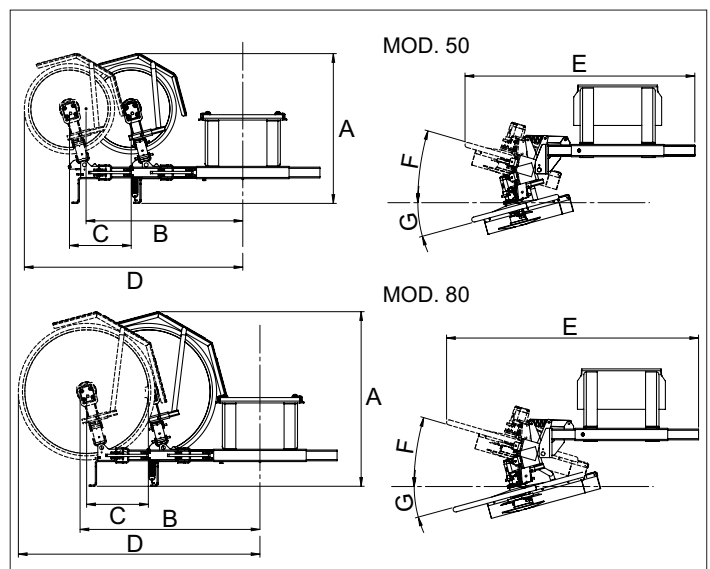

Dimensions (cm/in)							
	A	B	C	D	E	F	G
Mod. 50	97 38.2	102 40	40 15.7	142 55.7	149 58.6	16°	15°
Mod. 80	113 44.6	117 45.9	40 15.7	157 61.6	163 64.3	16°	15°

Model	Mowing disk diameter	Max Side Shift	Nr. Blade	Weight	Code
50	48 cm (18.9 in)	40 cm (15.7 in)	2	108 kg (238 lbs)	C890705
80	80 cm (31.5 in)	40 cm (15.7 in)	2	115 kg (254 lbs)	C890706


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
50													
80													

Very compatible

Compatible

Not compatible

STAINLESS STEEL TIPPING DUMPER

<http://tiny.cc/tippingdumper>


FEATURES & BENEFITS

- High capacity
- For fruit and vegetables
- Hydraulic dumping

The MultiOne stainless steel tipping dumper is designed for grape, fruit, and vegetable transportation. Two hydraulic cylinders tip the container for unloading into trucks or boxes. Using the MultiOne's boom, the tipping dumper can reach almost any dumping position. The tipping dumper is also equipped with mechanical support legs which lift the dumper off the ground for storage.



Model	Max Load*	Width	Weight	Code
Stainless steel Tipping Dumper	400 kg (882 lbs)	120 cm (47,3 in)	180 kg (397 lbs)	C890430

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

Very compatible

Compatible

Not compatible

VINEYARD SPRAYER

<http://tiny.cc/vineyardsprayer>


FEATURES & BENEFITS

- High pressure, hydraulically powered pump
- Polyethylene tank
- Clean water tank for hand washing

The Vineyard Sprayer is a versatile sprayer suitable for vineyard spraying, weed-killing in open-field growing, inter-row weed-killing.

The spray bars can be rotated and adjusted in height. The nozzles are specifically designed to spray efficiently and without product waste. The high capacity tank is equipped with a level indicator and allows long work sessions without the need to stop for refueling. The pressure is adjustable and there is an anti-clogging filter and a small separate water tank equipped with a tap, useful for washing hands.

Note: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.


Model	Tank Capacity*	Nozzles	Max Pressure	Weight	Code
Vineyard Sprayer	200 l (52.8 gal)	4+4	40 bar	90 kg (198 lbs)	C890741

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Not compatible



VINEYARD TOOL CARRIER


<http://tiny.cc/toolcarrier>


FEATURES & BENEFITS

- Multifunction tool
- 6 professional attachments for vineyards
- Suitable for rows from 200 cm (6.5 ft) wide

MultiOne's vineyard tool carrier is a multifunctional tool carrier for a wide range of vineyard attachments.

This tool carrier for vineyard is equipped with an electro-hydraulic distributor with 4 functions (roll back / tilt head / side extension / height) operated through a joystick positioned in the operator's cab. An hydraulic system roll the tool back to avoid damages to plants. **Note: suggested floating boom valve on machine.**

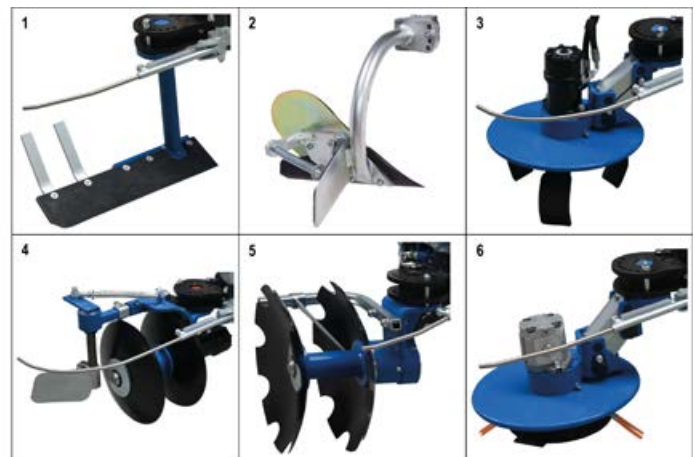

Model	Diameter /Blade Length	Min. Row Width	Weight	Code
Vineyard tool carrier (base machine)	/	200 cm (78.74 in)	220 kg (485 lbs)	C890760
1 Blade Weeder (*)	50 cm (19.68 in)	/	25 kg (55 lbs)	C890763
2 Plough roots bare blade (*)	26 cm (10.23 in)	/	25 kg (55 lbs)	C890766
3 Power Harrow unit 4 blades (*)	40 cm (15.74 in)	/	35 kg (77 lbs)	C890761
4 Disk roots bare (*)	36 cm (14.17 in)	/	30 kg (66 lbs)	C890764
5 Disk roots prop (*)	46 cm (18.11 in)	/	30 kg (66 lbs)	C890765
6 Disk Mower, blades and wires (*)	40 cm (15.74 in)	/	35 kg (77 lbs)	C890762

(*) C890760 required

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible



LEVELER

<http://tiny.cc/leveller>


FEATURES & BENEFITS

- Economical attachment to level gravel and other soils
- Eliminates almost all manual shoveling and grading at job sites

A simple and inexpensive but incredibly useful and efficient attachment for levelling and planing of larger areas. With MultiOne leveller you can easily and quickly level sand, mulch etc. The leveller is most commonly used in:

- Preliminary lawn bed levelling
- Yard sand levelling
- Driveway levelling

The leveller can also be used for lifting job site light materials like sod rolls, tools etc.



Model	Width	Length	Weight	Code
Leveler	150 cm (59 in)	105 cm (41.3 in)	130 kg (287 lbs)	C890100



Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Red	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

Very compatible

Compatible

Not compatible

ROLLER
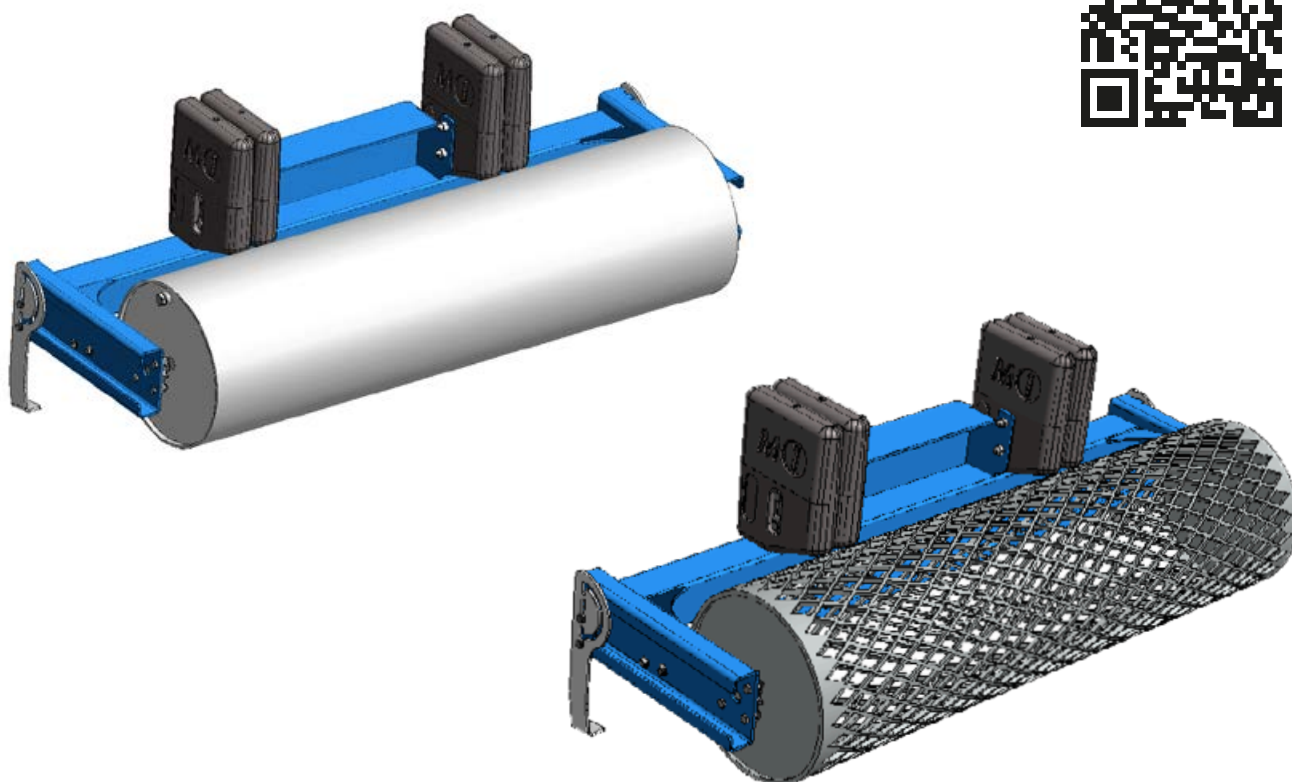
<http://tiny.cc/m1roller>


FEATURES & BENEFITS

- Perfect attachment to compact soils
- Weights can be added to increase compaction
- Two models: mesh and fillable

A simple and inexpensive but incredibly useful and efficient attachment for levelling and compacting of larger areas.

With MultiOne roller you can easily and quickly level sand, mulch etc.

The roller is most commonly used in:

- Preliminary lawn bed levelling and compaction;
- Yard sand compaction;
- Driveway levelling and compaction.

Model	Volume	Working Width	Weight	Code
Plain roller fillable	178 l (47 gal)	150 cm (59 in)	165 kg (364 lbs)	C890930
Mesh roller	/	152 cm (59.8 in)	170 kg (375 lbs)	C890931
Options				
Rear side weights 160 kg	/	/	160 kg (352 lbs)	C883077

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Plain roller fillable													
Mesh roller													

Very compatible

Compatible

Not compatible



ROTARY TILLER


<http://tiny.cc/rotarytiller>


FEATURES & BENEFITS

- Reliable, heavy duty
- Adjustable soil scraper blade
- Adjustable working depth

The heavy duty MultiOne rotary tiller is the ideal tool for preparing the soil for seeding or planting, even in tough conditions and hard soils. In one pass, the hydraulically powered tiller breaks up the soil, weeds and scrub growth are uprooted, and the soil is leveled.

The solid frame and the chain transmission ensure durability and reliability. The small dimensions combined with the agility of the MultiOne machines make it an ideal attachment for narrow spaces. **Note: suggested floating boom valve on machine.**

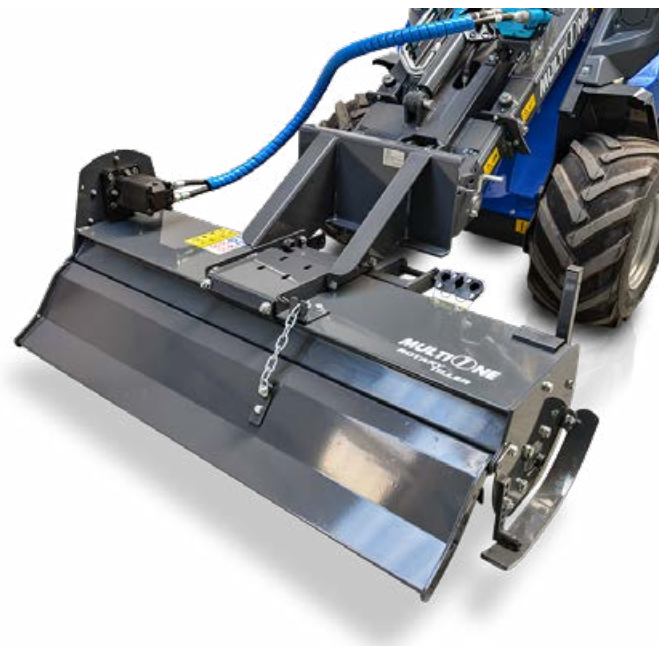

Model	Working Width	Working depth	Blades	Weight	Code
105	105 cm (41.3 in)	0 - 15 cm (0- 6 in)	20	140 kg (309 lbs)	C890490
125	125 cm (49.2 in)	0 - 15 cm (0- 6 in)	24	150 kg (331 lbs)	C890491
145	145 cm (57 in)	0 - 15 cm (0- 6 in)	28	160 kg (353 lbs)	C890492

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
105													
125													
145													

Very compatible

Compatible

Not compatible



POWER HARROW

<http://tiny.cc/powerharrow>


FEATURES & BENEFITS

- Professional, efficient rotary harrow for topsoil levelling
- Top grade finish with just one pass
- Can be equipped with seeding unit - ready lawn surface in a single pass

MultiOne power harrow is an excellent leveler for lawn beds, yards, gardens etc. – for places where the ground needs to be perfectly levelled. It harrows only the topsoil and gives a very nice finish for sowing. Working depth is adjusted with the rear field roller which levels the seeding bed during operation. With the optional seeding unit you are able to make a ready lawn surface on one pass. Power harrow is most commonly used for lighter topsoil levelling.

Note: suggested floating boom valve on machine.

Model	Working Width	Working Depth	Blades	Weight	Code
110 w/roller	110 cm (43.3 in)	0 - 18 cm (0- 7 in)	10	211 kg (465 lbs)	C890520
130 w/roller	130 cm (51.2 in)	0 - 18 cm (0- 7 in)	12	226 kg (498 lbs)	C890521
150 w/roller	150 cm (59 in)	0 - 18 cm (0- 7 in)	14	248 kg (547 lbs)	C890522
Options					
Seeding unit for power harrow 110				70 kg (154 lbs)	C890526
Seeding unit for power harrow 130				76 kg (167 lbs)	C890527
Seeding unit for power harrow 150				90 kg (198 lbs)	C890528

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
110 w/roller													
130 w/roller													
150 w/roller													

Very compatible

Compatible

Not compatible

POWER RAKE

<http://tiny.cc/powerrake>


FEATURES & BENEFITS

- Powerful and fast
- Adjustable working depth
- Tilttable

The MultiOne power rake is the ideal tool for preparing the soil for planting.

Operating the power rake with the gauge wheels down puts the machine in the landscaping mode, conditioning and preparing the soil, creating an ideal bed for seeding. Operating the power rake with the gauge wheels up puts the machine in the tilling mode for more aggressive soil preparation. It is manually tilttable to the right (17°) and to the left (21°)

Since the power rake does not require a lot of power, even the smaller machines work well with this unit.

Note: suggested floating boom valve on machine.



Model	Width	Wheels Height	Weight	Code
135	135 cm (53.1 in)	0 - 8 cm (0 - 3.1 in)	250 kg (551 lbs)	C890685
155	155 cm (61 in)	0 - 8 cm (0 - 3.1 in)	290 kg (640 lbs)	C890686

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
135													
155													

Very compatible

Compatible

Not compatible

STONE BURIER


<http://tiny.cc/stoneburrier>


FEATURES & BENEFITS

- Professional, efficient stone burier
- Top grade finish in just one pass
- Can be equipped with seeding unit - ready lawn surface in a single pass

A professional hydraulic stone burier for preparation of lawn beds. The stone burier mills the soil, buries eventual stones and other objects up to 150 mm depth in a single pass, making a milled and tamped topsoil. Working depth is adjustable with the rear field roller. With the optional seeding unit you are able to make a ready lawn surface on one pass. Stone burier is most commonly used when the topsoil needs to be milled thoroughly.

Note: suggested floating boom valve on machine.

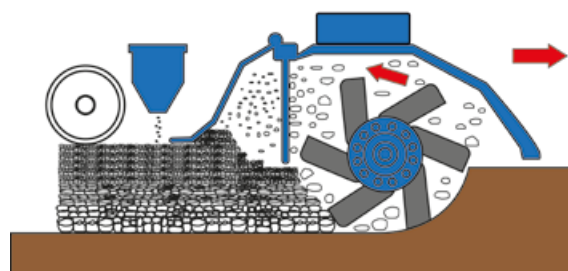

Model	Working width	Working depth	Blades	Weight	Code
114 w/roller	114 cm (44.9 in)	0 - 15 cm (0- 6 in)	36	298 kg (657 lbs)	C890523
132 w/roller	132 cm (52 in)	0 - 15 cm (0- 6 in)	42	335 kg (739 lbs)	C890524
150 w/roller	150 cm (59 in)	0 - 15 cm (0- 6 in)	48	380 kg (838 lbs)	C890525
Options					
Seeding unit for stoneburier 114				70 kg (154 lbs)	C890529
Seeding unit for stoneburier 132				76 kg (167 lbs)	C890530
Seeding unit for stoneburier 150				90 kg (198 lbs)	C890531

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
114 w/roller													
132 w/roller													
150 w/roller													

Very compatible

Compatible

Not compatible

POWER PLOW

<http://tiny.cc/powerplow>


FEATURES & BENEFITS

- The corkscrew action of the blades pulls the plough through the ground
- The soil is discharged on the right hand side
- The horizontal digging action causes little or no hardpan

The MultiOne power plow can effortlessly dig into all types of soil, even hardened, rock-filled dirt that has never been broken. The rotary plow works well in areas with existing sod. It chops and buries the grass and roots and does not tangle easily.

This rotary plow is a powerful and effective method of preparing your soil for planting, and can work effectively in tight working areas, such as next to sidewalks, curbs, and other buildings. The power plow sticks out of the right side of the machine.


The blades once worn out are replaceable.



Model	Max Working Depth	Max Working Width	Weight	Code
Power Plow	25 cm (9.8 in)	35 cm (13.8 in)	93 kg (205 lbs)	C891240

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Not compatible	Not compatible

BRANCH CUTTER
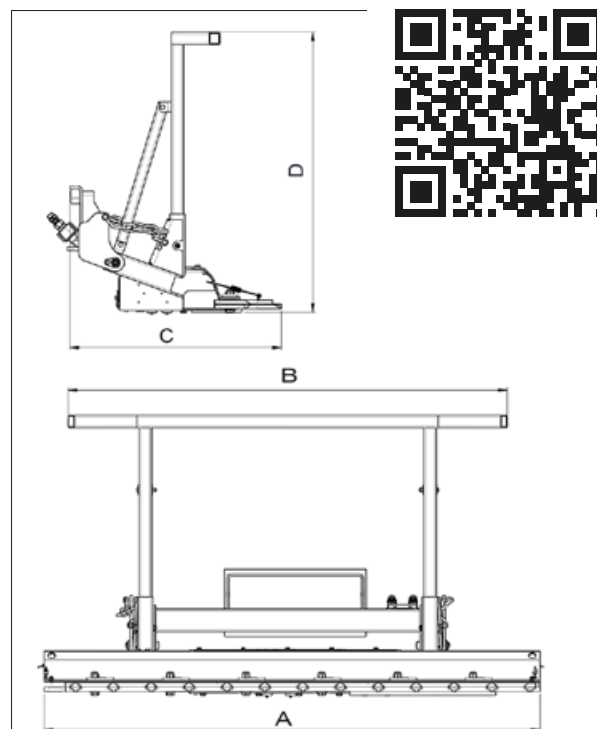
<http://tiny.cc/branchcutter>


	Dimensions (cm/in)			
Model	A	B	C	D
50-150	150 / 59	175 / 69	78 / 31	110 / 43
100-150	166 / 65	175 / 69	84 / 33	110 / 43
100-180	196 / 77	175 / 69	84 / 33	110 / 43

FEATURES & BENEFITS

- Pruning branches and shrubs from 50 mm to 100 mm diameter
- Compact design
- Heavy Duty Frame
- Upper bar

The new branch cutter it's the ideal choice to improve both green and forest maintenance.


It is a robust equipment, suitable for pruning branches and shrubs from 50 mm up to 100 mm diameter with a clean and precise cut without tearing plants. Its compact design guarantees easy handling and possibility of use even in areas with dense vegetation. Best suited for uncultivated rough terrain and heavy overgrown weed fields. The branch cutter is designed with double blade system, the lower blade is fixed while the upper one is hydraulically operated. MultiOne branch cutter cutter top range in terms of design, reliability, speed and cut quality. The bar is made with Hardox blades, which are very strong and resistant to stress.

Tipping frame will prevent damage to branch cutter and machine from oversized shrubbery and bushes. It is also equipped with an upper bar that protects the machine from falling small trees and shrubs.

Model	Cutting Width	Max. cutting diameter	Weight	Code
Branch cutter BT50-150	150 cm (59 in)	5 cm (2 in)	200 kg (441 lbs)	C890953
Branch cutter BT100-150	160 cm (353 in)	10 cm (4 in)	254 kg (560 lbs)	C890954
Branch cutter BT100-180	190 cm (418 in)	10 cm (4 in)	272 kg (600 lbs)	C890952

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
BT50-150													
BT100-150													
BT100-180													


TIMBER GRAB
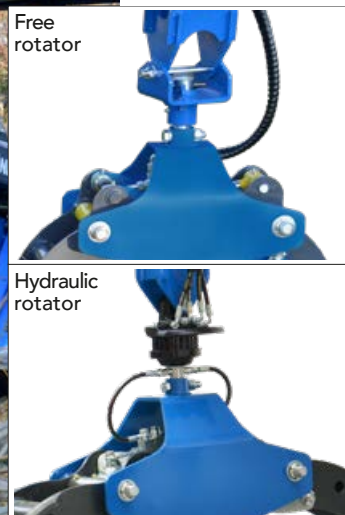
<http://tiny.cc/timbergrab>


FEATURES & BENEFITS

- Available with hydraulic rotator or as freely rotating version
- Versatile attachment for transporting and loading of timber, branches, etc.
- Load holding valve
- Rotating grab allows transporting also lengthwise - makes it possible to pass through narrow places with long logs and facilitates work in dense forest

Timber grab is an attachment that allows you to grab tree trunks, branches, wood waste, kerb stones etc. and transport them both lengthwise and crosswise. This makes it possible to pass through narrow places also with long logs and enables loading on trailer or on a pile in any direction. It is equipped with an upper tooth bar to move the branches and a lower one that avoids the trunk swinging during transport. Timber grab is available either with a hydraulic rotator or as freely rotating version.

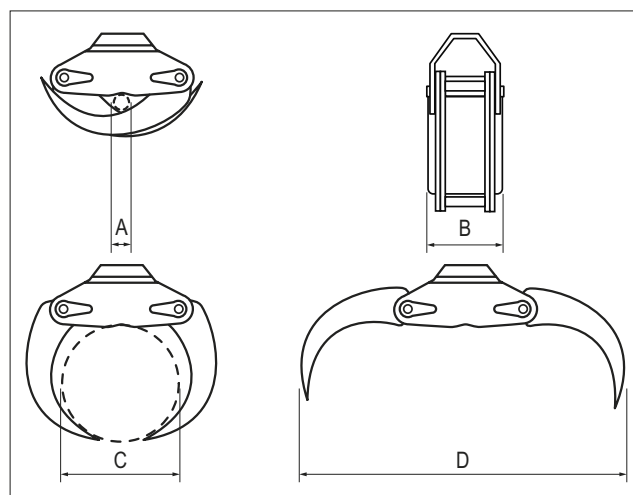

	Dimensions (cm/in)			
Model	A	B	C	D
100	6,5 / 2.6	31 / 12.2	41 / 16	100 / 39.4
120	8 / 3.1	36 / 14	45 / 17.7	120 / 47

Model	Lifting Capacity*	Max Opening Length	Weight	Code
Timber grab 100	1000 kg (2204 lbs)	100 cm (39.4 in)	170 kg (375 lbs)	C890583
Timber grab 120	1500 kg (3037 lbs)	120 cm (47 in)	207 kg (456 lbs)	C890584
Timber grab 120 w/rotator	1500 kg (3037 lbs)	120 cm (47 in)	192 kg (423 lbs)	C890586
Pull bars (set of 2)	/	/	4 kg (9 lbs)	C890587

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Timber grab 100													
Timber grab 120													
Timber grab 120 w/rotator													


Very compatible

Compatible

Not compatible



TREE SHEAR

<http://tiny.cc/treeshear>


FEATURES & BENEFITS

- Powerful and safe tree shear
- Clean and precise cuts
- Excellent tool for forest thinning, tree clearance etc.
- Thanks to the strong grapple the tree is easy to take away
- Available with hydraulic or fixed blade

The MultiOne tree shear is an efficient and useful tree cutter, intended for forest thinning, tree clearance and similar jobs where smaller trees need to be cut. The strong grapple takes a firm grip of the tree trunk and the cutting blade cuts the trunk. The tree is then easy and fast to move away with MultiOne.

Two models are available: with fixed blade for trunk up to 10 cm diameter and with hydraulic blade for trunk up to 15 cm diameter. Through the reach of the MultiOne's boom, this unit can also be used to prune branches, and clear scrub growth in difficult to reach places.



Model	Ø Max Limb	Max Opening	Weight	Code
Hydraulic Blade	15 cm (5.9 in)	50 cm (19.7 in)	380 kg (838 lbs)	C891071
Fixed Blade	10 cm (3.9 in)	60 cm (23.6 in)	200 kg (441 lbs)	C891070


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
Hydraulic Blade													
Fixed Blade													

Very compatible

Compatible

Not compatible

LOG SPLITTER

<http://tiny.cc/logsplitter>


FEATURES & BENEFITS

- **Powerful (7 ton) and safe log splitter**
- **Max. log diameter 400 mm**

The hydraulically powered MultiOne log splitter allows you to safely and quickly split cut logs into firewood.

The wedge, driven by a powerful hydraulic cylinder, allows to split the log in two pieces or in four pieces with the optional tool. The wedge travel is adjustable to avoid downtime.

It is equipped with a large adjustable support table with three positions: high 83 cm (32.7 in), medium 59 cm (23.2 in) and low 35 cm (13.8 in). With a power of 7 ton it is able to split log up to 40 cm diameter.

There are two control levers which have to be activated with both hands for increased safety.

It is equipped with wheels for transport and can also be moved manually using the handle.



Model	Power	Wedge Stroke	Max log diameter	Max log height	Weight	Code
Log splitter	7 ton	55 cm (21.6 in)	40 cm (15.7 in)	100 cm (39.4 in)	110 kg (242 lbs)	C890570


Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible

DUMPER

<http://tiny.cc/dumper2>


FEATURES & BENEFITS

- Cost effective
- High capacity

The MultiOne dumper is a very useful tool used to collect, transport, store, and empty waste. There are two sizes, a 200 l (7 cu ft) unit, and the larger 400 l (14 cu ft). Each of these units can stand on its own when detached from the MultiOne, and easily dumped by the machine when full. The smaller model can be easily unloaded by lifting the machine boom, while the larger model is equipped with a front side that can be open with a lever.



Model	Capacity*	Width	Length	Height	Weight	Code
200	200 l (7 ft ³)	95 cm (37.4 in)	90 cm (35.4 in)	51 cm (20 in)	60 kg (132 lbs)	C890280
400	400 l (14 ft ³)	97,5 cm (38.4 in)	132 cm (52 in)	83 cm (32.7 in)	97 kg (214 lbs)	C890285

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
200													
400													

Very compatible

Compatible

Not compatible

ALUMINIUM RAMPS




FEATURES & BENEFITS

- **Light and Durable**

The sturdy aluminium ramps are durable and lightweight for easy handling. These ramps are designed with deep ridge treads for better traction that enables safe and efficient loading and unloading of the MultiOne from trucks and trailers.

NOTE: When ordering, please specify the machine model, weight, and wheelbase.



Model	Loading capacity per pair	
	Machine wheelbase 100 cm (39 in)	Machine wheelbase 150 cm (59 in)
250	2500 kg (5511 lbs)	3800 kg (8377 lbs)
300	1900 kg (4189 lbs)	2500 kg (5511 lbs)
350	2000 kg (4409 lbs)	2500 kg (5511 lbs)
400	2290 kg (5048 lbs)	2750 kg (6062 lbs)
450	1070 kg (2359 lbs)	1250 kg (2756 lbs)
500	2575 kg (5677 lbs)	2945 kg (6493 lbs)

Model	Length	Internal Width (A)	External Width (B)	Weight	Code
250	250 cm (98.4 in)	34 cm (13.4 in)	40 cm (15.7 in)	43 kg (95 lbs)	C890790
300	300 cm (118 in)	34 cm (13.4 in)	40 cm (15.7 in)	52 kg (115 lbs)	C890791
350	350 cm (138 in)	34 cm (13.4 in)	40 cm (15.7 in)	62 kg (137 lbs)	C890792
400	400 cm (157.5 in)	34 cm (13.4 in)	40 cm (15.7 in)	56 kg (123 lbs)	C890793
450	450 cm (177.2 in)	34 cm (13.4 in)	40 cm (15.7 in)	78 kg (172 lbs)	C890794
500	500 cm (197 in)	34 cm (13.4 in)	40 cm (15.7 in)	86 kg (190 lbs)	C890795


SIDE SHIFT ADAPTER

<http://tiny.cc/sideshiftadapter>


FEATURES & BENEFITS

- Makes it possible to mount the attachment 60 cm (24 in) shifted to the right from the centerline
- Mounts between the attachment and the quick attach plate of the loader

The MultiOne side shift adapter is a simple and strong accessory that is mounted between the attachment and the machine quick attach plate. In this way it is possible to mount the attachment shifted to the right by 60 cm (24 in). It is very useful when, for example, you have to cut grass with a flail mower along the edge of a road.

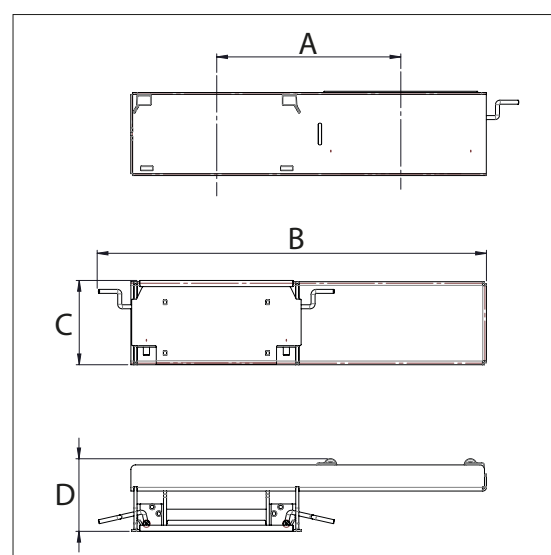

Dimensions				
	A	B	C	D
cm	60	127	27	24
in	23.6	49.8	10.8	9.3

Model	Side Shift	Max Load*	Weight	Code
Side Shift Adapter	60 cm (23.6 in)	1000 kg (2204 lbs)	60 kg (133 lbs)	C890910

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible


Compatible

Not compatible



TILT ADAPTER

<http://tiny.cc/tiltadapter>



FEATURES & BENEFITS


- Makes it possible to tilt the attachment sideways and e.g. grade the ground with a bucket or leveller, or load pallets on uneven ground with pallet fork
- Mounts between the attachment and the quick attach plate of the loader

MultiOne tilt adapter is mounted between the attachment and the loader's attachment coupling plate. With it the attachment can be tilted sideways, and makes it possible to:

- Make different forms to the ground with a bucket or leveller
- Keep pallet fork level when you are driving on surfaces with gradient
- Load pallets that are on uneven ground
- Level ground on uneven surfaces

Tilt adapter with max. 14,5 degree tilting in both directions. It is ideal for buckets, leveller and pallet fork – for jobs where tilting is a must but the tilting angle doesn't have to be big

The tilt adapter is intended mainly for nonhydraulically operated attachments, but with the optional second auxiliary hydraulics outlet in the front it is possible to mount also hydraulically driven attachments like a 4 in 1 bucket, pallet fork with hydraulic fork adjustment, grabbing tool, artificial turf attachment and rock drill at the same time.

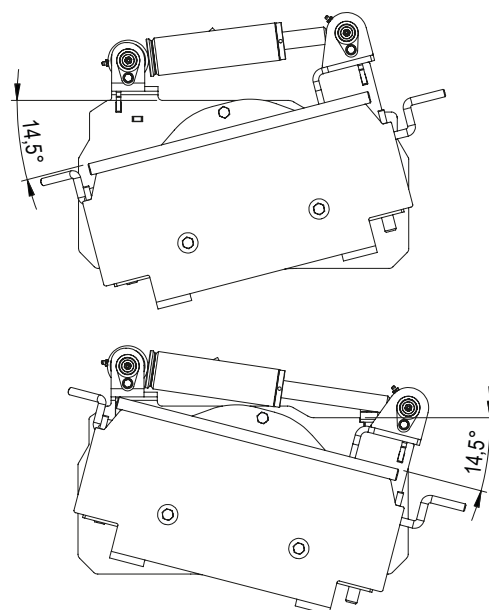

Model	Max tilt	Max Load*	Length	Weight	Code
Tilt adapter	+/- 14.5°	500 kg (1102 lbs)	14 cm (5.5 in)	52 kg (115 lbs)	C890190

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8

Very compatible

Compatible

Not compatible



ATTACHMENT ROTATOR

<http://tiny.cc/attachmentrotator>


FEATURES & BENEFITS

- **360° rotation**
- **Mounts between the attachment and the quick attach plate of the loader**

The attachment rotator is designed for a 360°, smooth, continuous motion in both directions. The attachment rotator is commonly used in many jobs for inverting and dumping loads.

Like the tilt adapters, the attachment rotator mounts between the attachment and the loader's attachment coupling plate. It is equipped with a hydraulic motor and a slewing ring that allow the 360° rotation. Maximum load capacity is 1.200 kg. The rotator attachment coupling plate is 255 mm further away from the machine's attachment coupling plate.

The attachment rotator is intended mainly for non-hydraulically operated attachments, but with the optional second auxiliary hydraulics outlet on the loader it is possible to use with hydraulically driven attachments also like a 4 in 1 bucket, pallet fork with hydraulic fork adjustment, grabbing tool, etc.. at the same time.

Model	Max tilt	Max Load*	Weight	Code
Attachment rotator	360 °	1200 kg (2645 lbs)	73 kg (161 lbs)	C890960

(*) verify the lifting capacity of the machine

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible



MULTI CONNECTOR ADAPTOR FOR MACHINES



Adaptor for machines, in order to connect standard flat face single lines connections. Suggested for attachments equipped with hydraulic cylinders, not with hydraulic motors. The adaptor has 3 lines to fulfill the connections with any kind of attachments.

Model												Code	
Multiconnector to single line quick coupling, 3 lines for machines												C880221	
Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Very compatible				Compatible				Not compatible					

ATTACHMENT COUPLING PLATE




This plate can be welded to attachments that do not have the MultiOne style of mounting plate, making all attachments usable on the MultiOne. NOTE: The following need to be checked before using this coupling plate (at customer charge):

- Applicable laws and safety requirements.
- Machine and hydraulic circuit interface.

Model												Code	
Attachment coupling plate (to be welded) for MultiOne - 6 mm thickness												C880233	
Attachment coupling plate (to be welded) for MultiOne - 12 mm thickness												C880236	
Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Very compatible				Compatible				Not compatible					

SKID-STEER ATTACHMENT ADAPTER PLATE

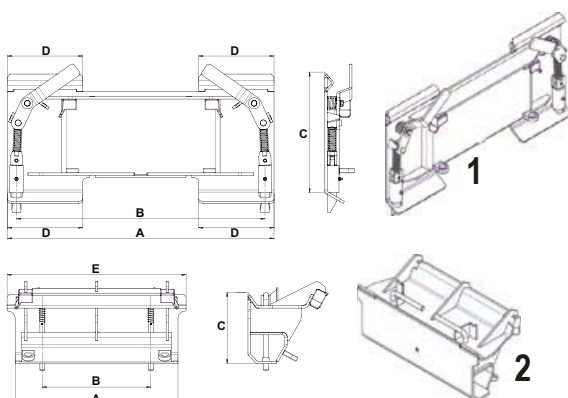

Coupling adapter suitable to mount skid steer attachments on MultiOne mini loader.

Dimensions (mm/in)					
	A	B	C	D	E
Mod. 1	885 35	825 32.5	401 16	250 9.8	/
Mod. 2	543 21.4	362 14	238 9.4	/	597 23.5

Model												Weight	Code
1 - MT skid steer attachment adapter plate												/	C890023
2 - Mini skid steer attachment adapter plate												36 kg (79 lbs)	C880230
Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Very compatible				Compatible				Not compatible					

ATTACHMENTS IN ALPHABETICAL ORDER

AERIAL WORK PLATFORM	112	MINI DIGGER	87
ALUMINIUM RAMPS	156	MULTI CONNECTOR ADAPTOR FOR MACHINES	160
ARTICULATED SIDE ARM M1-30	127	NEW GENERAL BUCKET	57
ATTACHMENT COUPLING PLATE	160	NEW LIGHT MATERIAL BUCKET	63
ATTACHMENT ROTATOR	159	OPTIONS FOR AUGER	91
AUGER	90	PALLET FORK	65
BACKHOE	88	PALLET FORK HYDRAULIC CLAMP	66
BALE FORK	76	PALLET FORK WITH SIDE SHIFT	69
BALE HANDLER	74	POWER AUGER FOR TREE PLANTING	144
BIG BAG LIFTER	68	POWER HARROW	140
BRANCH CUTTER	148	POWER PLOW	143
CEMENT MIXER	93	POWER RAKE	141
COLD PLANER	95	PUSH BROOM	83
COMBO BUCKET	59	RADIO CONTROLLED BACKHOE	89
CONCRETE MIXING BUCKET	94	RIPPER	138
CORE AERATOR	122	ROLLER	137
DEBRIS AND LEAF BLOWER	101	ROTARY SWEEPER	103
DEMOLITION GRAPPLE BUCKET	61	ROTARY TILLER	139
DOZER BLADE	85	RUBBER SCRAPER	82
DROP SPREADER	108	SALT AND SAND SPREADER	107
DUAL BLADE HEDGE TRIMMER	130	SCREENING BUCKET	97
DUMPER	154	SCREW FEED PUSHER	81
FEED DISPENSER	80	SICKLE BAR MOWER	124
FLAIL MOWER	115	SIDE BOOM WITH FLAIL MOWER DZ1	117
FLAIL MOWER WITH SIDE SHIFT	114	SIDE BOOM WITH FLAIL MOWER DZ2	118
FORESTRY MULCHER	147	SIDE SHIFT ADAPTER	157
GENERAL BUCKET	56	SKID-STEER ATTACHMENT ADAPTER PLATE	160
GRADER	92	SNOW BLADE	104
GRAPPLE BUCKET	60	SNOW BLOWER	106
HAY BALE GRAPPLE	75	SNOW PLOW	105
HEAVY DUTY FLAIL MOWER	116	SOLAR PANEL WASHER	102
HEAVY DUTY SILAGE FORK	72	SPIKE AERATOR	121
HEDGE CUTTER	123	SPRAYER	128
HIGH PRESSURE WASHER	110	SQUARE BALE CLAMP	77
HIGH TIP BUCKET	64	STAINLESS STEEL TIPPING DUMPER	132
HIVE HANDLER	84	STAKE INSTALLER	111
HORSE ARENA HARROW	78	STONE BURIER	142
HORSE STABLE PACKER	79	STREET WASHER	113
HYDRAULIC BIO SHREDDER	155	STRING SHOOT REMOVER	129
HYDRAULIC BREAKER	96	STUMP GRINDER	146
INTER-ROW MOWER	131	SWEEPER WITH COLLECTOR BOX	98
JIB CRANE, ONE-PIECE OR TELESCOPIC	67	SWING STUMP GRINDER	145
JOB SITE TOOLBOX	71	TELESCOPIC SIDE ARM M1-15	126
LANDSCAPE POT CLAMP	125	TILT ADAPTER	158
LAWN MOWER	120	TIMBER GRAB	149
LEAF VACUUM	99	TORNADO LAWN MOWER	119
LEVELER	136	TRAILER	109
LEVELLING BUCKET	58	TREE SHAKER WITH COLLECTOR	133
LIFTING TROLLEY	70	TREE SHEAR	151
LIGHT MATERIAL BUCKET	62	TRENCHER	86
LOG GRAPPLE	152	VINEYARD SPRAYER	134
LOG SPLITTER	153	VINEYARD TOOL CARRIER	135
MANURE FORK	73	WEED BRUSH	100
		WINCH	150

MULTI¹ONE

WHATEVER YOU NEED
MULTIONE CAN DO IT



DEPL/PRODUCTS-HANDBOOK R.220-EN

WWW.MULTIONE.COM

MultiOne srl
via Palù, 6/8

36040 Grumolo delle Abbadesse

Vicenza - Italy

info@multione-csf.com

The information and images herein contained are provided for illustrative purposes only and are not binding on MultiOne, who reserves the right to change them at any time without notice. 2022 MultiOne srl. All rights reserved.